
SITE DEVELOPMENT PLAN VILLAGE APARTMENTS - PHASE III NEW MULTIFAMILY APARTMENT BUILDINGS

15 JEROME AVENUE, 82 JEROME ROAD AND 232 ROUTE 32, UNCASVILLE-MONTVILLE, CONNECTICUT

> DATE: MARCH 11, 2021 REVISED: NOVEMBER 15, 2021

PROPERTY OWNER/APPLICANT: **VILLAGE APARTMENTS LLC & CONNECTICUT** MULTIFAMILY EQUITIES II, LLC 1099 NORTH STREET, WHITE PLAINS, NY 10605

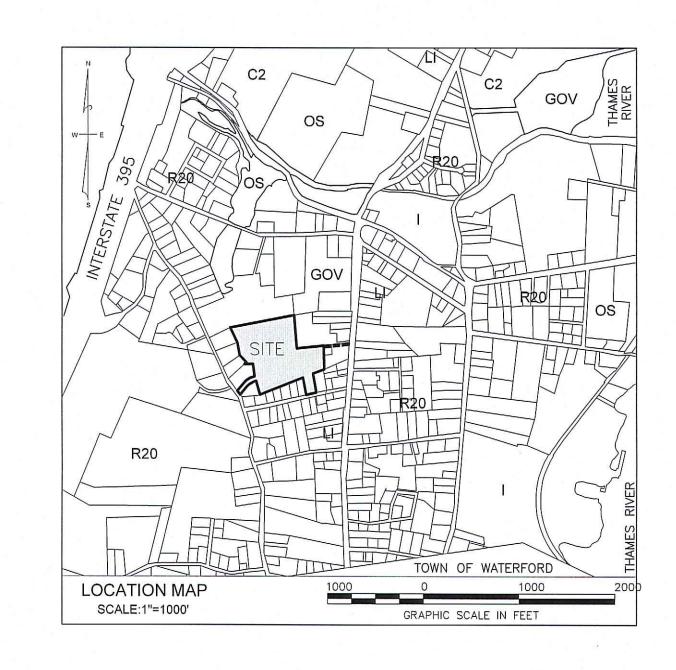



INDEX TO SHEETS				
TITLE	SHEET NO.			
COVER SHEET	1			
LEGEND AND NOTES	2			
EXISTING CONDITIONS SURVEY	3			
DEMOLITION PLAN	. 4			
SITE LAYOUT AND UTILITIES PLAN	5			
GRADING AND DRAINAGE PLAN	6			
EROSION & SEDIMENT CONTROL PLAN	7			
WETLAND MITIGATION & STORMWATER BASIN PLANTING PLAN	8			
DETAILS	9 - 12			
SITE PLANTING PLAN	13			

Prepared By:



Loureiro Engineering Associates, Inc. 100 Fort Hill Road • Groton, Connecticut 06340 **reiro** Phone: 860-448-0400 • Fax: 860-448-0899 An Employee Owned Company • www.Loureiro.com Engineering • Construction • EH&S • Energy Waste • Facility Services • Laboratory

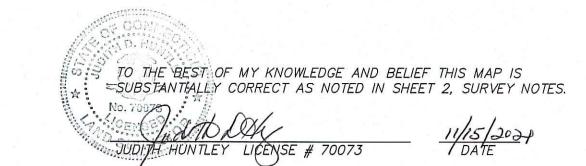





2/16/2021 DATE



SURVEY NOTES:

- THIS PLAN AND THE SURVEY IT IS BASED ON HAVE BEEN PREPARED IN ACCORDANCE WITH THE REGULATIONS OF CONNECTICUT STATE AGENCIES, SECTIONS 20-300B-1 THROUGH 20-300B-20, "MINIMUM STANDARDS FOR SURVEYS AND MAPS IN THE STATE OF CONNECTICUT" ENDORSED BY THE CONNECTICUT ASSOCIATION OF LAND SURVEYORS, INC. THE TYPE OF SURVEY IS A PROPERTY SURVEY, THE BOUNDARY DETERMINATION CATEGORY IS A DEPENDENT RESURVEY AND THE HORIZONTAL ACCURACY CONFORMS TO CLASS A-2. TOPOGRAPHIC SURVEY IS CLASS T-2 AND THE VERTICAL ACCURACY CONFORMS TO CLASS
- REFERENCE IS MADE TO TOWN OF MONTVILLE LAND EVIDENCE RECORDS FOR THE

REGARDING 82 JEROME ROAD:

VOLUME 515 AT PAGE 149 FOR A QUIT CLAIM DEED DATED AUGUST 30, 2007

REGARDING 15 JEROME AVENUE:

VOLUME 582 AT PAGE 1061 FOR A WARRANTY DEED DATED APRIL 19, 2013

REGARDING 232 ROUTE 32:

VOLUME 650 AT PAGE 706 FOR A WARRANTY DEED DATED NOVEMBER 20, 2019

THE PROPERTY SHOWN HEREON MAY BE SUBJECT TO OR BENEFIT BY THE FOLLOWING

REGARDING 82 JEROME ROAD:

EASEMENTS, RIGHTS OF WAY AND/OR AGREEMENTS:

- A. SEE VOLUME 102 AT PAGE 418 REGARDING AN EASEMENT IN FAVOR OF SOUTHERN NEW ENGLAND TELEPHONE
- B. SEE VOLUME 102 AT PAGE 80 REGARDING A FIFTY FOOT WIDE RIGHT OF WAY FOR INGRESS AND EGRESS IN FAVOR OF LAND NOW SHOWN AS "N/F JOHN C. MORIARTY"
- C. SEE VOLUME 21 AT PAGE 340 REGARDING A RIGHT TO TAKE AND USE WATER FROM A SPRING (SEE VOLUME 159 AT PAGE 356 REGARDING A RELEASE AND TERMINATION OF
- D. SEE VOLUME 24 AT PAGE 174 REGARDING A RIGHT TO TAKE WATER FROM A WELL AND TO LAY HALF INCH PIPE
- F. SEE VOLUME 19 AT PAGE 221 REGARDING A RIGHT TO RAISE WATER LEVEL AT DAM BY 3.5 FEET GRANTED TO UNCASVILLE MANUFACTURING COMPANY ON SEPTEMBER 16, 1873
- F. SEE VOLUME 21 AT PAGE 99 REGARDING A 33 FOOT WIDE (2 RODS) RIGHT OF WAY RESERVED ACROSS LAND SHOWN AS "N/F STANLEY P. WARD, JR. & ROSE MARY WARD" ALSO SEE VOLUME 21 AT PAGE 100
- G. MAY ALSO BE SUBJECT TO A RIGHT OF WAY IN FAVOR OF LAND SHOWN AS "N/F STANLEY P. WARD, JR. & ROSE MARY WARD" - SEE MAP REFERENCE D
- H. SEE VOLUME 505 AT PAGE 150 FOR VARIANCE 207-ZBA-01 GRANTED TO EXPAND FOOTPRINT OF BUILDING #2 (NON-CONFORMING USE)
- I. SEE VOLUME 526 AT PAGE 942 FOR VARIANCE 208-ZBA-3 GRANTED TO INCREASE
- J. MAY BE SUBJECT TO RIPARIAN RIGHTS, IF ANY, OF OTHERS IN AND TO A BROOK RUNNING ACROSS THE WESTERLY PORTION OF THE SUBJECT PROPERTY

REGARDING 15 JEROME AVENUE:

NONE FOUND OF RECORD REGARDING 232 ROUTE 32:

- K. SEE VOLUME 57 AT PAGE 360 REGARDING AN EASEMENT IN FAVOR OF SOUTHERN NEW ENGLAND TELEPHONE (FROM POLE TO HOUSE AND FROM HOUSE UNDERGROUND TO TRAILER FORMERLY LOCATED ON SITE)
- L. SEE VOLUME 53 AT PAGE 102 REGARDING A POLE LINE EASEMENT IN FAVOR OF CONNECTICUT LIGHT AND POWER COMPANY
- M. SEE VOLUME 52 AT PAGE 15 REGARDING A RIGHT TO USE THE DRIVEWAY FOR THE PURPOSE OF ENTERING OR LEAVING THE PREMISES EITHER ON FOOT OR WITH VEHICLES. ALSO SEE VOLUME 52 AT PAGE 16 REGARDING RIGHTS OF OTHERS TO USE
- N. SEE VOLUME 52 AT PAGE 15 SUBJECT TO A RIGHT OF OTHERS TO MAINTAIN AND REPAIR A PIPE LINE RUNNING THROUGH THE PREMISES TO ROUTE 32 - LOCATION UNKNOWN
- 4. THE SUBJECT PROPERTIES ARE LOCATED ENTIRELY WITHIN THE TOWN OF MONTVILLE R20-M (RESIDENTIAL MULTIFAMILY) ZONE DISTRICT.
- "NATIONAL FLOOD INSURANCE PROGRAM FLOOD INSURANCE RATE MAP NEW LONDON COUNTY, CONNECTICUT, ALL JURISDICTIONS, PANEL 361 OF 554, COMMUNITY: MONTVILLE TOWN OF, NUMBER: 090099, PANEL: 0361, SUFFIX: J, MAP NUMBER: 09011C0361J, EFFECTIVE DATE: AUGUST 5, 2013, FEDERAL EMERGENCY MANAGEMENT AGENCY" INDICATES THAT A PORTION OF THE SUBJECT PROPERTY IS LOCATED WITHIN FLOOD HAZARD ZONE AE (EL 69), AND THE REST OF THE SUBJECT PROPERTY IS LOCATED WITHIN FLOOD HAZARD ZONES X (0.2% ANNUAL CHANCE FLOOD) AND X (OUTSIDE 0.2% ANNUAL CHANCE FLOODPLAIN).
- 6. THE SUBJECT PROPERTIES ARE SHOWN ON THE TOWN OF MONTVILLE TAX ASSESSOR MAP 69 AS LOT 42 WITH AN ASSIGNED STREET ADDRESS OF 82 JEROME ROAD, UNCASVILLE, CT 06382, AS LOT 51 WITH AN ASSIGNED ADDRESS OF 15 JEROME AVENUE, UNCASVILLE, CT 06382 AND AS LOT 61 WITH AN ASSIGNED ADDRESS OF 232 ROUTE 32, UNCASVILLE, CT
- 7. THE BASIS FOR BEARINGS AND COORDINATES IS CONNECTICUT COORDINATE SYSTEM OF 1983. ELEVATIONS ARE REFERENCED TO NAVD 88. (GNSS)
- 8. THIS PLAN REPRESENTS THE LOCATION OF THE BOUNDS AND BUILDINGS AS DETERMINED BY FIELD SURVEY ON AUGUST 20, 2020. RECORD TITLE AND ADJOINER INFORMATION WAS OBTAINED FROM TAX ASSESSOR AND LAND EVIDENCE RECORDS ON JULY 16, 2007 AND UPDATED ON AUGUST 24, 2020.
- 9. INLAND WETLANDS WERE DELINEATED IN THE FIELD BY JAMES R. COWEN, COWEN ECODESIGN, LLC AND LOCATED BY LOUREIRO ENGINEERING INC., GROTON, CONNECTICUT
- 10. LOCATION OF UNDERGROUND UTILITIES SHOWN ARE APPROXIMATE TAKEN FROM MAPPING BY OTHERS AND SHOULD BE FIELD VERIFIED PRIOR TO EXCAVATION. (SEE MAP REFERENCES

MAP REFERENCES:

- A. PROPERTY SURVEY PLAN, "VILLAGE APARTMENTS", PROPERTY OF VILLAGE APARTMENTS <u>L.C.</u>, JEROME ROAD, MONTVILLE, CONNECTICUT, SCALE: 1"=40', DATE: DECEMBER 8, 1999, REVISED THROUGH 4-7-03, BY ANGUS MCDONALD, GARY SHARPE & ASSOCIATES, INC., OLD SAYBROOK, CT.
- B. "VILLAGE APARTMENTS", BOUNDARY SURVEY PROPERTY TO BE CONVEYED TO JONATHON BARRES, HERSTER BARRES AND DAVID KLEEMAN, JEROME ROAD, MONTVILLE, CONNECTICUT, SCALE: 1"=40', DATE: MARCH 30, 1984, PREPARED BY: REESE G. ROBERTS, WINDSOR, CONNECTICUT.
- C. PLAN OF PROPERTY IN THE TOWN OF MONTVILLE, CT., TO BE CONVEYED BY EDITH M, CALVERT TO EDWIN MERRIMAN AND EDITH L. MERRIMAN, SEPT. 1938, SCALE: 1 INCH= 30 FEET., BY L.E. DABOLL, CIVIL ENG'R., NEW LONDON, CONN.
- D. PLAN OF THE SEPOWITZ PROPERTY, JEROME ROAD, MONTVILLE, CONNECTICUT, DATE: JULY 1982, REVISED: AUGUST, 1984, SCALE: 1"=50', BY WAYNE A. MORSE CIVIL ENGR.
- E. PROPERTY SURVEY, PROPERTY OF VILLAGE APARTMENTS, LLC, 82 JEROME ROAD, UNCASVILLE, CONNECTICUT, SCALE: 1"=40', DATE: JULY 31, 2007, DICESARE-BENTLEY ENGINEERS, INC., GROTON, CONNECTICUT. (TOWN OF MONTVILLE LAND RECORDS #2204)
- F. VILLAGE APARTMENTS BUILDING #2, 82 JEROME ROAD, MONTVILLE, CONNECTICUT, APPLICANT/OWNER: VILLAGE APARTMENTS, LLC, DATE: JUNE 12, 2007, REVISED THROUGH MARCH 11, 2008, BY DICEARE-BENTLEY ENGINEERS, INC., GROTON,
- G. PROPERTY SURVEY PROPERTY OF KATHLEEN B. FLETCHER, 232 NORWICH-NEW LONDON TURNPIKE (CONNECTICUT ROUTE 32) UNCASVILLE, CONNECTICUT, SCALE: 1" = 30', JUNE 6, 2014, DICESARE-BENTLEY ENGINEERS, INC., GROTON, CONNECTICUT.
- H. PROPERTY SURVEY PROPERTY OF CONNECTICUT MULTIFAMILY EQUITIES II, LLC, 15 JEROME AVENUE, UNCASVILLE, CONNECTICUT, SCALE: 1" = 20', JUNE 6, 2014, DICESARE-BENTLEY ENGINEERS, INC., GROTON, CONNECTICUT.
- PROPERTY SURVEY, PROPERTY OF VILLAGE APARTMENTS, LLC, 82 JEROME ROAD, UNCASVILLE, CONNECTICUT, SCALE: 1"=40', DATE: FEBRUARY 21, 2013, DICESARE-BENTLEY ENGINEERS, INC., GROTON, CONNECTICUT.
- J. CHERENZIA EXCAVATION UTILITY ASBUILT DRAWING FOR VILLAGE APARTMENTS BUILDING #2 82 JEROME ROAD MONTVILLE, CT SCALE 1"=30' AUGUST 2009
- K. MONTVILLE WATER SYSTEM PROJECT PLNA AND PROFILE JEROME AVENUE STA. 0+50 TO STA. 11+00 DATE JULY 1984 SHEETS 6 AND 7 OF 22 BY MOFFITT AND DUFFY, INC. EAST

SITE NOTES:

- THIS SITE PLAN IS FOR THE CONSTRUCTION OF THREE NEW MULTI-FAMILY APARTMENT BUILDINGS WITH 160 UNITS, 286 NEW PARKING SPACES AND ASSOCIATED SITE IMPROVEMENTS.
- THESE PLANS ARE FOR PERMIT PURPOSES AND SITE PLAN APPROVAL ONLY. THEY ARE NOT CONTRACT DOCUMENTS. FOR EXACT BUILDING DIMENSIONS, SEE BUILDING PLANS PROVIDED BY
- BUILDING COVERAGE CALCULATION:
- A. BUILDING AREA = 42,340 SF (3 NEW BUILDINGS) + 18,100 SF (2 EXISTING BUILDINGS) = 60,440 SF
- B. LOT AREA = 523,700 SF

C. BUILDING A (NEW):

- C. BUILDING AREA/LOT AREA = 11.5% BUILDING DWELLING UNIT DENSITY DESCRIPTION:
- A. BUILDING 1 (EXISTING):
- ONE BEDROOM DWELLING UNITS: TWO OR MORE BEDROOM DWELLING UNITS: 22 UNITS
- B. BUILDING 2 (EXISTING): TWO OR MORE DWELLING UNITS: 24 UNITS
- ONE BEDROOM DWELLING UNITS: 9 UNITS TWO OR MORE BEDROOM DWELLING UNITS: 35 UNITS
- D. BUILDING B (NEW): ONE BEDROOM DWELLING UNITS: 14 UNITS
- TWO OR MORE BEDROOM DWELLING UNITS: 44 UNITS
- E. BUILDING C (NEW): ONE BEDROOM DWELLING UNITS:
- 14 UNITS TWO OR MORE BEDROOM DWELLING UNITS: 44 UNITS TOTAL DWELLING UNITS: 214 UNITS

DWELLING UNIT DENSITY CALCULATION:

PERMITTED: 1 UNIT PER 2,420 SQUARE FEET OF LAND

523,700 SQUARE FEET PARCEL AREA: PROVIDED:

- BUILDING ROOF HEIGHT BUILDING B BUILDING C ELEVATION OF ROOF PEAK: 128.2 149.2 140.2 AVG. BLDG. PERIMETER ELEV. 85.9 95.1 85.4 BUILDING ROOF HEIGHT: 42.3' 54.1' 54.8'
- 7. LANDSCAPING REQUIREMENTS:
 - A. LANDSCAPE BUFFER (PER SECTION 9B.12 OF THE ZONING REGULATIONS):
 - 1. REQUIRED: 10' WIDE STRIP ALONG THE REAR LOT LINE WITH ONE SHADE TREE PLANTED AT LEAST THREE INCHES (3") IN CALIPER FOR EACH FIFTY FEET (50') OR PART THEREOF OF ANY PORTION OF SUCH SIDE OR REAR LOT LINE LOCATED ADJACENT TO A BUILDING IN THE MULTI-FAMILY HOUSING DEVELOPMENT.
 - 2. PROVIDED: ±10' (MIN.) WIDE STRIP ALONG THE REAR AND SIDE LOT LINES ADJACENT TO NEW BUILDINGS A, B AND C. REFER TO SITE PLANTING PLAN ON SHEET 13.
 - B. LANDSCAPED PARKING AREA (PER SECTION 18.16 OF THE ZONING REGULATIONS):
 - MINIMUM REQUIRED LANDSCAPED AREA:
 - TEN PERCENT (10%) OF THE PARKING LOT AREA, EXCLUSIVE OF BUILDING COVERAGE (143,700)X(0.10)=14,370 SF
 - PROVIDED LANDSCAPED AREA:
 - 17,570 SF (4 NEW LANDSCAPE ISLANDS) +
 - 37,560 SF (ADJACENT REAR AND SIDE YARD AREAS)
 - THE LANDSCAPED AREA ALONG THE PARKING PERIMETER SHALL BE PLANTED WITH GRASS
- SHRUBS AND TREES. REFER TO SITE PLANTING PLAN ON SHEET 13.
- A. TOTAL PARKING REQUIRED PER PARKING PLAN: 257 REQUIRED SPACES (SEE SITE NOTE 8C)
- B. TOTAL PARKING PROVIDED:
- 101 EXISTING SPACES
- 31 REPLACEMENT SPACES EAST OF BUILDING 2
- +286 NEW SPACES
- = 356 PROVIDED SPACES
- TOTAL PARKING PROVIDED PER PARKING PLAN PREPARED BY LOUREIRO ENGINEERING ASSOCIATES DATED NOVEMBER 15, 2021.
- SECTION 19.2 OF THE ZONING REGULATIONS ALLOWS ONE (1) 15 SF SIGN WITH THE NAME AND ADDRESS OF THE PROPERTY WHEN LOCATED ON AN ARTERIAL OR COLECTOR ROAD.
- PRIOR TO ANY EXCAVATION IT IS THE CONTRACTOR'S RESPONSIBILITY TO NOTIFY CALL BEFORE YOU DIG SHALL AT 1-800-922-2255 AND OTHER APPROPRIATE UTILITY AUTHORITIES.
- 11. SITE LIGHTING SHALL BE SHIELDED TO DIRECT LIGHT AND GLARE AWAY FROM ALL ADJOINING
- 12. NEW SIDEWALKS, RAMPS AND DRIVEWAYS SHALL BE INSTALLED TO PROVIDE SMOOTH TRANSITION FOR PEDESTRIANS AND VEHICLES.
- 13. ALL CURB/HANDICAP RAMP DESIGNS SHALL CONFORM TO ANSI STANDARDS. 14. ALL TRAFFIC CONTROL SIGNS AND PAVEMENT MARKING SHALL CONFORM TO "MANUAL OF UNIFORM
- MARKING) SHALL BE WHITE PAINT. THE ACCESSIBLE PARKING SYMBOL SHALL BE LT BLUE PAINT. 15. THERE SHALL BE NO ACTIVITY WITHIN THE INLAND WETLAND OR 50 FOOT UPLAND REVIEW AREA UNLESS PERMITTED AS SHOWN ON THIS PLAN OR OTHERWISE PERMITTED BY THE MONTVILLE

TRAFFIC CONTROL DEVICES" STANDARDS. ALL PARKING LOT STRIPING (EXCEPT FIRE LANE

- 16. A STATE TRAFFIC COMMISSION PERMIT WILL BE REQUIRED, OR A FINDING OF NO NEED FOR PERMIT, BEFORE ISSUANCE OF BUILDING PERMITS WHERE A DEVELOPMENT INVOLVES OVER 200 PARKING SPACES OR 100,000 SQUARE FEET OF FLOOR AREA.
- 17. TRASH COLLECTION SHALL BE CONDUCTED AT LEAST ONCE PER WEEK AND SHALL BE LIMITED TO MONDAY TO FRIDAY 7:00 AM TO 6:00 PM. 18. ALL SITE IMPROVEMENTS WITHIN THE TOWN'S RIGHT OF WAY (INCLUDING BUT NOR LIMITED TO
- SHALL BE OBTAINED FROM THE PUBLIC WORKS DEPARTMENT. 19. ALL EXISTING CURBING, PAVEMENT, ETC. DISTURBED AS A RESULT OF CONSTRUCTION ACTIVITIES SHALL BE REPLACED/RESTORED TO ORIGINAL CONDITION BY THE CONTRACTOR.

CURB CUTS, UTILITY SERVICE EXTENSIONS AND ROADWAY PAVEMENT PATCHING) SHALL BE

CONSTRUCTED PER THE TOWN OF MONTVILLE ROAD STANDARDS AND AN EXCAVATION PERMIT

UTILITY NOTES:

- 1. ALL EXISTING UTILITY LOCATIONS ARE APPROXIMATE AND SHALL BE FIELD VERIFIED PRIOR TO CONSTRUCTION.
- 2. ALL NEW UTILITIES, INCLUDING CATV, WILL BE LOCATED UNDERGROUND.
- 3. ALL WATER MAIN AND SANITARY SEWER CONSTRUCTION SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MONTVILLE WATER POLLUTION CONTROL AUTHORITY.
- WATER SERVICE INSTALLATION NOTES:
- A. APPROVED BACKFLOW PREVENTERS ARE REQUIRED ON ALL FIRE SPRINKLER AND DOMESTIC WATER LINES.
- B. WATER MAINS MINIMUM COVER SHALL BE 4'-6" FROM FINISH GRADE.
- C. PIPE SEPARATIONS:
- 10' MINIMUM BETWEEN WATER AND SEWER 10' MINIMUM BETWEEN WATER AND BUILDINGS
- 5' MINIMUM BETWEEN WATER AND CATCH BASINS OR DRAIN PIPES
- SCHEMATIC UNDERGROUND UTILITIES (ELECTRIC, TELEPHONE, COMMUNICATIONS) ARE SHOWN FOR INFORMATIONAL PURPOSES ONLY. FINAL LOCATIONS WILL BE DETERMINED BY THE RESPECTIVE UTILITY PROVIDERS AND INSTALLATION SHALL CONFORM TO UTILITY AUTHORITY
- ALL WATER MAIN AND SANITARY SEWER CONSTRUCTION SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MONTVILLE WATER POLLUTION CONTROL AUTHORITY.
- SANITARY SEWER INVERTS FOR BUILDING 1 & 2 ARE APPROXIMATE AND ARE FROM MAP REFERENCE J. THE CONTRACTOR SHALL VERIFY ALL BUILDING SEWER INVERTS AND SHALL NOTIFY THE ENGINNER OF ANY DISCREPENCIES PRIOR TO CONSTRUCTING NEW SEWERS.

STORMWATER MANAGEMENT SYSTEM MAINTENANCE PLAN:

THE PROPERTY OWNER IN WRITING WHERE THE MATERIAL IS BEING DISPOSED.

- CATCH BASINS AND MANHOLES 1. A CONNECTICUT-LICENSED HAULER SHALL PUMP THE SUMPS OF ON-SITE CATCH BASINS AND MANHOLES, AND SHALL DISPOSE OF THE PUMPING LEGALLY. ROAD SAND MAY BE REUSED FOR WINTER SANDING, BUT MAY NOT BE STORED ON-SITE. AS PART OF THE HAULING CONTRACT, THE HAULER SHALL NOTIFY
 - EACH CATCH BASIN SHALL BE INSPECTED EVERY FOUR MONTHS, WITH ONE INSPECTION OCCURRING DURING THE MONTH OF APRIL. ANY DEBRIS OCCURRING WITHIN ONE FOOT FROM THE BOTTOM OF EACH SUMP SHALL BE REMOVED BY VACUUM "VACTOR" TYPE OF MAINTENANCE EQUIPMENT.

STORMTECH UNDERGROUND INFILTRATION/DETENTION SYSTEM 3. THE ISOLATOR ROWS SHALL BE CLEANED AT THE END OF CONSTRUCTION ONCE THE CONTRIBUTING AREAS ARE FULLY STABILIZED. FOR THE FIRST YEAR OF OPERATION FOLLOWING CONSTRUCTION, THE

- CHAMBER ROWS SHALL BE INSPECTED ONCE EVERY 6 MONTHS. 4. AFTER THE FIRST YEAR OF OPERATION, THE CHAMBERS SHALL BE INSPECTED A MINIMUM OF ONCE PER YEAR. IF UPON VISUAL INSPECTION IT IS FOUND THAT SEDIMENT HAS ACCUMULATED, A STADIA ROD SHOULD BE INSERTED TO DETERMINE THE DEPTH OF THE SEDIMENT. WHEN THE AVERAGE DEPTH OF ACCUMULATION EXCEEDS 3", A CLEAN-OUT SHOULD BE PERFORMED AND PROPERLY DISPOSED OFF-SITE.
- 5. A DETAILED MAINTENANCE LOGBOOK SHALL BE KEPT ON-SITE FOR THE UNITS BY THE PROPERTY OWNER/MANAGER. INFORMATION IS TO INCLUDE, BUT NOT BE LIMITED TO, THE DATE OF INSPECTION, RECORD OF SEDIMENT DEPTH, GENERAL OBSERVATIONS, AND DATE OF CLEANING PERFORMED.

- 6. THE SEPARATORS SHALL BE INSPECTED A MINIMUM OF TWICE PER YEAR WITH ONE INSPECTION OCCURRING IN THE MONTH OF APRIL. A GRADUATED MEASURING DEVICE (STADIA ROD) SHOULD HAVE BEEN INSTALLED WITHIN THE SEPARATOR GRIT CHAMBER AND ANY DEBRIS. ACCUMULATED TO WITHIN ONE FOOT OF THE WATER SURFACE INSIDE THE GRIT CHAMBER PORTION OF THE TANK, WILL BE REMOVED BY VACUUM "VACTOR" TYPE OF EQUIPMENT AND PROPERLY DISPOSED OFF-SITE. ALSO, ANY FLOATING MATERIAL DISCOVERED DURING INSPECTIONS SHALL BE REMOVED FROM THE TANKS.
- 7. A DETAILED MAINTENANCE LOGBOOK SHALL BE KEPT ON-SITE FOR THE UNIT BY THE PROPERTY MANAGER. INFORMATION IS TO INCLUDE, BUT NOT BE LIMITED TO, THE DATE OF INSPECTION, RECORD OF GRIT DEPTH, CONDITION OF BAFFLES, OBSERVATION OF ANY FLOATABLE DEBRIS, AND DATE OF CLEANING PERFORMED
- BIORETENTION/INFILTRATION BASIN INSPECTION, MAINTENANCE & REPAIR

CLEAN-OUT SHOULD BE ACCOMPLISHED USING A JETVAC PROCESS.

- 1. INSPECT FILTER MEDIA FOR STANDING WATER OR OTHER EVIDENCE OF CLOGGING.
- 2. CHECK FOR SEDIMENT ACCUMULATION, TRASH AND DEBRIS IN BASIN.
- 3. REMOVE SEDIMENT GREATER THAN 1.5 INCHES DEEP ANNUALLY IN THE FILTER MEDIA BED.
- 4. REMOVE AND REPLACE TOP SEVERAL INCHES OF THE FILTER BED MATERIAL ANNUALLY. ADD MULCH AND/OR RE-MULCH VOID AREAS SEASONALLY OR AS NECESSARY
- 6. TREAT DISEASED TREES AND SHRUBS SEASONALLY OR AS NECESSARY
- 7. INSPECT SOIL AND REPAIR ERODED AREAS SEASONALLY OR AS NECESSARY. 8. REMOVE LITTER AND DEBRIS SEASONALLY OR AS NECESSARY.
- 9. PRUNE SHRUBS AS REQUIRED OR EVERY THREE YEARS TO REMOVE DEAD OR DYING VEGETATION AND/OR TO PREVENT OVERCROWDING.
- 10. REINFORCE PLANTINGS AND SEED AS NEEDED OR AFTER TWO YEARS TO MAINTAIN 80% COVERAGE FOR TURF AREAS AND 50% COVERAGE FOR SHRUB AREAS.
- 11. IF THERE IS STANDING WATER IN THE BIORETENTION AREA 48 HOURS AFTER A STORM EVENT, ROTOTILL OR CULTIVATE SURFACE OF FILTER MEDIA TO BREAK UP ANY HARD PACKED SEDIMENT AND

EROSION AND SEDMIENTATION (E&S) CONTROL PLAN:

- 1. THIS EROSION AND SEDIMENTATION CONTROL (E&S) PLAN IS FOR THE CONSTRUCTION OF THREE NEW APARTMENT BUILDINGS AND ASSOCIATED, ROADS, PARKING LOTS, UTILITIES AND STORMWATER
- 3. THE SITE EXHIBITS STEEP TOPOGRAPHY EXTENDING FROM THE NORTHEAST PORTION OF THE PROPERTY AREA WILL BE DISTURBED BY EARTHWORK ACTIVITIES AND THE INTENT OF THIS E & S PLAN IS TO ESTABLISH STORMWATER CONTROLS DURING CONSTRUCTION TO PREVENT THE DISCHARGE OF
- 4. SITE PLAN APPROVAL, AN INLAND WETLAND AND WATERCOURSES PERMIT AND PROJECT REGISTRATION UNDER THE CTDEEP GENERAL PERMIT FOR CONSTRUCTION AND DEWATERING WASTEWATERS IS REQUIRED PRIOR TO INITIATION OF CONSTRUCTION ACTIVITIES.
- COMPLETED IN THE SUMMER OF 2022.
- ROCK AND BOULDERS.
- EROSION CONTROL MEASURES INCLUDE
- CONSTRUCTION OF TEMPORARY SEDIMENT TRAPS AND BASINS.
- NEW STORM DRAIN SYSTEMS. • THE IMMEDIATE STABILIZATION OF FINAL GRADED AREAS THROUGH THE PLACEMENT OF RIPRAP,
- STEEPER. EROSION CONTROL BLANKET SHALL BE NORTH AMERICAN GREEN ROLLMAX BIONET 125 BN AS MANUFACTURED BY NORTHAMERICAN GREEN 4609 E EAST BOONVILLE- NEW HARMONY ROAD
- DEVELOPMENT OF A CONSTRUCTION OPERATIONS PLAN IN CONSIDERATION OF BASIC CONSTRUCTION
- 8. THE CONTRACTOR SHALL COORDINATE CONSTRUCTION WITH THE VILLAGE APARTMENT SITE MANAGER AS REQUIRED TO INFORM RESIDENTS OF SITE OPERATIONS. CONSTRUCTION SHALL BE CONDUCTED IN A MANNER THAT ALLOWS CONTINUED ACCESS TO EXISTING PARKING LOTS EXCEPT WHEN LOT MODIFICATIONS ARE IMPLEMENTED. THE CONSTRUCTION SEQUENCE PRESENTED HEREIN HAS BEEN PREPARED IN CONSIDERATION OF THIS REQUIREMENT.
- 9. PRIMARY CONSTRUCTION ACCESS TO THE SITE SHALL BE VIA THE NEW ROAD FROM JEROME AVENUE. SECONDARY ACCESS IS VIA AN EXISTING GRAVEL DRIVEWAY OFF OF ROUTE 32 AND THE MAIN
- PER THE PROJECT GEOTECHNICAL STUDY, LEDGE EXCAVATION WILL LIKELY BE REQUIRED FOR BUILDING "B" AND "C" FOUNDATIONS. LEDGE EXCAVATION LOCATIONS AND ELEVATIONS SHOWN ON THIS PLAN HAVE BEEN
- GENERAL E&S REQUIREMENTS 1. PRIOR TO THE START OF CONSTRUCTION THE CONTRACTOR SHALL MEET WITH THE TOWN REPRESENTATIVE TO DISCUSS E&S CONTROL REQUIREMENTS AND STORMWATER MANAGEMENT
 - STATE OF CONNECTICUT SOIL EROSION AND SEDIMENT CONTROL HANDBOOK. ALL MEASURES SHALL BE
- 3. THE OWNER OR AUTHORIZED REPRESENTATIVE SHALL BE RESPONSIBLE FOR IMPLEMENTING AND AND REOUIREMENTS OF THE PLAN. THE OWNER SHALL NOTIFY THE PROPER TOWN AGENCY OF ANY TRANSFER OF THIS RESPONSIBILITY AND SHALL ADVISE THE TOWN REGARDING THE NEED FOR IMPLEMENTING ADDITIONAL CONTROL MEASURES OR MAINTAINING EXISTING MEASURES AS DEEMED
- INITIATING EARTHWORK ACTIVITIES. 5. THE CONTRACTOR SHALL COMPLETE PERMANENT SEEDING BETWEEN APRIL 15TH THROUGH JUNE 15TH
- GRADED AREAS WITHIN 7 DAYS OF ESTABLISHING FINAL GRADE. 6. THE CONTRACTOR SHALL MAINTAIN EROSION CONTROLS AND REMOVE SEDIMENT FROM TRAPS AND BASINS THROUGHOUT CONSTRUCTION AS REQUIRED.
- SYSTEMS, WETLANDS AND WATERCOURSES. 2. THE E&S INTERIM GRADING PLAN DEPICTS APPROXIMATE EXCAVATION LIMITS AND RESULTING
- DRAINAGE PATTERNS UPON WHICH THE E&S MEASURES ARE PREDICATED. THE CONSTRACTOR SHALL DEVELOP A CONSTRUCTION EXCAVATION PLAN BASED ON THEIR OPERATIONAL REQUIREMENTS.
- WORK ZONE 2: BUILDINGS "A" & "B" PADS AND PARKING LOTS, NEW WESTERLY PARKING LOT AND THE PARKING LOT EAST OF BUILDING "2".

- MANAGEMENT FACILITIES AT THE VILLAGE APARTMENT COMPLEX ON JEROME ROAD IN MONTVILLE,
- 2. THE SITE AREA IS 12.02 ACRES (523,700 SF) AND THE NEW DEVELOPMENT ENCOMPASSES APPROXIMATELY 5.72 ACRES (249,163 SF) OF THE NORTH AND EAST PORTIONS OF THE SITE.
- DOWN TO GENTLY SLOPED TERRACES ALONG A WATERCOURSE AND ADJACENT WETLANDS. THIS ENTIRE

SEDIMENT LADEN RUNOFF FROM ENTERING STORM DRAIN SYSTEMS, WETLANDS AND WATERCOURSES

- 5. IT IS ANTICIPATED THAT SITE WORK CONSTRUCTION WILL BEGIN IN THE SUMER OF 2021 AND WILL BE
- 6. SURFICIAL GEOLOGY AT THE SITE CONSISTS OF CHARLTON-CHATFIELD FINE SANDY LOAM, GRAVEL
- THE INSTALLATION OF A SILT FENCE ALONG THE DOWN-GRADIENT LIMIT OF FILL AT THE SITE.
- TEMPORARY BY-PASS PUMPING OF STORM DRAIN DISCHARGES IF REQUIRED FOR THE INSTALLATION OF
- TOPSOIL, SEED, MULCH AND EROSION CONTROL NETTING. • THE USE OF EROSION CONTROL BLANKETS TO STABILIZE CUT AND FILL SLOPES GRADED AT 3H:1V OR
- ENTRANCE DRIVEWAY FROM JEROME ROAD. USE OF THE MAIN ENTRANCE SHALL BE MINIMIZED TO THE
- INTERPOLATED FROM THE GEOTECHNICAL REPORT.
- 2. E&S CONTROL MEASURES SHALL BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITION OF THE
- MAINTAINED AND UPGRADED TO ACHIEVE PROPER SEDIMENT CONTROL DURING CONSTRUCTION. INSPECTING E&S MEASURES PER THIS PLAN AND SHALL INFORM ALL CONTRACTORS OF THE OBJECTIVES NECESSARY DURING CONSTRUCTION. WEEKLY INSPECTIONS SHALL BE CONDUCTED AND/OR WITHIN 24 HOURS OF THE END OF A STORM HAVING A RAINFALL AMOUNT OF 0.25 INCHES OR GREATER. MONTHLY WRITTEN REPORTS SHALL BE PREPARED INFORMING THE TOWN OF OBSERVATIONS, MAINTENANCE, AND
- 4. THE CONTRACTOR SHALL INSTALL SILT FENCE AS SHOWN ON THE E&S CONTROL PLAN PRIOR TO
- AND AUGUST 15TH THROUGH OCTOBER 1ST. APPLY PERMANENT SOIL STABILIZATION MEASURES TO ALL
- 1. THE INTENT OF THIS E & S PLAN IS TO ESTABLISH STORMWATER CONTROLS DURING EARTHWORK ACTIVITIES TO PREVENT THE DISCHARGE OF SEDIMENT LADEN RUNOFF FROM ENTERING STORM DRAIN
- 3. THIS CONSTRUCTION SEQUENCE ESTABLISHES TWO WORK ZONES AS FOLLOWS WORK ZONE 1: AREA ENCOMPASSING NEW ROAD FROM JEROME AVENUE, BUILDING "C" PAD, SOUTH EASTERLY PARKING LOTS AND TEMPORARY CONSTRUCTION ACCESS TO BUILDING "A" & "B" BUILDING
- 4. COORDINATED CONCURRENT WORK MAY BE UNDERTAKEN IN EACH ZONE WITH INTERCONNECTIONS COMPLETED PER THE CONTRACTOR'S SCHEDULE.

WORK ZONE 1 1. CLEAR TREES AND BRUSH.

7. STRIP AND STOCKPILE TOPSOIL

- 2. STRIP AND STOCKPILE TOPSOIL FROM NEW ACCESS ROAD, ROUGH-IN ROAD AND PLACE GRAVEL
- BASE AND TEMPORARY CONSTRUCTION ENTRANCE.
- 3. ESTABLISH TEMPORARY OFFICE TRAILER AND CONSTRUCTION STAGING AREA.
- 4. INSTALL TEMPORARY SILT FENCE ALONG THE WEST AND SOUTH PROPERTY LINE AND NORTH SIDE OF EXISTING ROAD TO THE BUILDING "2" EAST PARKING LOT.
- 5. INSTALL TEMPORARY 15" HDPE RISER AND PERMANENT 12" HDPE OUTLET PIPE WITH CONNECTION TO EXISTING CATCH BASIN IN JEROME AVENUE.
- 6. INSTALL TEMPORARY SEDIMENT BASINS NO. 1 & 2 WITH TEMPORARY OUTLET RISERS AND PIPES.
- 8. BEGIN EARTHWORK TO PREPARE THE BUILDING "C" PAD AND TEMPORARY ACCESS ROAD TO BUILDING "A" AND "B". STOCKPILE SOIL & ROCK AS REQUIRED.
- 9. INSTALL TEMPORARY SEDIMENT TRAP #1 AND TEMPORARY ACCESS ROAD SWALE AND GRADE DISTURBED AREAS TO DRAIN TO SEDIMENT TRAPS AND BASINS.

11. CONSTRUCT RETAINING WALL EXTENDING FROM BUILDING "B" FOUNDATION EAST INTO WORK

- 10. DO NOT DISTURB THE BUILDING "2" EAST PARKING LOT.
- 12. CONSTRUCT BUILDING "C" FOUNDATION.

7. CONSTRUCT BUILDING "B" FOUNDATION.

13. INSTALL YD1, DMH1 AND 12" HDPE PIPE. 14. BACKFILL BETWEEN BUILDING "C" FOUNDATION AND ADJACENT RETAINING WALL PER GRADING

- CLEAR TREES AND BRUSH.
- 2. INSTALL TEMPORARY SILT FENCE ALONG THE EASTERLY CLEARING LIMIT. 3. INSTALL TEMPORARY SEDIMENT/DEWATERING BASIN WITH FILTER BERM AND HAYBALE CHECK
- 4. STRIP AND STOCKPILE TOPSOIL AND BEGIN EARTHWORK TO PREPARE BUILDING "A" & "B" PADS. STOCKPILE SOIL & ROCK AS REQUIRED
- 6. INSTALL TEMPORARY DIVERSION SWALE AND PIPE AND GRADE DISTURBED AREA TO DRAIN TO THE SWALE AND SEDIMENT/DEWATERING BASIN #3.
- 8. BACKFILL BUILDING "B" FOUNDATION AND CONSTRUCT SLOPE NORTH OF BUILDING PER GRADING PLAN. IMMEDIATELY PLACE TOPSOIL, SEED AND EROSION CONTROL BLANKET

9. PLACE FILL FOR BUILDING "A" AND CONSTRUCT FOUNDATION. IMMEDIATELY PLACE RIPRAP,

- TOPSOIL, SEED AND EROSION CONTROL BLANKET ON EMBANKMENT SLOPES. 10. MODIFY SEDIMENT TRAP #1 AND INSTALL CB13 & OUTLET 3.
- WEST PARKING LOT WITH PIPE CONNECTION TO CB13. 12. INSTALL NEW 15" HDPE PIPE FROM EXISTING STORM MANHOLE TO OSC8 AND BY-PASS PUMP

11. INSTALL CB12, CDS6, OSC8 AND UNDERGROUND DETENTION/INFILTRATION SYSTEM #3 IN NEW

STORM DRAIN DISCHARGES IF REQUIRED DURING CUT-OVER. 13. INSTALL CB10 AND NEW 12" HDPE PIPE CONNECTION TO CDS6

WORK ZONE 1 & 2 COORDINATED WORK 1. CONSTRUCT AND BACKFILL RETAINING WALL EAST OF BUILDING "C".

- 2. CONSTRUCT NEW WESTERLY PARKING LOT PRIOR TO REMOVAL OF THE BUILDING "2" EAST
- RELOCATE TEMPORARY OFFICE TRAILER AND CONSTRUCT BIORETERNTION BASIN FOR USE AS TEMPORARY SEDIMENT BASIN. 4. CONSTRUCT SWALE EAST OF NEW ACCESS ROAD AND INSTALL YD2, CB13, CDS2 AND OUTLET 2.
- 5. ESTABLISH SUBGRADE ELEVATIONS FOR ROADS AND PARKING LOTS. 6. INSTALL STORM DRAINAGE AND UNDERGROUND DETENTION/INFILTRATION SYSTEMS #1 & #2
- 7. INSTALL UTILITIES. 8. INSTALL ROAD AND PARKING AREA BASE MATERIALS AND PAVEMENT.

THE GRADING

AND INSTALL SILT SACK OR FILTER FABRIC IN CATCH BASINS.

- CONSTRUCT SIDEWALKS. 10. REMOVE BERM AT TEMPORARY SEDIMENT/DEWATERING BASIN #3 AND STABILIZE THE AREA PER
- 11. FINAL GRADE LANDSCAPE AREAS AND PLACE TOPSOIL SEED, MULCH AND LANDSCAPING. SEE LANDSCAPE PLANS FOR SEEDING SCHEDULE.

12. REMOVE ANY ACCUMULATED SEDIMENT IN BIORETETNION BASIN, SCARIFY BOTTOM OF BASIN

- 13. UPON STABILIZATION OF SITE CLEAN ALL CDS UNITS, AND REMOVE ALL TEMPORARY E&S
- A. INSPECT HAY BALE BARRIERS/GEOTEXTILE SILT FENCE AT LEAST ONCE A WEEK AND WITHIN 24 HOURS AFTER THE END OF A STORM WITH A RAINFALL AMOUNT OF 0.25 INCHES OR
- B. REMOVE SEDIMENT DEPOSITS OR INSTALL A SECONDARY BARRIER/FENCE WHEN SEDIMENT DEPOSITS REACH APPROXIMATELY ONE HALF HEIGHT OF THE BARRIER/FENCE.
- C. REPLACE OR REMOVE THE BARRIER/FENCE WITHIN 24 HOURS OF OBSERVED FAILURE. IF REPETITIVE FAILURE OCCURS, CONSULT 2002 GUIDELINES FOR TROUBLESHOOTING
- D. MAINTAIN THE HAY BARRIER/SILT FENCE UNTIL THE CONTRIBUTING AREA IS STABILIZED.

AND PLACE SOIL MIX AND PLANTINGS.

1. HAYBALE BARRIERS/GEOTEXTILE SILT FENCES:

GREATER TO DETERMINE MAINTENANCE NEEDS

MAINTENANCE OF EROSION CONTROL DEVICES

- OTHERWISE REQUIRED, HAY BALES MAY BE LEFT IN PLACE OR BROKEN UP FOR GROUND COVER. IF ACCUMULATED SEDIMENT EXCEEDS 6 INCHES, REGRADE OR REMOVE SEDIMENT
- 2. CONSTRUCTION ENTRANCES AND ROADWAYS: A. MAINTAIN THE ENTRANCE IN A CONDITION WHICH WILL PREVENT TRACKING AND WASHING OF SEDIMENT ONTO PAVED SURFACES.

B. PROVIDE PERIODIC TOP DRESSING AND ADDITIONAL STONE OR LENGTH AS NECESSARY.

E. AFTER UPSLOPE AREAS HAVE BEEN PERMANENTLY STABILIZED, REMOVE STAKES FROM HAY

BALES: PULL UP FENCE SUPPORT POSTS AND CUT OFF GEOTEXTILE AT GROUND. UNLESS

- C. IMMEDIATELY REMOVE ALL SEDIMENT SPILLED, DROPPED, WASHED OR TRACKED ONTO
- PAVED SURFACES. ROADS ADJACENT TO THE CONSTRUCTION SITE SHALL BE LEFT CLEAN

FILTRATION PERFORMANCE SHOULD BE OBSERVED.

3. TEMPORARY SEDIMENT TRAPS: A. INSPECTIONS SHALL BE AT SAME INTERVALS AS ABOVE B. OUTLET SHALL BE CHECKED FOR INTEGRITY: HEIGHT OF THE STONE OUTLET SHALL BE

MAINTAINED AT ONE FOOT BELOW CREST OF EMBANKMENT, SEDIMENT ACCUMULATION AND

C. WHEN SEDIMENTS HAVE ACCUMULATED TO ONE HALF OF THE MINIMUM REQUIRED STORAGE VOLUME, DEWATER TRAP, REMOVE SEDIMENTS, RESTORE TRAP TO ORIGINAL DIMENSIONS

AND DISPOSE OF SEDIMENT AT A LOCATION AND MANNER THAT WILL NOT RESULT IN

CONSTRUCTION ACTIVITIES, INSPECT AT THE END OF EACH DAY AND IMMEDIATELY REPAIR

D. AFTER CONTRIBUTING AREA IS STABILIZED, REMOVE TRAP AND REGRADE AND STABILIZE

AREA FOR INTENDED USE AS SHOWN ON PLANS. 4. TEMPORARY DIVERSION DITCHES: A. WHEN THE TEMPORARY DIVERSION IS LOCATED IN CLOSE PROXIMITY TO ONGOING

DAMAGES. OTHERWISE, INSPECT ON SAME INTERVAL AS ABOVE.

B. REPAIR THE DIVERSION WITHIN 24 HOURS OF ANY OBSERVED FAILURE. FAILURE HAS OCCURRED WHEN THE DIVERSION HAS BEEN DAMAGED. SUCH THAT IT NO LONGER MEETS THE SPECIFICATIONS IN THE 2002 GUIDELINES.

C. IF REPETITIVE FAILURES OCCUR, REVIEW CONDITIONS AND DETERMINE IF ADDITIONAL MEASURES OR AN ALTERNATIVE MEASURE IS NECESSARY.

BASIS OF DESIGN- TEMPORARY SEDIMENT BASINS AND TRAPS

EROSIONS OR SEDIMENTATION.

- TEMPORARY SEDIMENT BASIN 1 & 2: DRAINAGE AREA = 1.95 AC
- VOLUME PROVIDED = 262 CY 2. TEMPORARY SEDIMENT TRAP: DRAINAGE AREA = 0.89 AC

REQUIRED VOLUME = 134 CY/AC X 1.95 ACRES = 262 CY

REQUIRED VOLUME = $134 \text{ CY/AC} \times 0.899 \text{ ACRES} = 118 \text{ CY}$

REQUIRED VOLUME = 134 CY/AC X 2.51 ACRES = 337 CY

VOLUME PROVIDED = 156 CY 3. TEMPORARY SEDIMENT/DEWATERING BASIN 3:

DRAINAGE AREA = 2.51 AC

VOLUME PROVIDED = 471 CY

ZONE DISTRICT R-20-M (RESIDENTIAL MULTIFAMILY) & ROUTE 32 OVERLAY ZONE (OZ) REQUIRED/ALLOWED PROVIDED 523,700 SF 20,000 SF MINIMUM LOT AREA MINIMUM LOT FRONTAGE 80 FT 175± FT 51 FT / 92 FT MINIMUM FRONT YARD 50 FT MINIMUM SIDE YARD 15 FT N/A MINIMUM REAR YARD 30 FT 175 FT 54.8 FT (SEE SITE NOTE 6) 60 FT MAX BUILDING HEIGHT 1 UNIT PER 2,420 SF **DWELLING UNIT DENSIT** (SEE SITE NOTE 5) (SEE SITE NOTE 5) PARKING SPACES (SEE SITE NOTE 8) (SEE SITE NOTE 8)

ZONING DATA TABLE

SOIL TEST DATA

WATER SUPPLY/SANITARY

SEWER

A. A GEOTECHNICAL STUDY FOR THE PHASE III VILLAGE APARTMENTS HAS BEEN COMPLETED INCLUDING SOIL BORINGS AND TEST PITS. TEST PIT LOCATIONS ARE PROVIDED ON SHEET 3- SURVEY AND EXISTING CONDITIONS PLAN AND TEST PIT LOGS ARE PROVIDED IN THE GEOTECHNICAL STUDY PREPARED BY WELTI

MUNICIPAL

GEOTECHNICAL, PC DATED OCTOBER 26, 2020. B. ADDITIONAL TEST PITS WERE COMPLETED BY LOUREIRO ENGINEERING ASSOCIATES

ON DECEMBER 3, 2020 AND TEST PIT LOGS FOLLOW:

· · · · · · · · · · · · · · · · · · ·		2071	
0 - 12"	TOPSOIL	0 - 8"	TOPSOIL
12" - 24" SAND	LIGHT BROWN SILTY FINE	8" - 24"	LT BROWN SILTY FINE SAND
24" - 138" BROWN/RED/G COBBLE	BANDED REY SAND, GRAVEL &	24" - 72"	GREY MEDIUM TO COARSE SAND, GRAVEL, ROCK & BOULDERS
NO MOTTLING		NO MOTTLING	
WATER AT 138'	,	NO WATER	
NO LEDGE		LEDGE @ 72"	
<u>TH- 6A</u>		<u>TH- 13B</u>	
0 - 8"	TOPSOIL	0 - 8"	TOPSOIL
8" - 14"	LIGHT BROWN SILTY FINE SAND	6" - 60" SAND	LT BROWN SILTY FINE
14" - 48"	GREY SILT LENSE	60" - 126"	GREY FINE TO MEDIUM
48″- 78″	GREY MEDIUM TO COARSE		SAND & TRACE GRAVEL
	SAND & GRAVEL	NO MOTTLING	
78″- 126″	GREY FINE TO MEDIUM SAND	NO WATER	
NO MOTTLING		TH- 18A	
NO WATER		0 - 3"	TOPSOIL
BOULDERS AT 126"		3" - 126"	LT BROWN SILTY FINE TO COARSE SAND, GRAVEL,
<u>TH- 6B</u>		NO MOTTLING	COBBLES & ROCK
0 - 12"	TOPSOIL	NO MOTTLING NO WATER	
12" - 24"	LIGHT BROWN/GREY SILTY	BOULDERS AT :	126"
24" 120"	FINE SAND	DOULDERS AT .	126
24" - 138"	BANDED BROWN/RED/GREY	TU 10D	
	MEDIUM- COARSE SAND,	<u>TH- 18B</u> 0 - 3"	TOPSOIL
	GRAVEL & COBBLE	0 - 3 3" - 40"	LIGHT BROWN SILTY FINE
NO MOTTLING			SAND & GRAVEL- FILL
NO WATER NO LEDGE		40" - 72"	LIGHT BROWN SILTY FINE SAND
		72" - 156"	BROWN MEDIUM TO COARSE SAND, GRAVEL & COBBLE
		NO MOTTLING	

LEGEND

WATER AT 150'

NO LEDGE

ACRES MONITORING WELL BORING NOW OR FORMERLY BITUMINOUS OVERHEAD UTILITIES CATCH BASIN OUTLET CONTROL STRUCTURE OCS CLEAN OUT RETAINING CONCRETE STORM DRAIN MANHOLE SQUARE FEET DOMESTIC WATER SERVICE SANITARY MANHOLE TRANSFORMER ELEC HH ELECTRIC HANDHOLE TO BE REMOVED FLARED END TO BE RELOCATED FINISHED FLOOR TO BE REMOVED AND REPLACED FIRE PROTECTION TOP OF FRAME GAS VALVE TO REMAIN HANDICAR TYPICAL FIRE HYDRAN UNDERGROUND UTILITIES INVERT UNDERDRAIN

MANHOLE TEST PIT BUILDING SETBACK LINE GAS — G— ELECTRICAL MUNICIPAL WATER

SANITARY SEWER

NEW PARKING SPACE

DECIDUOUS TREE

CONIFEROUS TREE

LIGHT POLE

MORE OR LESS

OUTLET CONTROL STRUCTURE

— — — NEW DRAINAGE PIPE

NEW CATCH BASIN SPOT ELEVATION ----- 64 ----- NEW CONTOUR —— 57 —— EXISTING CONTOUR SOIL TYPE

WATER VALVE

YARD DRAIN

CROSS SECTION

NEW MANHOLE

WF1 AND NUMBER

INLAND WETLAND FLAG

———— SOIL TYPE LIMIT STONE WALL FLOOD ZONE BOUNDARY

ZONE BOUNDARY

0

• 🖂

L9000079.03

