



70 Essex Street, Unit 2C, Street, Mystic, CT 06355 ■ Phone: 860-536-7390

October 6, 2022

Montville Inland Wetlands Commission

Re: Stormwater Summary
2040 New London Turnpike, Montville, CT
Fedus Engineering, LLC Job # 001048

We offer the following summary of our stormwater analysis:

	2 year	10 year	25 year	50 year	100 year
Existing Rate	0.71 CFS	2.61 CFS	4.46 CFS	6.38 CFS	8.82 CFS
Proposed Rate	0.48 CFS	1.78 CFS	3.05 CFS	4.39 CFS	6.11 CFS
Existing Volume	0.107 af	0.292 af	0.470 af	0.653 af	0.887 af
Proposed Volume	0.069 af	0.186 af	0.301 af	0.421 af	0.577 af

Water Quality Volume – Volume of runoff generated by one inch of rainfall on the site

$$WQV = (1'')(R)(A)/12$$

$$R = 0.05 + 0.009 * I = 0.05 + 0.009(31.6) = 0.3344, \text{ I} = \text{Impervious Coverage} = 31.6\%,$$

$$A = 2.66 \text{ Acres}$$

$$WQV = 1''(0.3344)(2.66)/12 = 0.0741 \text{ acre-ft. } * (43,560 \text{ SF/1Acre}) = 3229 \text{ Cubic Feet}$$

The forebay area of the detention basin and the hydro-dynamic separator will ensure the TSS removal of 80% plus. The hydro-dynamic separator is sized to handle the majority of the parking and site prior to discharging to the forebay of the detention basin.

Conclusions:

The post development flows and volumes are lower than pre-development conditions in all storms. There will be no adverse impact to the down-gradient wetlands. Additionally, it is our professional opinion that there will be no adverse impact to the adjacent downstream properties.

If you have any questions or require additional information please contact our office at (860) 536-7390.

Sincerely,

A blue ink signature of Gregg Fedus, P.E., written over a horizontal line.

Gregg Fedus, P.E.







Ex. Area 1



Proposed Area 1, 2, and
3



Proposed Area 4



Detention Basin



Analysis 1



Routing Diagram for 2040 NL Turnpike Montville Existing and Proposed Stormwater Analysis - Second

Prepared by Microsoft, Printed 10/6/2022

HydroCAD® 10.00-20 s/n 05120 © 2017 HydroCAD Software Solutions LLC

Summary for Subcatchment 1 - EX: Ex. Area 1


Runoff = 0.71 cfs @ 12.34 hrs, Volume= 0.107 af, Depth= 0.48"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 2-Year Rainfall=3.39"

Area (sf)	CN	Description
115,773	60	Woods, Fair, HSG B
115,773		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.4	100	0.0900	0.15		Sheet Flow, Wooded
					Woods: Light underbrush n= 0.400 P2= 3.39"
6.0	460	0.0643	1.27		Shallow Concentrated Flow, Balance of Flow
					Woodland Kv= 5.0 fps
17.4	560	Total			

Subcatchment 1 - EX: Ex. Area 1

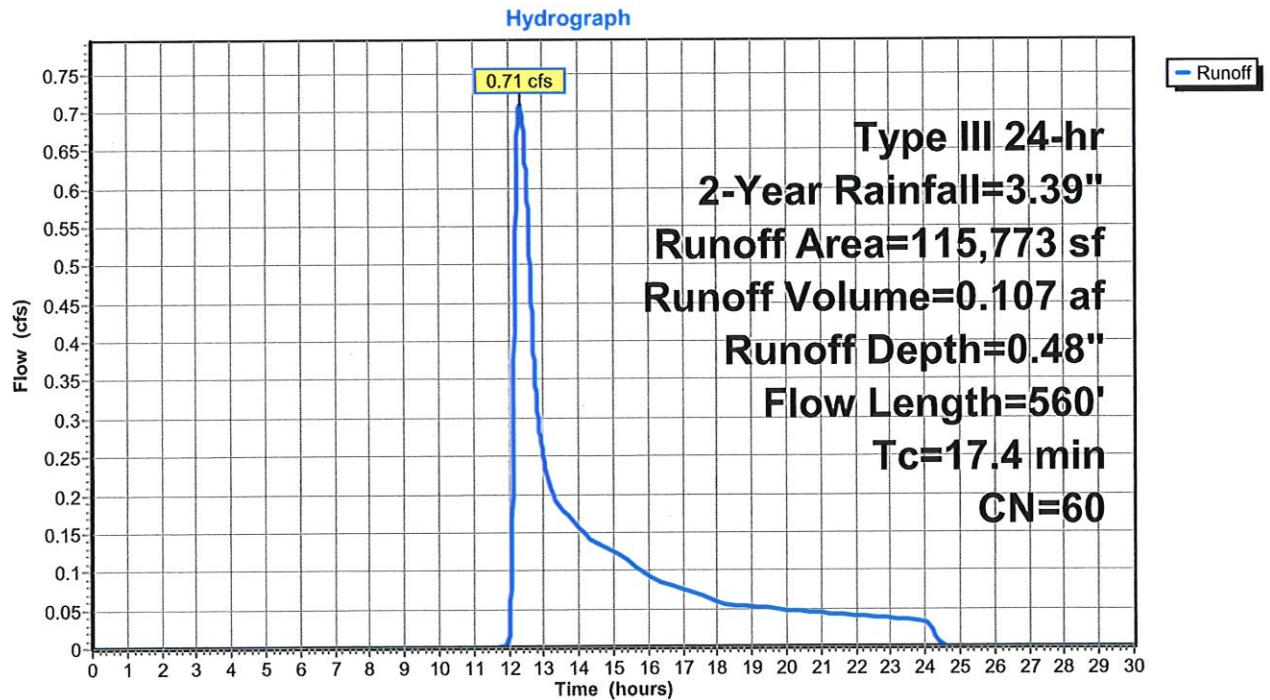

Summary for Subcatchment 1 - P: Proposed Area 1, 2, and 3


Runoff = 2.30 cfs @ 12.17 hrs, Volume= 0.211 af, Depth= 2.63"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 2-Year Rainfall=3.39"

Area (sf)	CN	Description
5,376	60	Woods, Fair, HSG B
28,855	98	Paved parking, HSG B
7,696	98	Roofs, HSG B
41,927	93	Weighted Average
5,376		12.82% Pervious Area
36,551		87.18% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.7	100	0.0900	0.14		Sheet Flow, Grass Grass: Bermuda n= 0.410 P2= 3.39"
0.5	38	0.0286	1.18		Shallow Concentrated Flow, Flow to Pavement Short Grass Pasture Kv= 7.0 fps
0.5	132	0.0423	4.18		Shallow Concentrated Flow, Balance of Flow Path to CB 2 Paved Kv= 20.3 fps
0.3	160	0.0300	9.12	11.19	Pipe Channel, HDPE_Round 15" 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.013 Corrugated PE, smooth interior
13.0	430	Total			

Subcatchment 1 - P: Proposed Area 1, 2, and 3

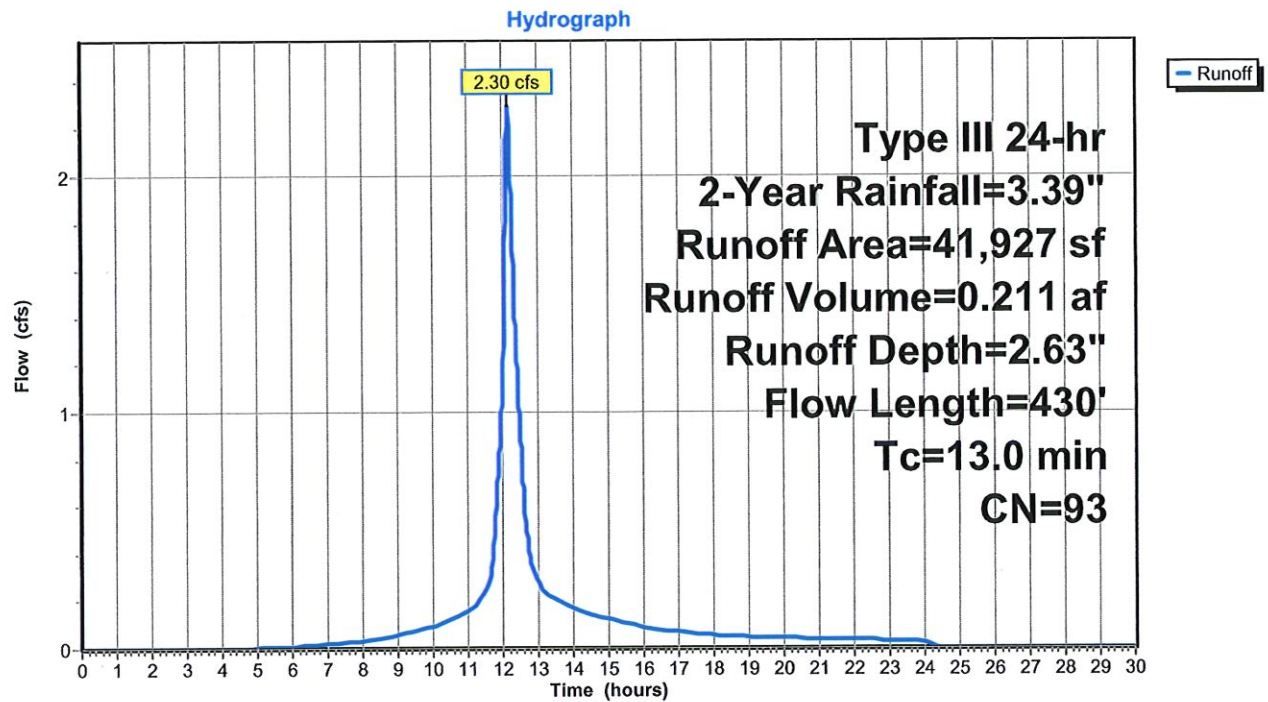

Summary for Subcatchment 4 - P: Proposed Area 4


Runoff = 0.48 cfs @ 12.28 hrs, Volume= 0.069 af, Depth= 0.48"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 2-Year Rainfall=3.39"

Area (sf)	CN	Description
73,846	60	Woods, Fair, HSG B
73,846		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.6	100	0.0700	0.13		Sheet Flow, Existing Wooded Area Woods: Light underbrush n= 0.400 P2= 3.39"
1.6	130	0.0692	1.32		Shallow Concentrated Flow, Concentrated to Channel Woodland Kv= 5.0 fps
0.4	160	0.0825	6.51	26.06	Channel Flow, Balance of Flow to Analysis Point Area= 4.0 sf Perim= 6.0' r= 0.67' n= 0.050 Mountain streams w/large boulders
14.6	390	Total			

Subcatchment 4 - P: Proposed Area 4

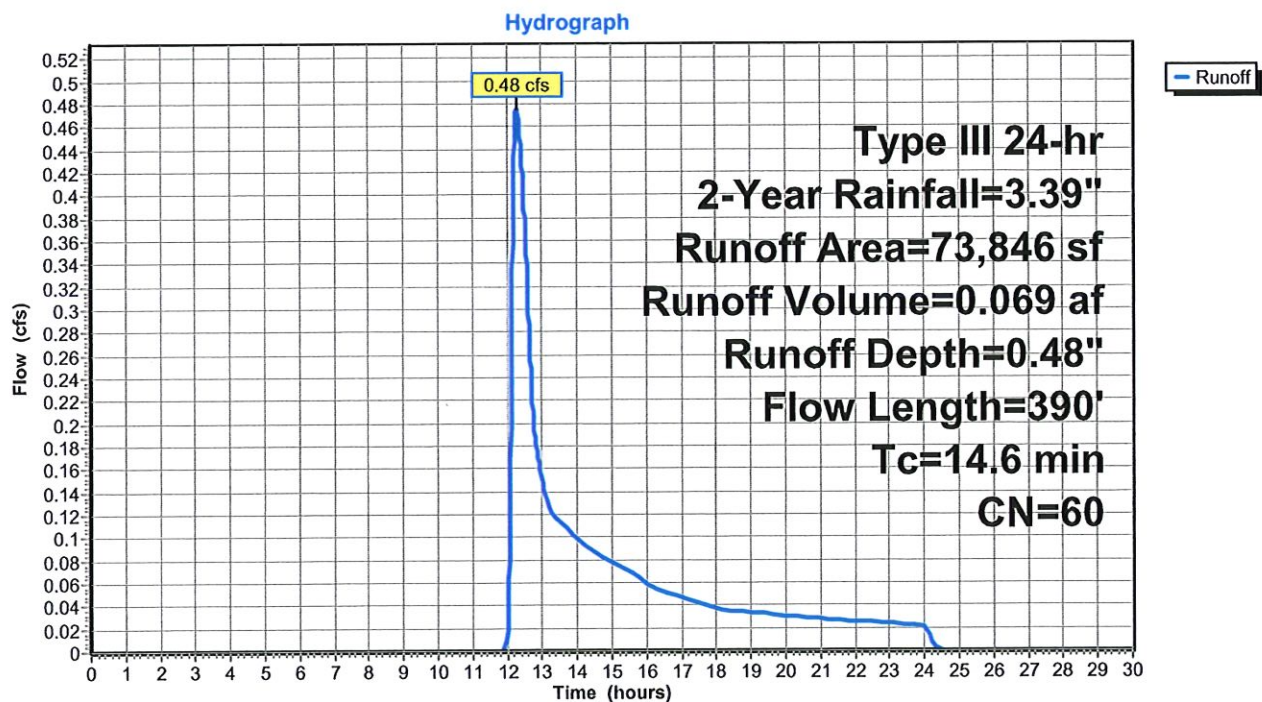

Summary for Pond P - 3: Detention Basin

Inflow Area = 0.963 ac, 87.18% Impervious, Inflow Depth = 2.63" for 2-Year event
 Inflow = 2.30 cfs @ 12.17 hrs, Volume= 0.211 af
 Outflow = 2.21 cfs @ 12.21 hrs, Volume= 0.211 af, Atten= 4%, Lag= 2.1 min
 Discarded = 2.21 cfs @ 12.21 hrs, Volume= 0.211 af
 Primary = 0.00 cfs @ 0.00 hrs, Volume= 0.000 af

Routing by Stor-Ind method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Peak Elev= 158.05' @ 12.21 hrs Surf.Area= 5,372 sf Storage= 292 cf

Plug-Flow detention time= 2.2 min calculated for 0.211 af (100% of inflow)
 Center-of-Mass det. time= 2.2 min (799.4 - 797.2)


Volume	Invert	Avail.Storage	Storage Description
#1	158.00'	29,546 cf	Custom Stage Data (Prismatic) Listed below (Recalc)
Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
158.00	5,372	0	0
159.00	5,372	5,372	5,372
160.00	5,372	5,372	10,744
161.00	5,372	5,372	16,116
162.00	5,372	5,372	21,488
163.00	5,372	5,372	26,860
163.50	5,372	2,686	29,546

Device	Routing	Invert	Outlet Devices
#1	Primary	158.25'	3.0" Vert. Orifice/Grate C= 0.600
#2	Primary	161.00'	4.0" Vert. Orifice/Grate C= 0.600
#3	Primary	163.50'	24.0" x 36.0" Horiz. Orifice/Grate C= 0.600 Limited to weir flow at low heads
#4	Discarded	158.00'	18.000 in/hr Exfiltration over Surface area

Discarded OutFlow Max=2.24 cfs @ 12.21 hrs HW=158.05' (Free Discharge)
 ↳4=Exfiltration (Exfiltration Controls 2.24 cfs)

Primary OutFlow Max=0.00 cfs @ 0.00 hrs HW=158.00' (Free Discharge)
 ↳1=Orifice/Grate (Controls 0.00 cfs)
 ↳2=Orifice/Grate (Controls 0.00 cfs)
 ↳3=Orifice/Grate (Controls 0.00 cfs)

Pond P - 3: Detention Basin

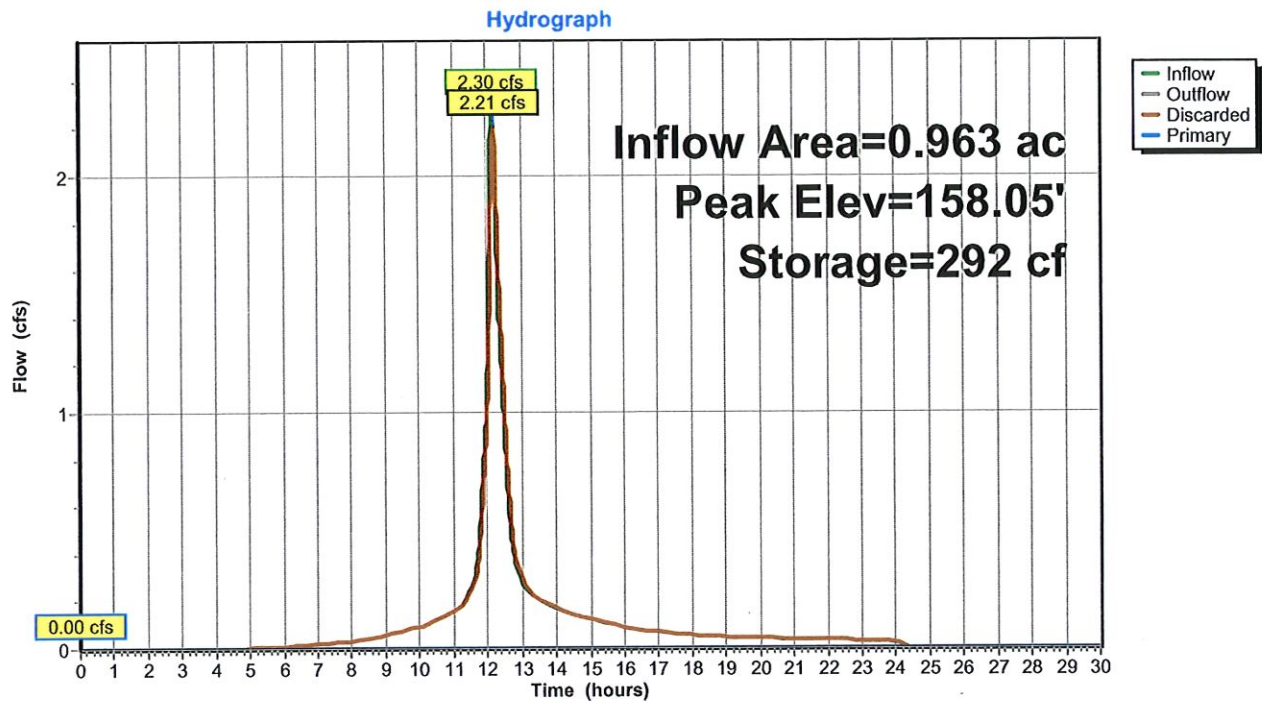


Summary for Link Analysis 1: Analysis 1

Inflow Area = 2.658 ac, 31.57% Impervious, Inflow Depth = 0.31" for 2-Year event
Inflow = 0.48 cfs @ 12.28 hrs, Volume= 0.069 af
Primary = 0.48 cfs @ 12.28 hrs, Volume= 0.069 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs

Link Analysis 1: Analysis 1

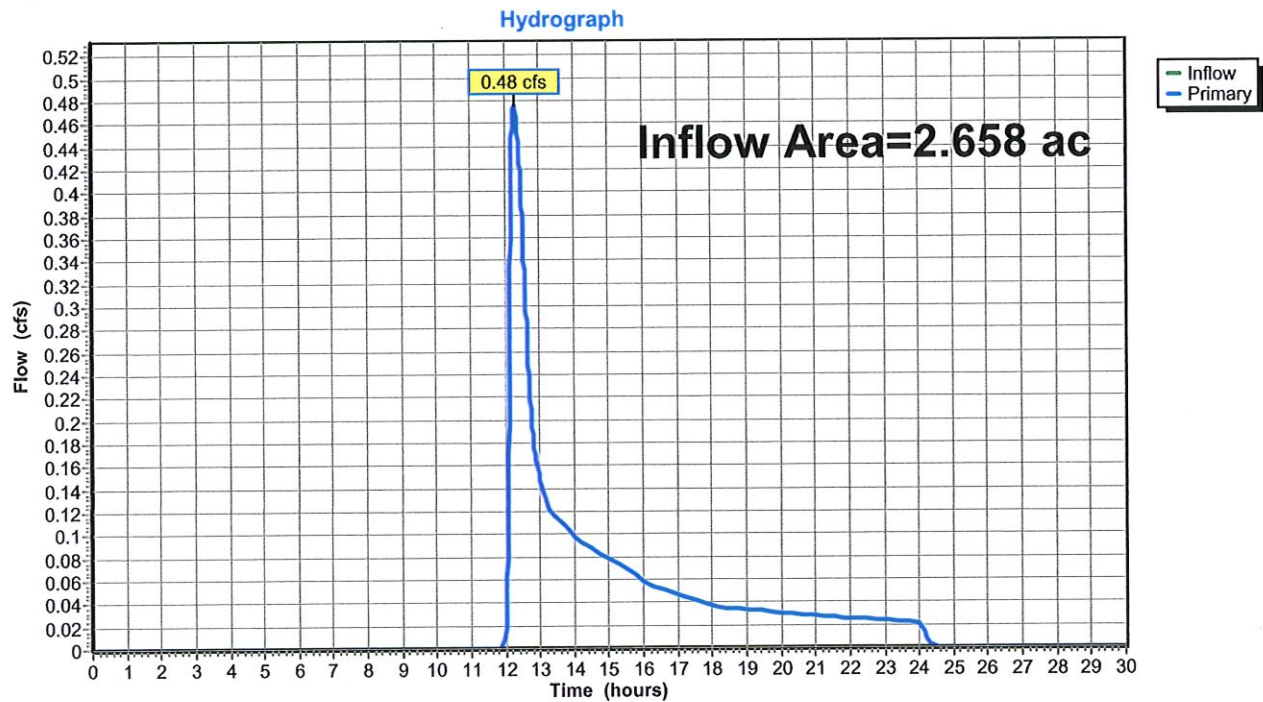

Summary for Subcatchment 1 - EX: Ex. Area 1


Runoff = 2.61 cfs @ 12.27 hrs, Volume= 0.292 af, Depth= 1.32"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 10-Year Rainfall=5.03"

Area (sf)	CN	Description
115,773	60	Woods, Fair, HSG B
115,773		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.4	100	0.0900	0.15		Sheet Flow, Wooded Woods: Light underbrush n= 0.400 P2= 3.39"
6.0	460	0.0643	1.27		Shallow Concentrated Flow, Balance of Flow Woodland Kv= 5.0 fps
17.4	560	Total			

Subcatchment 1 - EX: Ex. Area 1

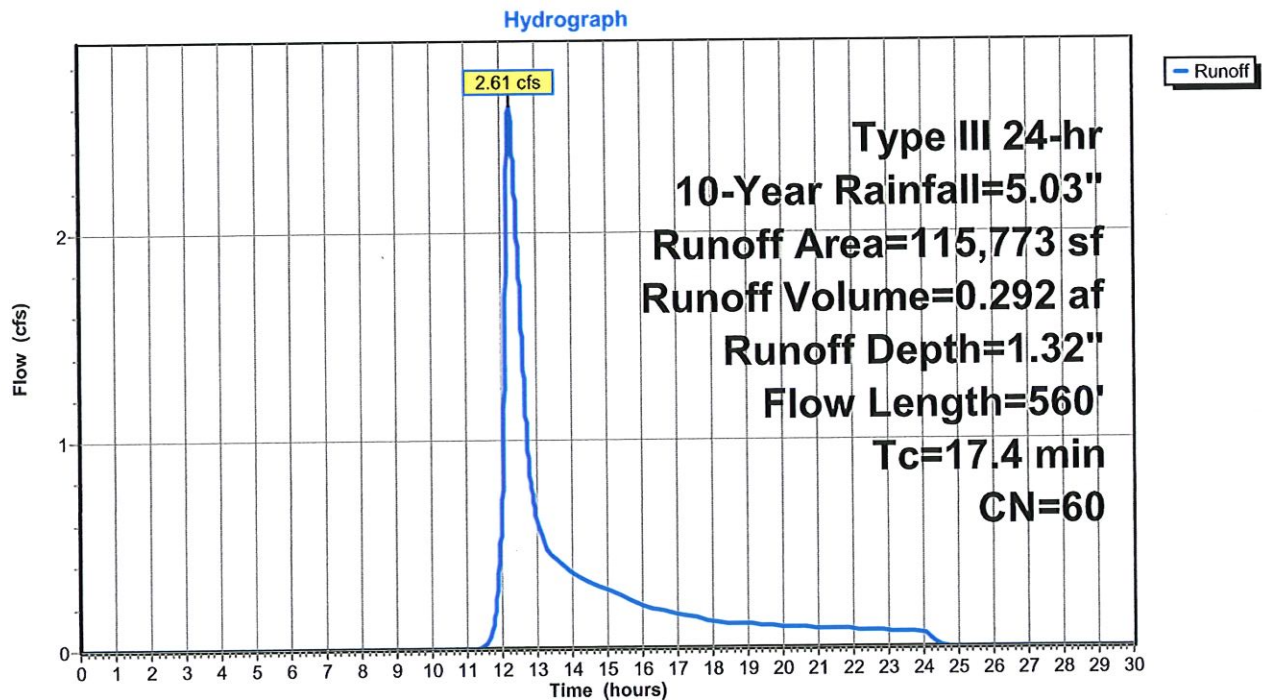

Summary for Subcatchment 1 - P: Proposed Area 1, 2, and 3


Runoff = 3.60 cfs @ 12.17 hrs, Volume= 0.339 af, Depth= 4.23"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 10-Year Rainfall=5.03"

Area (sf)	CN	Description
5,376	60	Woods, Fair, HSG B
28,855	98	Paved parking, HSG B
7,696	98	Roofs, HSG B
41,927	93	Weighted Average
5,376		12.82% Pervious Area
36,551		87.18% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.7	100	0.0900	0.14		Sheet Flow, Grass Grass: Bermuda n= 0.410 P2= 3.39"
0.5	38	0.0286	1.18		Shallow Concentrated Flow, Flow to Pavement Short Grass Pasture Kv= 7.0 fps
0.5	132	0.0423	4.18		Shallow Concentrated Flow, Balance of Flow Path to CB 2 Paved Kv= 20.3 fps
0.3	160	0.0300	9.12	11.19	Pipe Channel, HDPE_Round 15" 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.013 Corrugated PE, smooth interior
13.0	430	Total			

Subcatchment 1 - P: Proposed Area 1, 2, and 3

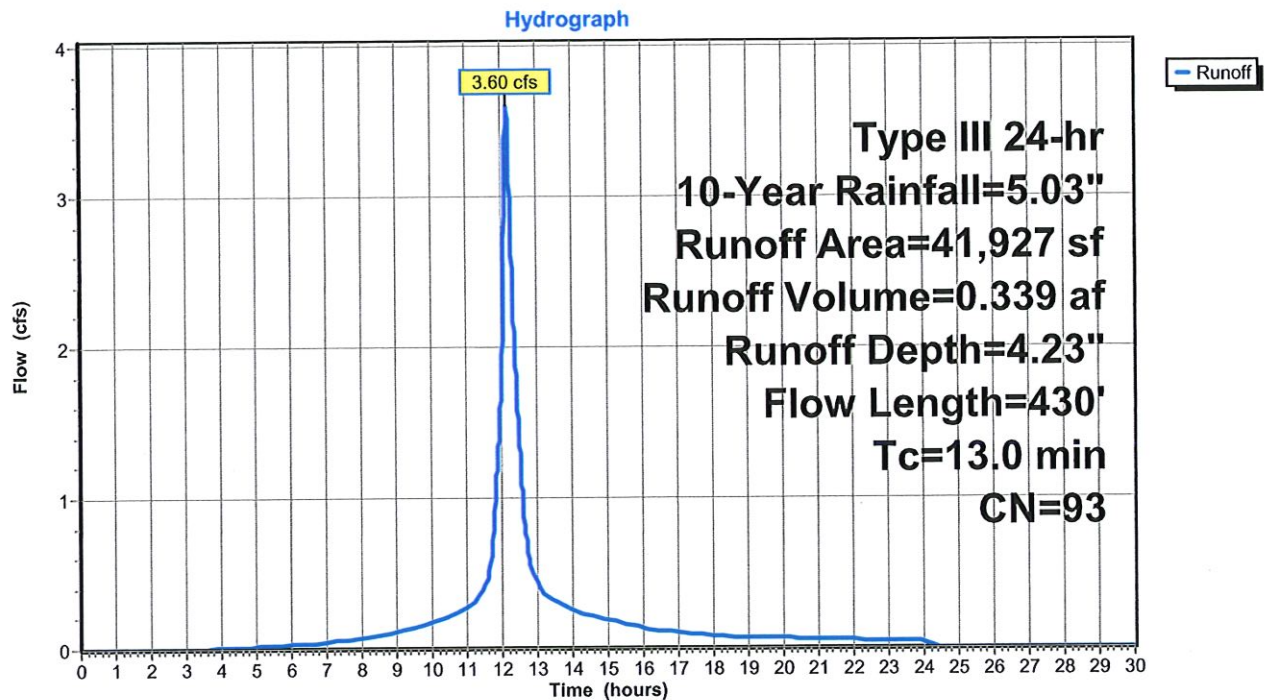

Summary for Subcatchment 4 - P: Proposed Area 4


Runoff = 1.78 cfs @ 12.22 hrs, Volume= 0.186 af, Depth= 1.32"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 10-Year Rainfall=5.03"

Area (sf)	CN	Description
73,846	60	Woods, Fair, HSG B
73,846		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.6	100	0.0700	0.13		Sheet Flow, Existing Wooded Area Woods: Light underbrush n= 0.400 P2= 3.39"
1.6	130	0.0692	1.32		Shallow Concentrated Flow, Concentrated to Channel Woodland Kv= 5.0 fps
0.4	160	0.0825	6.51	26.06	Channel Flow, Balance of Flow to Analysis Point Area= 4.0 sf Perim= 6.0' r= 0.67' n= 0.050 Mountain streams w/large boulders
14.6	390	Total			

Subcatchment 4 - P: Proposed Area 4

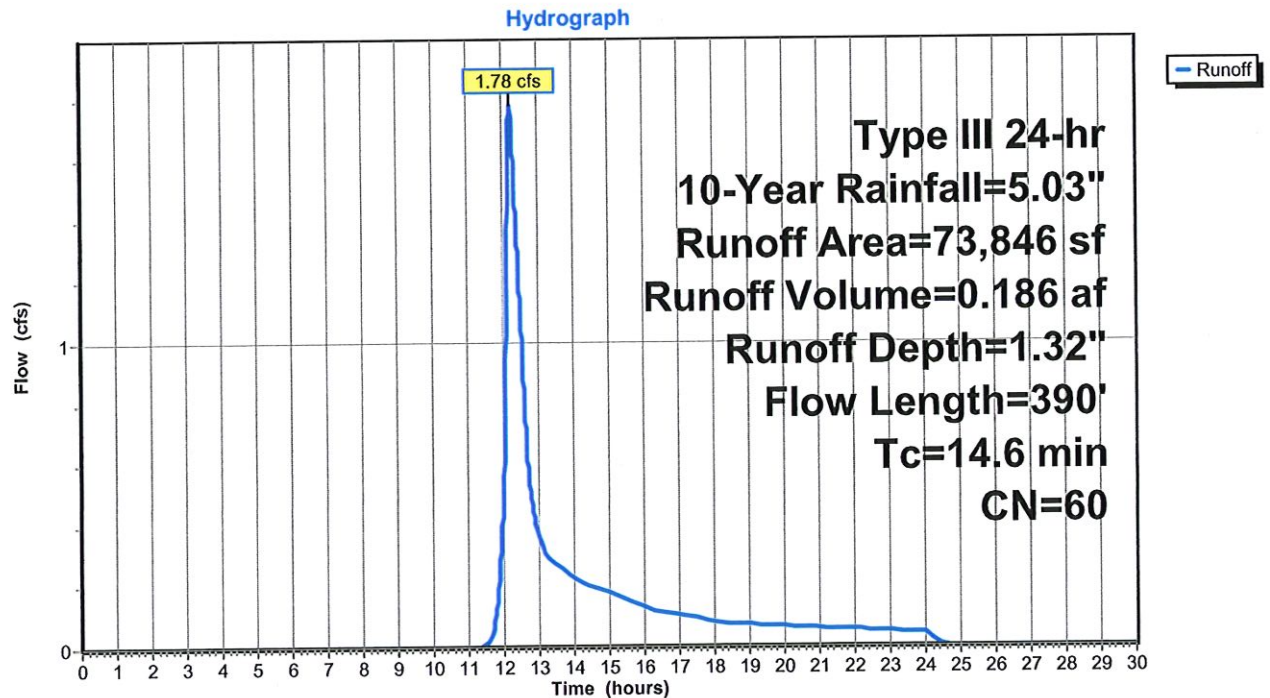

Summary for Pond P - 3: Detention Basin

Inflow Area = 0.963 ac, 87.18% Impervious, Inflow Depth = 4.23" for 10-Year event
 Inflow = 3.60 cfs @ 12.17 hrs, Volume= 0.339 af
 Outflow = 2.24 cfs @ 12.08 hrs, Volume= 0.339 af, Atten= 38%, Lag= 0.0 min
 Discarded = 2.24 cfs @ 12.08 hrs, Volume= 0.339 af
 Primary = 0.00 cfs @ 0.00 hrs, Volume= 0.000 af

Routing by Stor-Ind method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Peak Elev= 158.21' @ 12.35 hrs Surf.Area= 5,372 sf Storage= 1,116 cf

Plug-Flow detention time= 3.4 min calculated for 0.339 af (100% of inflow)
 Center-of-Mass det. time= 3.4 min (788.0 - 784.6)

Volume	Invert	Avail.Storage	Storage Description
#1	158.00'	29,546 cf	Custom Stage Data (Prismatic) Listed below (Recalc)


Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
158.00	5,372	0	0
159.00	5,372	5,372	5,372
160.00	5,372	5,372	10,744
161.00	5,372	5,372	16,116
162.00	5,372	5,372	21,488
163.00	5,372	5,372	26,860
163.50	5,372	2,686	29,546

Device	Routing	Invert	Outlet Devices
#1	Primary	158.25'	3.0" Vert. Orifice/Grate C= 0.600
#2	Primary	161.00'	4.0" Vert. Orifice/Grate C= 0.600
#3	Primary	163.50'	24.0" x 36.0" Horiz. Orifice/Grate C= 0.600 Limited to weir flow at low heads
#4	Discarded	158.00'	18.000 in/hr Exfiltration over Surface area

Discarded OutFlow Max=2.24 cfs @ 12.08 hrs HW=158.06' (Free Discharge)
 ↳ **4=Exfiltration** (Exfiltration Controls 2.24 cfs)

Primary OutFlow Max=0.00 cfs @ 0.00 hrs HW=158.00' (Free Discharge)
 ↳ **1=Orifice/Grate** (Controls 0.00 cfs)
 ↳ **2=Orifice/Grate** (Controls 0.00 cfs)
 ↳ **3=Orifice/Grate** (Controls 0.00 cfs)

Pond P - 3: Detention Basin

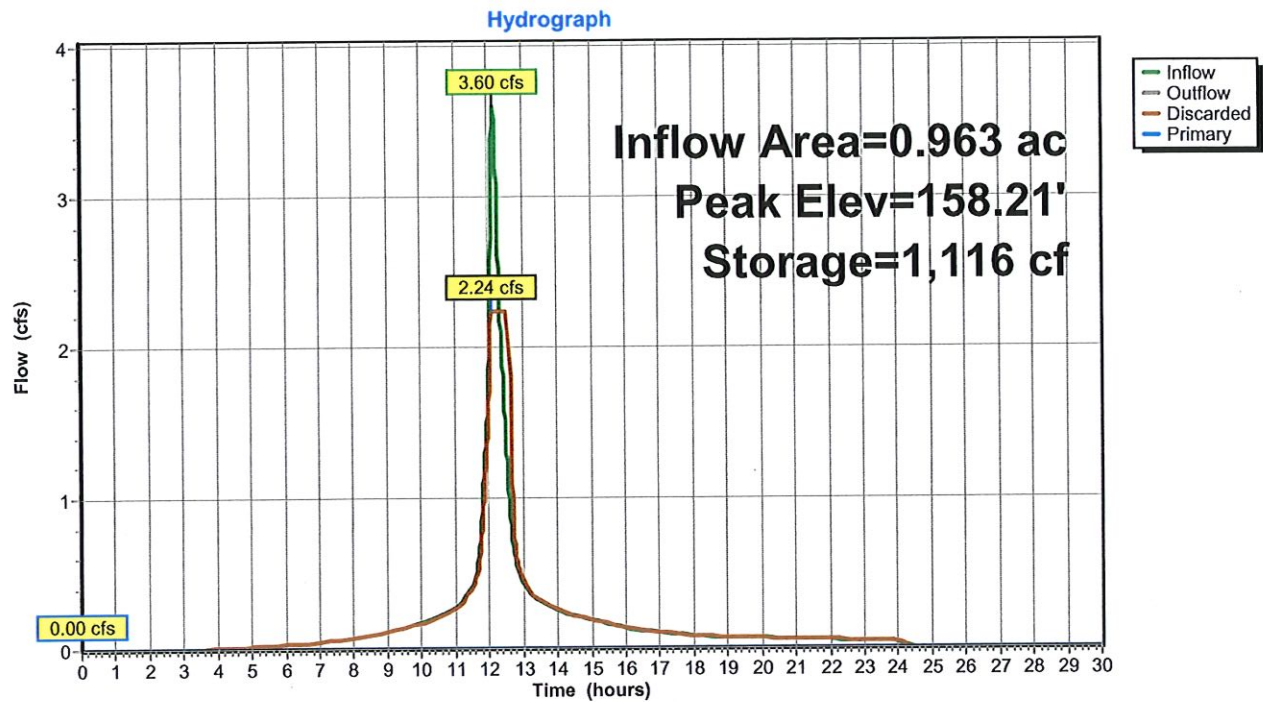


Summary for Link Analysis 1: Analysis 1

Inflow Area = 2.658 ac, 31.57% Impervious, Inflow Depth = 0.84" for 10-Year event
Inflow = 1.78 cfs @ 12.22 hrs, Volume= 0.186 af
Primary = 1.78 cfs @ 12.22 hrs, Volume= 0.186 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs

Link Analysis 1: Analysis 1

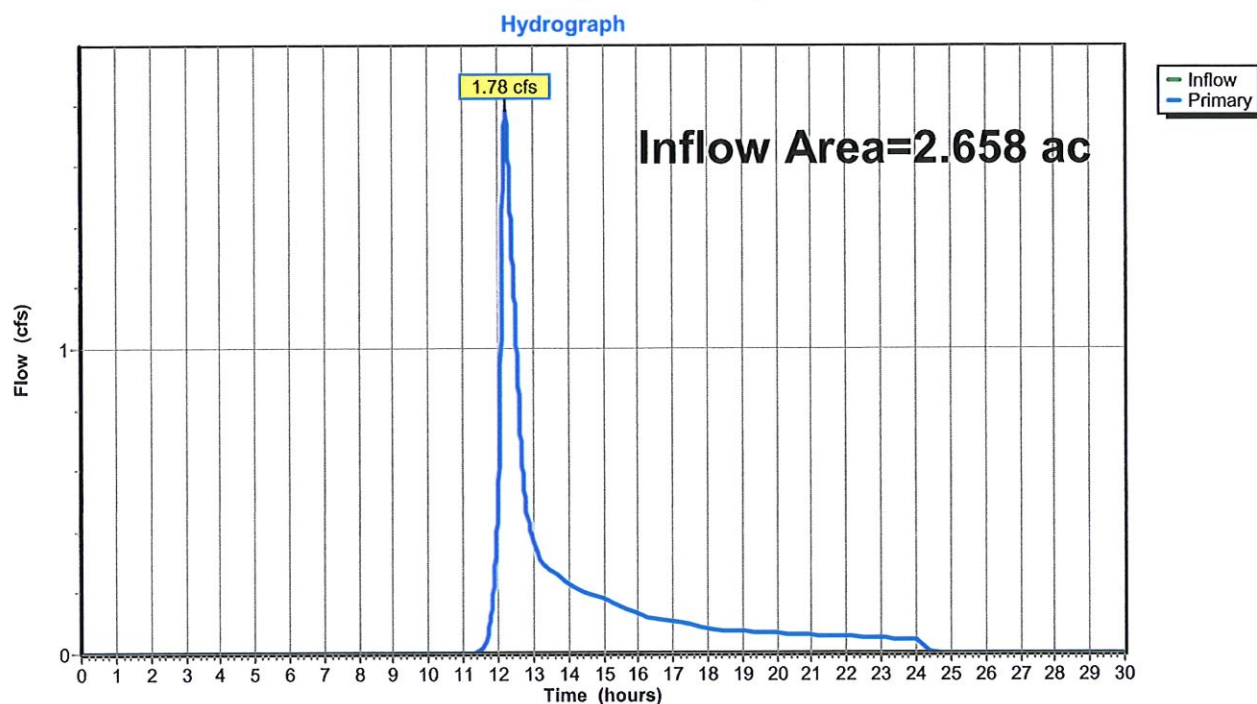

Summary for Subcatchment 1 - EX: Ex. Area 1


Runoff = 4.46 cfs @ 12.26 hrs, Volume= 0.470 af, Depth= 2.12"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 25-Year Rainfall=6.30"

Area (sf)	CN	Description
115,773	60	Woods, Fair, HSG B
115,773		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.4	100	0.0900	0.15		Sheet Flow, Wooded
					Woods: Light underbrush n= 0.400 P2= 3.39"
6.0	460	0.0643	1.27		Shallow Concentrated Flow, Balance of Flow
					Woodland Kv= 5.0 fps
17.4	560	Total			

Subcatchment 1 - EX: Ex. Area 1

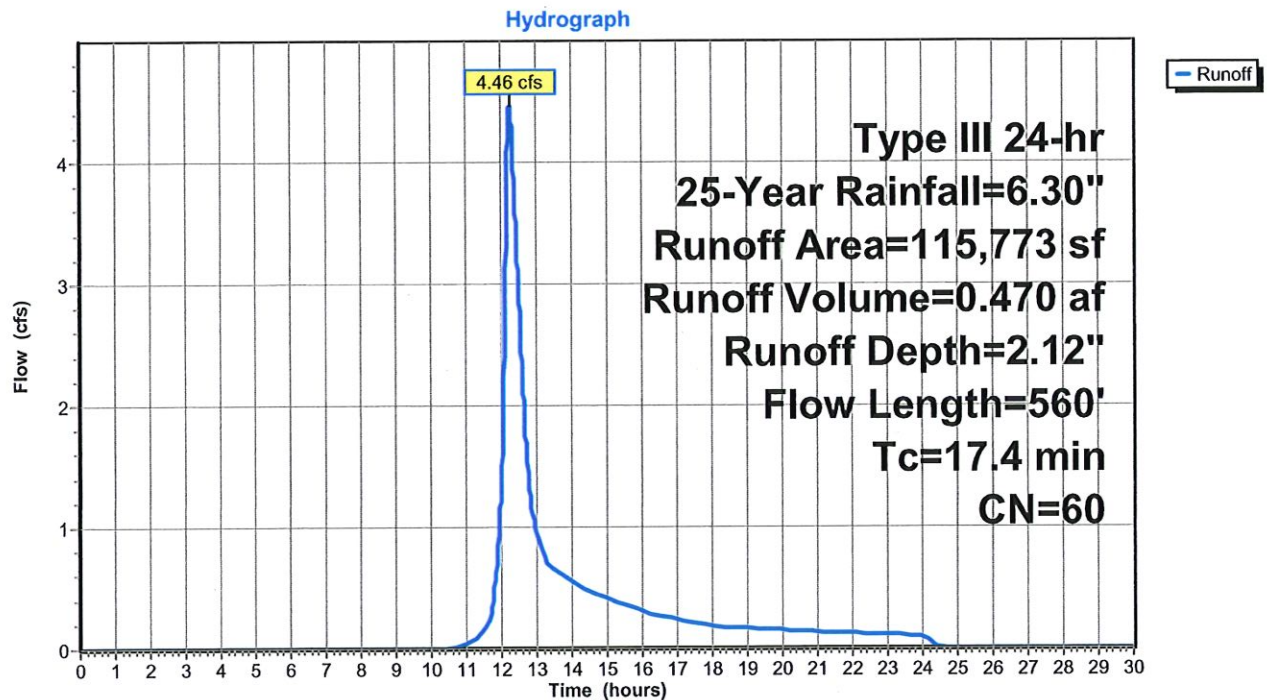

Summary for Subcatchment 1 - P: Proposed Area 1, 2, and 3


Runoff = 4.60 cfs @ 12.17 hrs, Volume= 0.439 af, Depth= 5.48"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 25-Year Rainfall=6.30"

Area (sf)	CN	Description
5,376	60	Woods, Fair, HSG B
28,855	98	Paved parking, HSG B
7,696	98	Roofs, HSG B
41,927	93	Weighted Average
5,376		12.82% Pervious Area
36,551		87.18% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.7	100	0.0900	0.14		Sheet Flow, Grass Grass: Bermuda n= 0.410 P2= 3.39"
0.5	38	0.0286	1.18		Shallow Concentrated Flow, Flow to Pavement Short Grass Pasture Kv= 7.0 fps
0.5	132	0.0423	4.18		Shallow Concentrated Flow, Balance of Flow Path to CB 2 Paved Kv= 20.3 fps
0.3	160	0.0300	9.12	11.19	Pipe Channel, HDPE_Round 15" 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.013 Corrugated PE, smooth interior
13.0	430	Total			

Subcatchment 1 - P: Proposed Area 1, 2, and 3

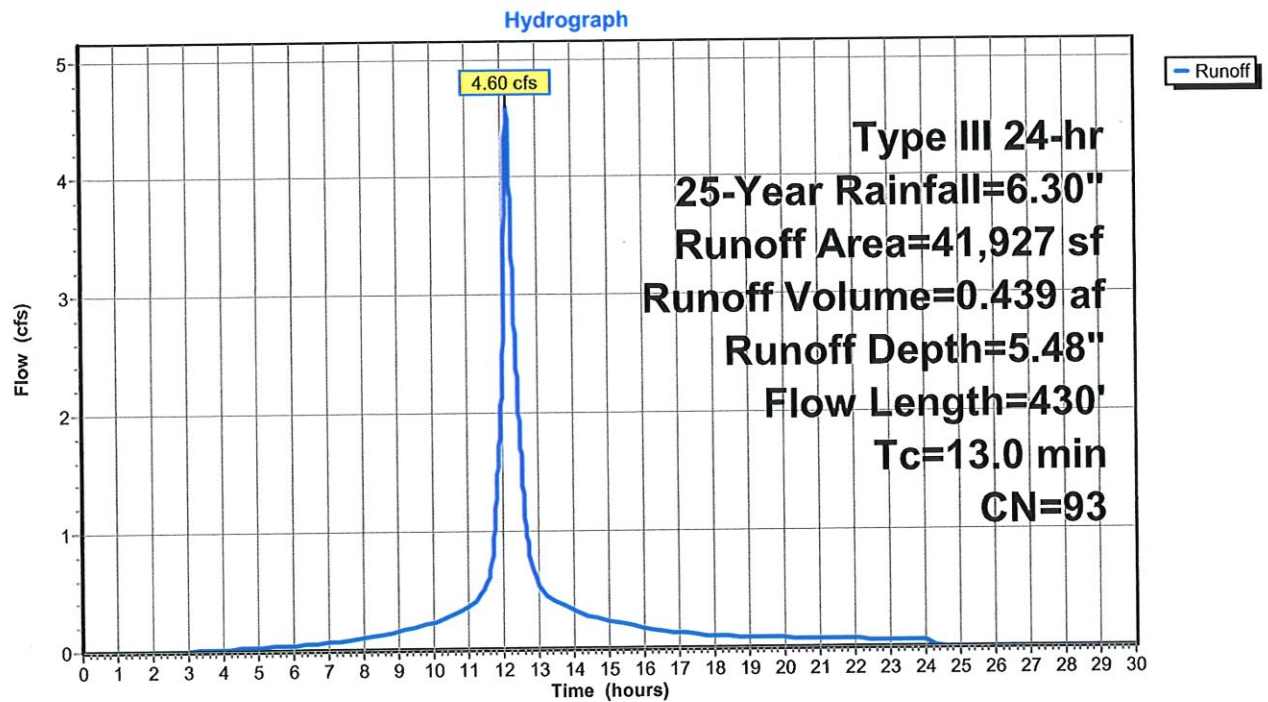

Summary for Subcatchment 4 - P: Proposed Area 4


Runoff = 3.05 cfs @ 12.21 hrs, Volume= 0.300 af, Depth= 2.12"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 25-Year Rainfall=6.30"

Area (sf)	CN	Description
73,846	60	Woods, Fair, HSG B
73,846		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.6	100	0.0700	0.13		Sheet Flow, Existing Wooded Area Woods: Light underbrush n= 0.400 P2= 3.39"
1.6	130	0.0692	1.32		Shallow Concentrated Flow, Concentrated to Channel Woodland Kv= 5.0 fps
0.4	160	0.0825	6.51	26.06	Channel Flow, Balance of Flow to Analysis Point Area= 4.0 sf Perim= 6.0' r= 0.67' n= 0.050 Mountain streams w/large boulders
14.6	390	Total			

Subcatchment 4 - P: Proposed Area 4

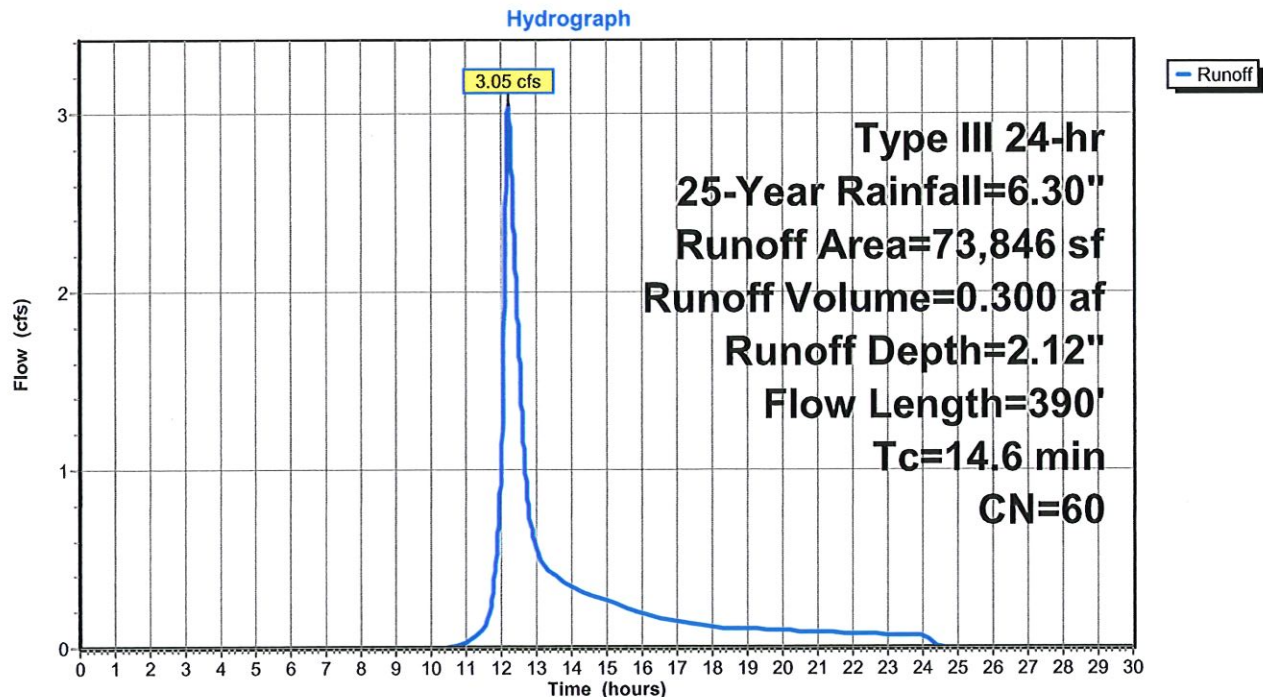

Summary for Pond P - 3: Detention Basin

Inflow Area = 0.963 ac, 87.18% Impervious, Inflow Depth = 5.48" for 25-Year event
 Inflow = 4.60 cfs @ 12.17 hrs, Volume= 0.439 af
 Outflow = 2.28 cfs @ 12.43 hrs, Volume= 0.439 af, Atten= 50%, Lag= 15.2 min
 Discarded = 2.24 cfs @ 12.03 hrs, Volume= 0.438 af
 Primary = 0.04 cfs @ 12.43 hrs, Volume= 0.001 af

Routing by Stor-Ind method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Peak Elev= 158.40' @ 12.43 hrs Surf.Area= 5,372 sf Storage= 2,154 cf

Plug-Flow detention time= 5.3 min calculated for 0.439 af (100% of inflow)
 Center-of-Mass det. time= 5.3 min (783.4 - 778.1)

Volume	Invert	Avail.Storage	Storage Description
#1	158.00'	29,546 cf	Custom Stage Data (Prismatic) Listed below (Recalc)


Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
158.00	5,372	0	0
159.00	5,372	5,372	5,372
160.00	5,372	5,372	10,744
161.00	5,372	5,372	16,116
162.00	5,372	5,372	21,488
163.00	5,372	5,372	26,860
163.50	5,372	2,686	29,546

Device	Routing	Invert	Outlet Devices
#1	Primary	158.25'	3.0" Vert. Orifice/Grate C= 0.600
#2	Primary	161.00'	4.0" Vert. Orifice/Grate C= 0.600
#3	Primary	163.50'	24.0" x 36.0" Horiz. Orifice/Grate C= 0.600 Limited to weir flow at low heads
#4	Discarded	158.00'	18.000 in/hr Exfiltration over Surface area

Discarded OutFlow Max=2.24 cfs @ 12.03 hrs HW=158.06' (Free Discharge)
 ↳4=Exfiltration (Exfiltration Controls 2.24 cfs)

Primary OutFlow Max=0.04 cfs @ 12.43 hrs HW=158.40' (Free Discharge)
 ↳1=Orifice/Grate (Orifice Controls 0.04 cfs @ 1.32 fps)
 ↳2=Orifice/Grate (Controls 0.00 cfs)
 ↳3=Orifice/Grate (Controls 0.00 cfs)

Pond P - 3: Detention Basin

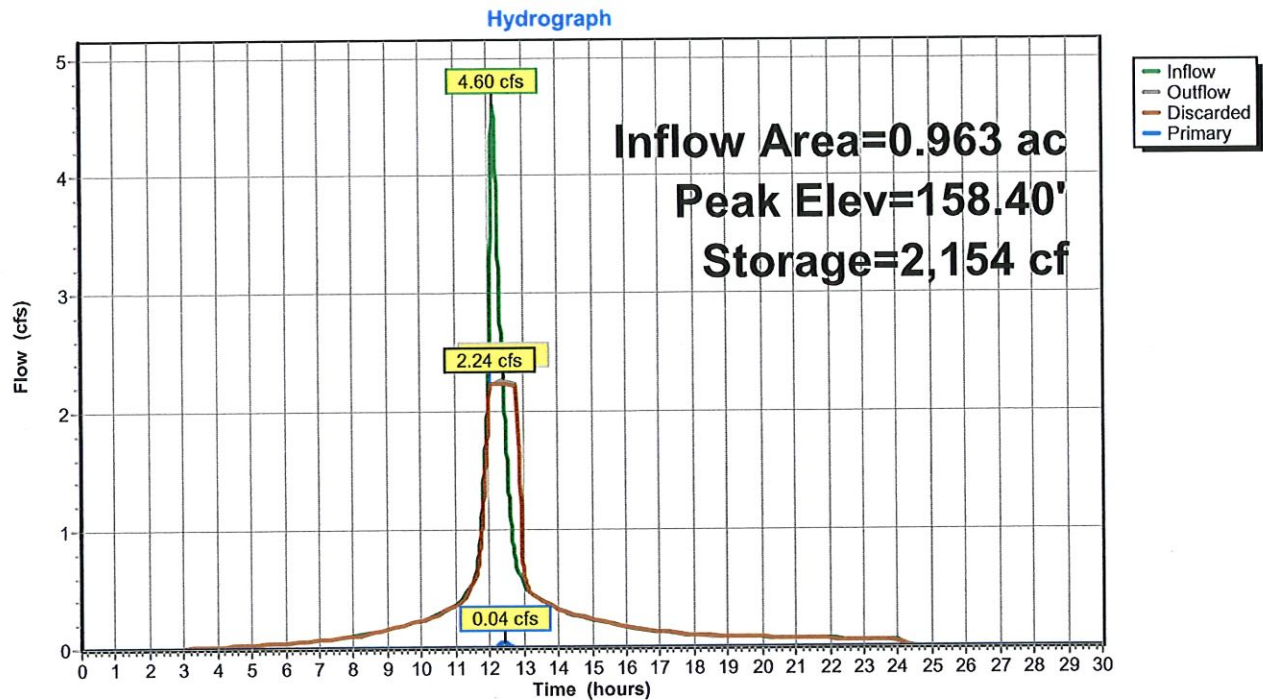


Summary for Link Analysis 1: Analysis 1

Inflow Area = 2.658 ac, 31.57% Impervious, Inflow Depth = 1.36" for 25-Year event
Inflow = 3.05 cfs @ 12.22 hrs, Volume= 0.301 af
Primary = 3.05 cfs @ 12.22 hrs, Volume= 0.301 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs

Link Analysis 1: Analysis 1

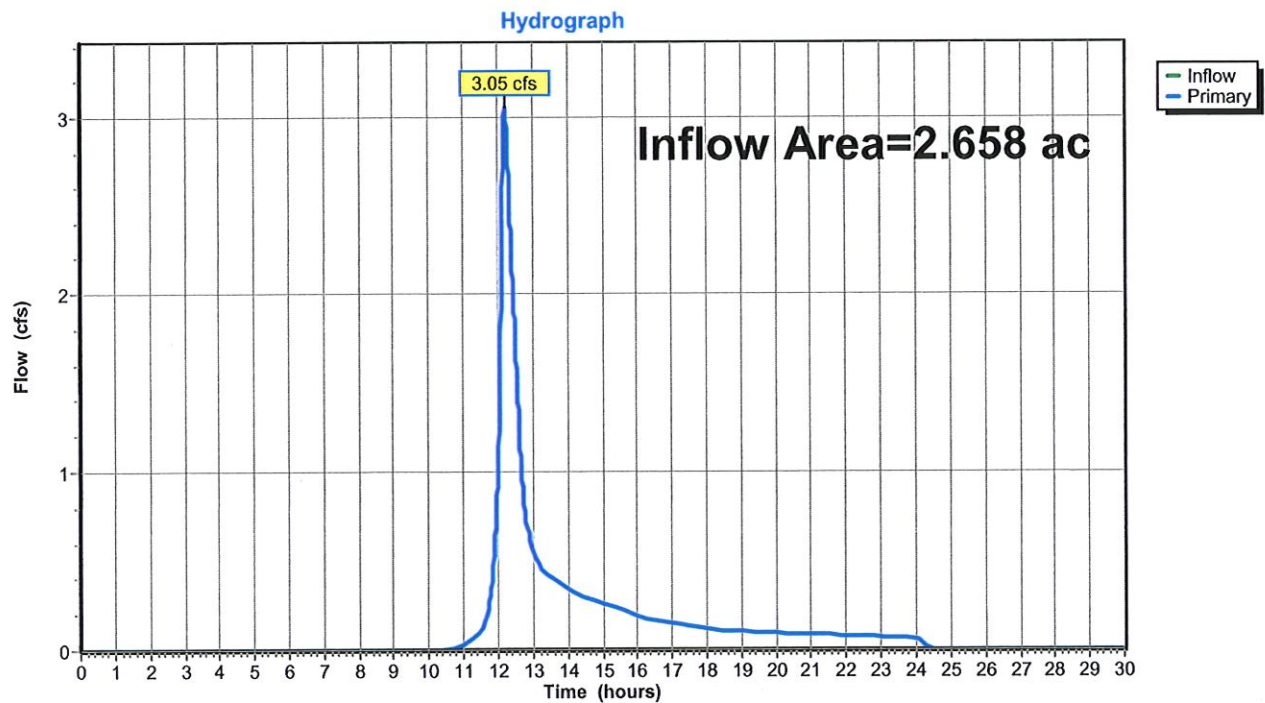

Summary for Subcatchment 1 - EX: Ex. Area 1


Runoff = 6.38 cfs @ 12.24 hrs, Volume= 0.653 af, Depth= 2.95"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 50-Year Rainfall=7.48"

Area (sf)	CN	Description
115,773	60	Woods, Fair, HSG B
115,773		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.4	100	0.0900	0.15		Sheet Flow, Wooded Woods: Light underbrush n= 0.400 P2= 3.39"
6.0	460	0.0643	1.27		Shallow Concentrated Flow, Balance of Flow Woodland Kv= 5.0 fps
17.4	560	Total			

Subcatchment 1 - EX: Ex. Area 1

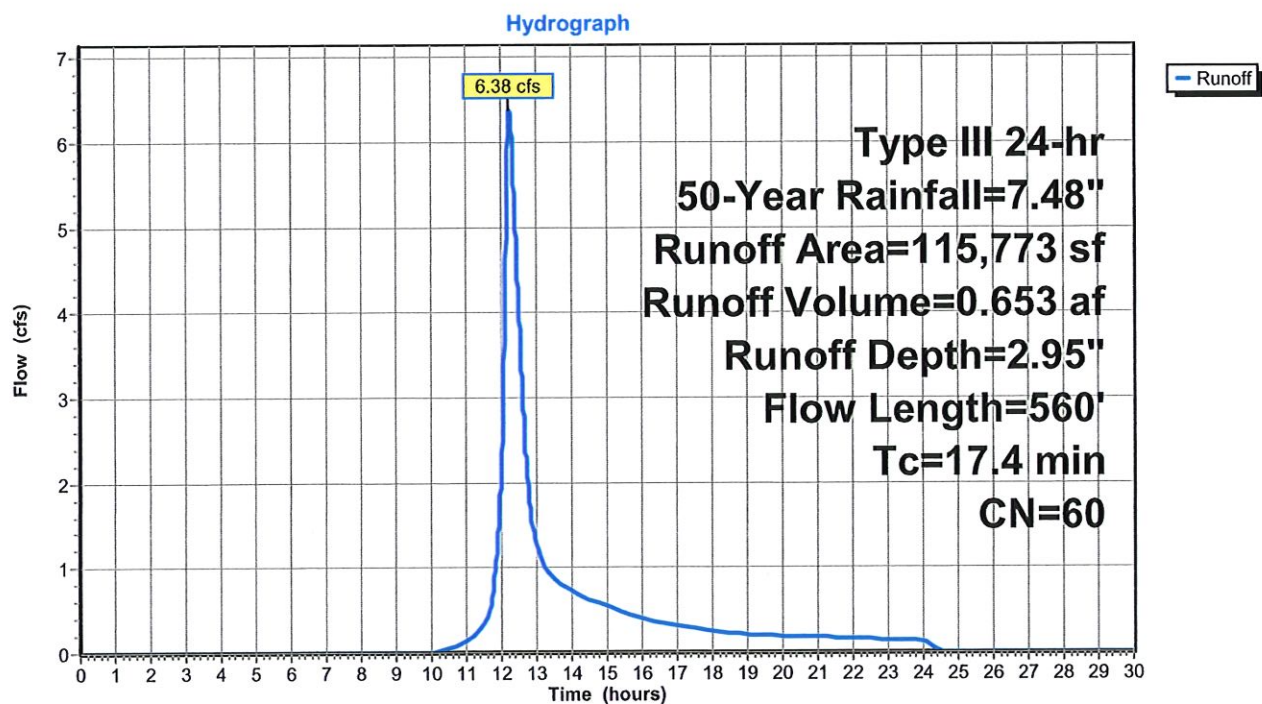

Summary for Subcatchment 1 - P: Proposed Area 1, 2, and 3


Runoff = 5.52 cfs @ 12.17 hrs, Volume= 0.533 af, Depth= 6.65"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 50-Year Rainfall=7.48"

Area (sf)	CN	Description
5,376	60	Woods, Fair, HSG B
28,855	98	Paved parking, HSG B
7,696	98	Roofs, HSG B
41,927	93	Weighted Average
5,376		12.82% Pervious Area
36,551		87.18% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.7	100	0.0900	0.14		Sheet Flow, Grass Grass: Bermuda n= 0.410 P2= 3.39"
0.5	38	0.0286	1.18		Shallow Concentrated Flow, Flow to Pavement Short Grass Pasture Kv= 7.0 fps
0.5	132	0.0423	4.18		Shallow Concentrated Flow, Balance of Flow Path to CB 2 Paved Kv= 20.3 fps
0.3	160	0.0300	9.12	11.19	Pipe Channel, HDPE_Round 15" 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.013 Corrugated PE, smooth interior
13.0	430	Total			

Subcatchment 1 - P: Proposed Area 1, 2, and 3

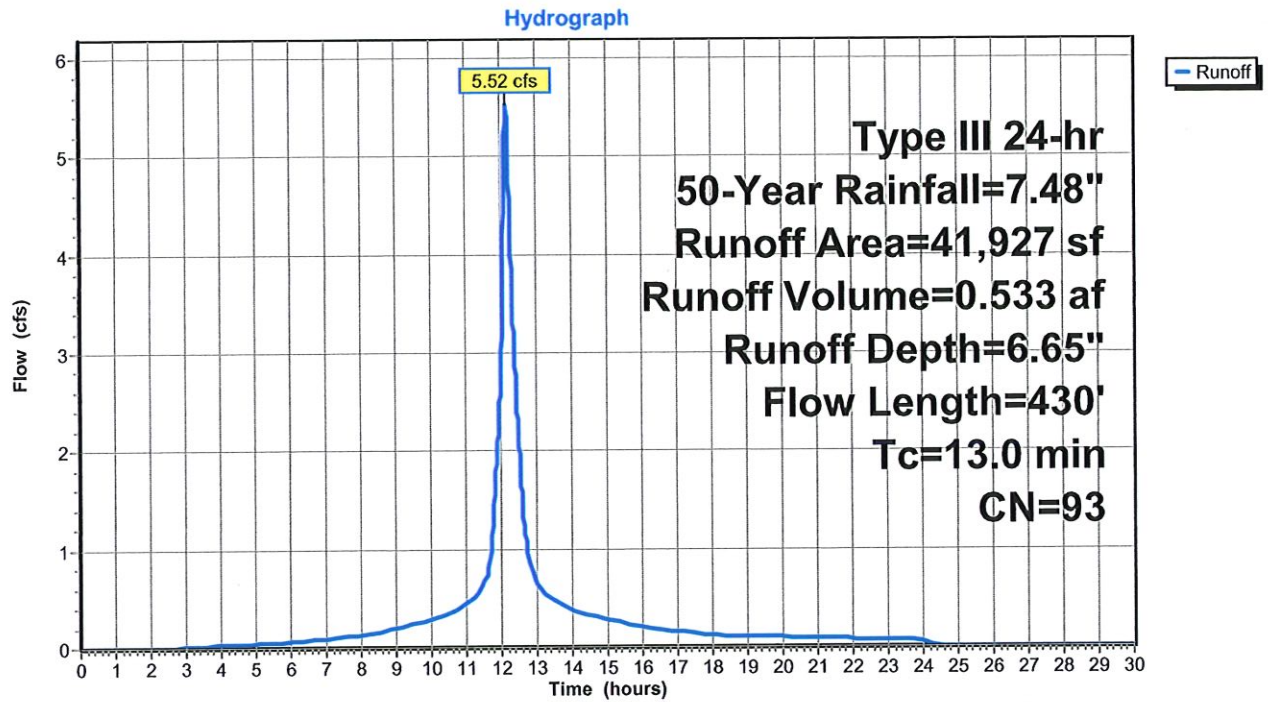

Summary for Subcatchment 4 - P: Proposed Area 4


Runoff = 4.36 cfs @ 12.21 hrs, Volume= 0.417 af, Depth= 2.95"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 50-Year Rainfall=7.48"

Area (sf)	CN	Description
73,846	60	Woods, Fair, HSG B
73,846		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.6	100	0.0700	0.13		Sheet Flow, Existing Wooded Area Woods: Light underbrush n= 0.400 P2= 3.39"
1.6	130	0.0692	1.32		Shallow Concentrated Flow, Concentrated to Channel Woodland Kv= 5.0 fps
0.4	160	0.0825	6.51	26.06	Channel Flow, Balance of Flow to Analysis Point Area= 4.0 sf Perim= 6.0' r= 0.67' n= 0.050 Mountain streams w/large boulders
14.6	390	Total			

Subcatchment 4 - P: Proposed Area 4

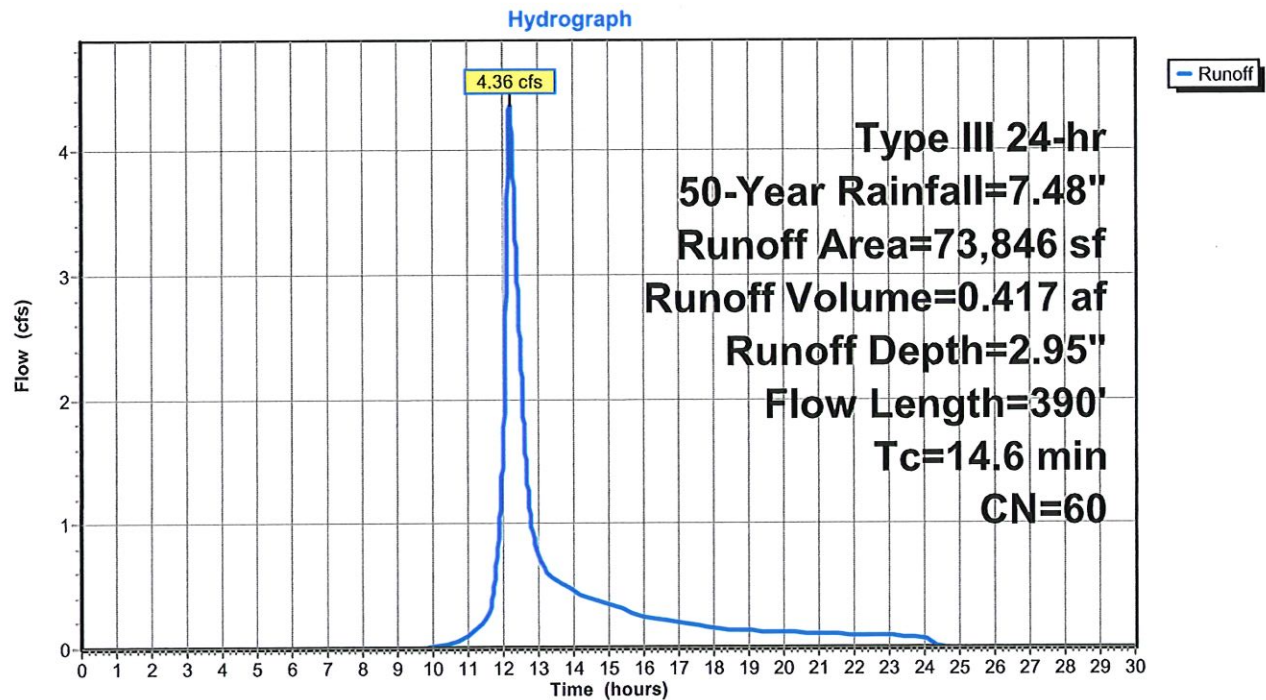

Summary for Pond P - 3: Detention Basin

Inflow Area = 0.963 ac, 87.18% Impervious, Inflow Depth = 6.65" for 50-Year event
 Inflow = 5.52 cfs @ 12.17 hrs, Volume= 0.533 af
 Outflow = 2.35 cfs @ 12.48 hrs, Volume= 0.533 af, Atten= 57%, Lag= 18.2 min
 Discarded = 2.24 cfs @ 11.97 hrs, Volume= 0.528 af
 Primary = 0.11 cfs @ 12.48 hrs, Volume= 0.005 af

Routing by Stor-Ind method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Peak Elev= 158.61' @ 12.48 hrs Surf.Area= 5,372 sf Storage= 3,262 cf

Plug-Flow detention time= 7.4 min calculated for 0.533 af (100% of inflow)
 Center-of-Mass det. time= 7.4 min (780.9 - 773.6)

Volume	Invert	Avail.Storage	Storage Description
#1	158.00'	29,546 cf	Custom Stage Data (Prismatic) Listed below (Recalc)


Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
158.00	5,372	0	0
159.00	5,372	5,372	5,372
160.00	5,372	5,372	10,744
161.00	5,372	5,372	16,116
162.00	5,372	5,372	21,488
163.00	5,372	5,372	26,860
163.50	5,372	2,686	29,546

Device	Routing	Invert	Outlet Devices
#1	Primary	158.25'	3.0" Vert. Orifice/Grate C= 0.600
#2	Primary	161.00'	4.0" Vert. Orifice/Grate C= 0.600
#3	Primary	163.50'	24.0" x 36.0" Horiz. Orifice/Grate C= 0.600 Limited to weir flow at low heads
#4	Discarded	158.00'	18.000 in/hr Exfiltration over Surface area

Discarded OutFlow Max=2.24 cfs @ 11.97 hrs HW=158.06' (Free Discharge)
 ↳4=Exfiltration (Exfiltration Controls 2.24 cfs)

Primary OutFlow Max=0.11 cfs @ 12.48 hrs HW=158.61' (Free Discharge)
 ↳1=Orifice/Grate (Orifice Controls 0.11 cfs @ 2.32 fps)
 ↳2=Orifice/Grate (Controls 0.00 cfs)
 ↳3=Orifice/Grate (Controls 0.00 cfs)

Pond P - 3: Detention Basin

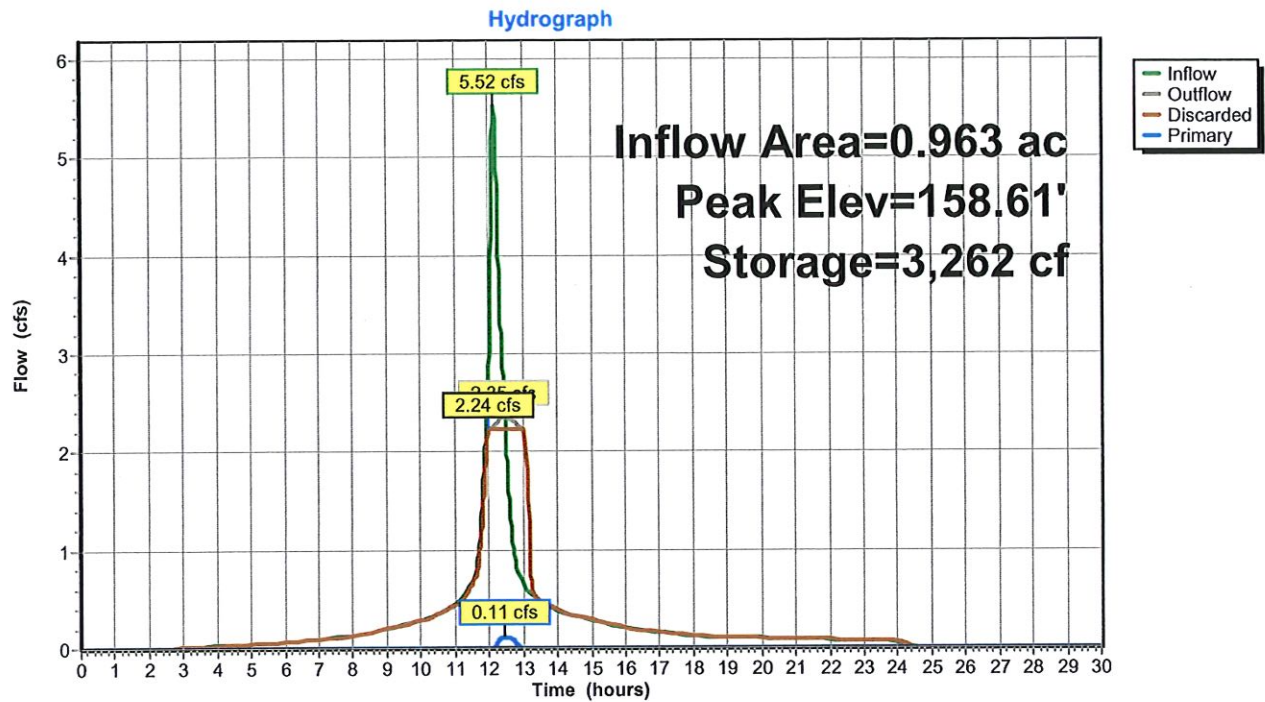


Summary for Link Analysis 1: Analysis 1

Inflow Area = 2.658 ac, 31.57% Impervious, Inflow Depth = 1.90" for 50-Year event
Inflow = 4.39 cfs @ 12.21 hrs, Volume= 0.421 af
Primary = 4.39 cfs @ 12.21 hrs, Volume= 0.421 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs

Link Analysis 1: Analysis 1

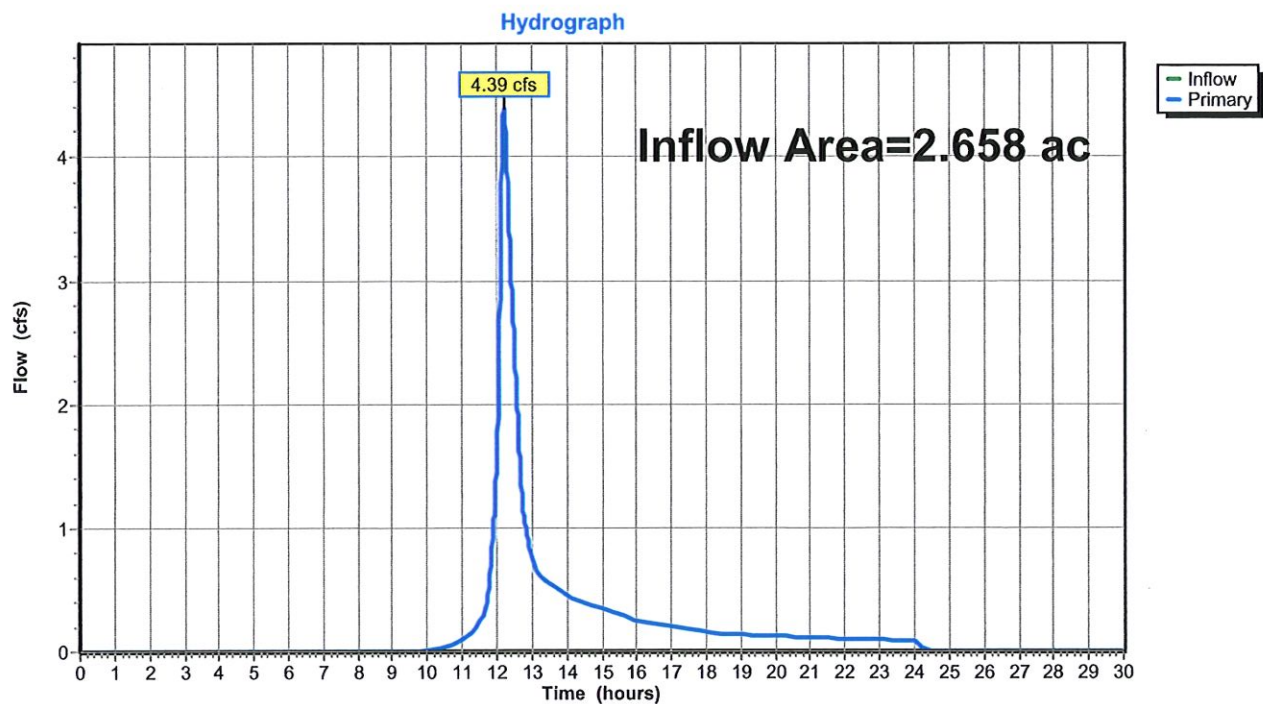

Summary for Subcatchment 1 - EX: Ex. Area 1


Runoff = 8.82 cfs @ 12.24 hrs, Volume= 0.887 af, Depth= 4.01"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 100-Year Rainfall=8.88"

Area (sf)	CN	Description
115,773	60	Woods, Fair, HSG B
115,773		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.4	100	0.0900	0.15		Sheet Flow, Wooded
					Woods: Light underbrush n= 0.400 P2= 3.39"
6.0	460	0.0643	1.27		Shallow Concentrated Flow, Balance of Flow
					Woodland Kv= 5.0 fps
17.4	560	Total			

Subcatchment 1 - EX: Ex. Area 1

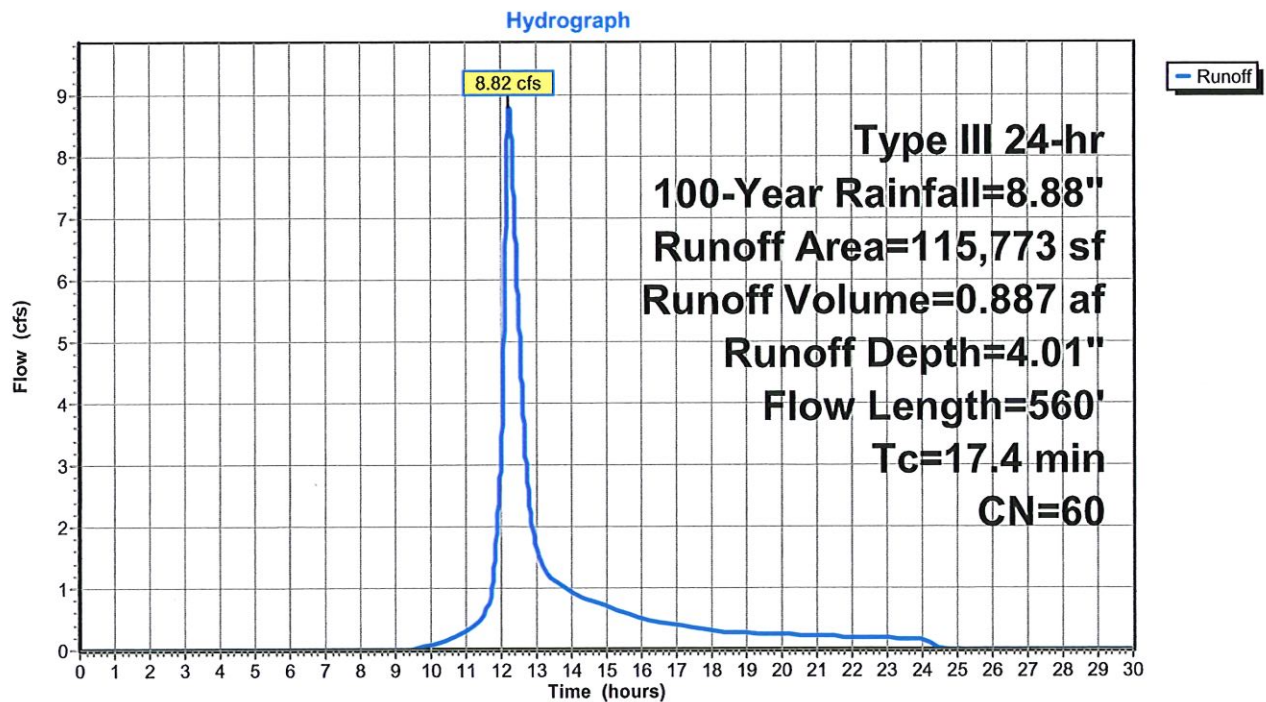

Summary for Subcatchment 1 - P: Proposed Area 1, 2, and 3


Runoff = 6.61 cfs @ 12.17 hrs, Volume= 0.645 af, Depth= 8.04"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 100-Year Rainfall=8.88"

Area (sf)	CN	Description
5,376	60	Woods, Fair, HSG B
28,855	98	Paved parking, HSG B
7,696	98	Roofs, HSG B
41,927	93	Weighted Average
5,376		12.82% Pervious Area
36,551		87.18% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.7	100	0.0900	0.14		Sheet Flow, Grass Grass: Bermuda n= 0.410 P2= 3.39"
0.5	38	0.0286	1.18		Shallow Concentrated Flow, Flow to Pavement Short Grass Pasture Kv= 7.0 fps
0.5	132	0.0423	4.18		Shallow Concentrated Flow, Balance of Flow Path to CB 2 Paved Kv= 20.3 fps
0.3	160	0.0300	9.12	11.19	Pipe Channel, HDPE_Round 15" 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.013 Corrugated PE, smooth interior
13.0	430	Total			

Subcatchment 1 - P: Proposed Area 1, 2, and 3

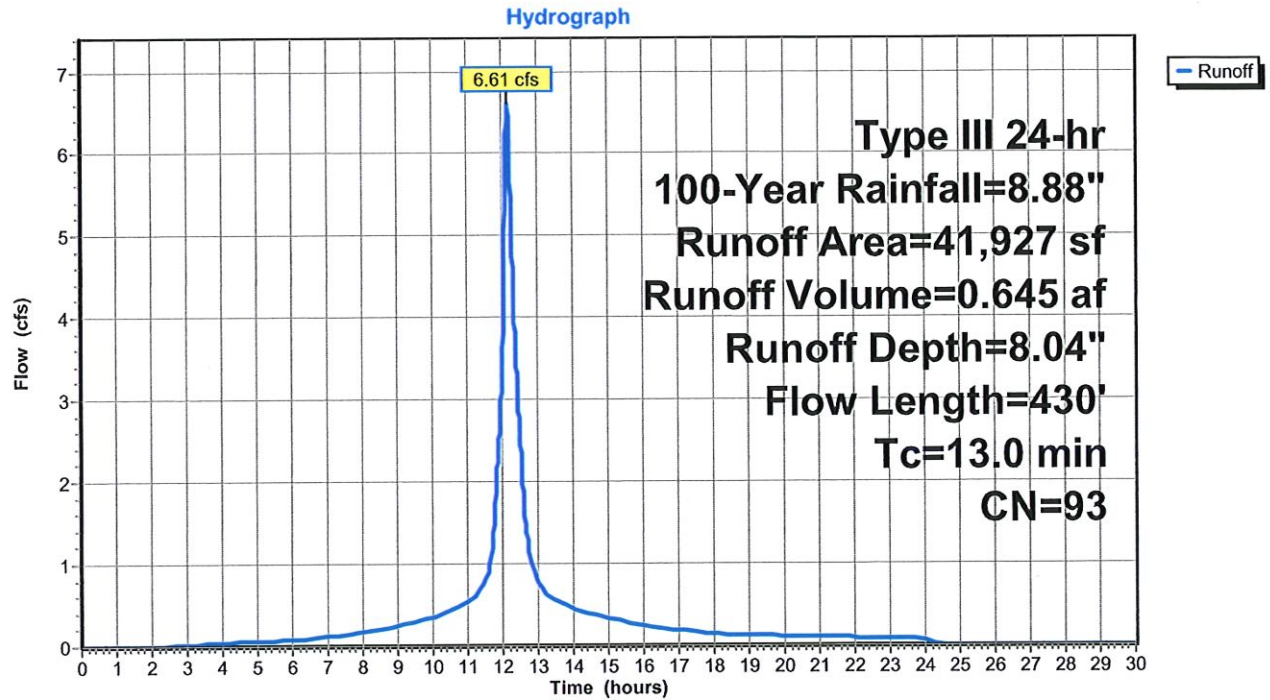

Summary for Subcatchment 4 - P: Proposed Area 4


Runoff = 6.02 cfs @ 12.21 hrs, Volume= 0.566 af, Depth= 4.01"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type III 24-hr 100-Year Rainfall=8.88"

Area (sf)	CN	Description
73,846	60	Woods, Fair, HSG B
73,846		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.6	100	0.0700	0.13		Sheet Flow, Existing Wooded Area Woods: Light underbrush n= 0.400 P2= 3.39"
1.6	130	0.0692	1.32		Shallow Concentrated Flow, Concentrated to Channel Woodland Kv= 5.0 fps
0.4	160	0.0825	6.51	26.06	Channel Flow, Balance of Flow to Analysis Point Area= 4.0 sf Perim= 6.0' r= 0.67' n= 0.050 Mountain streams w/large boulders
14.6	390	Total			

Subcatchment 4 - P: Proposed Area 4

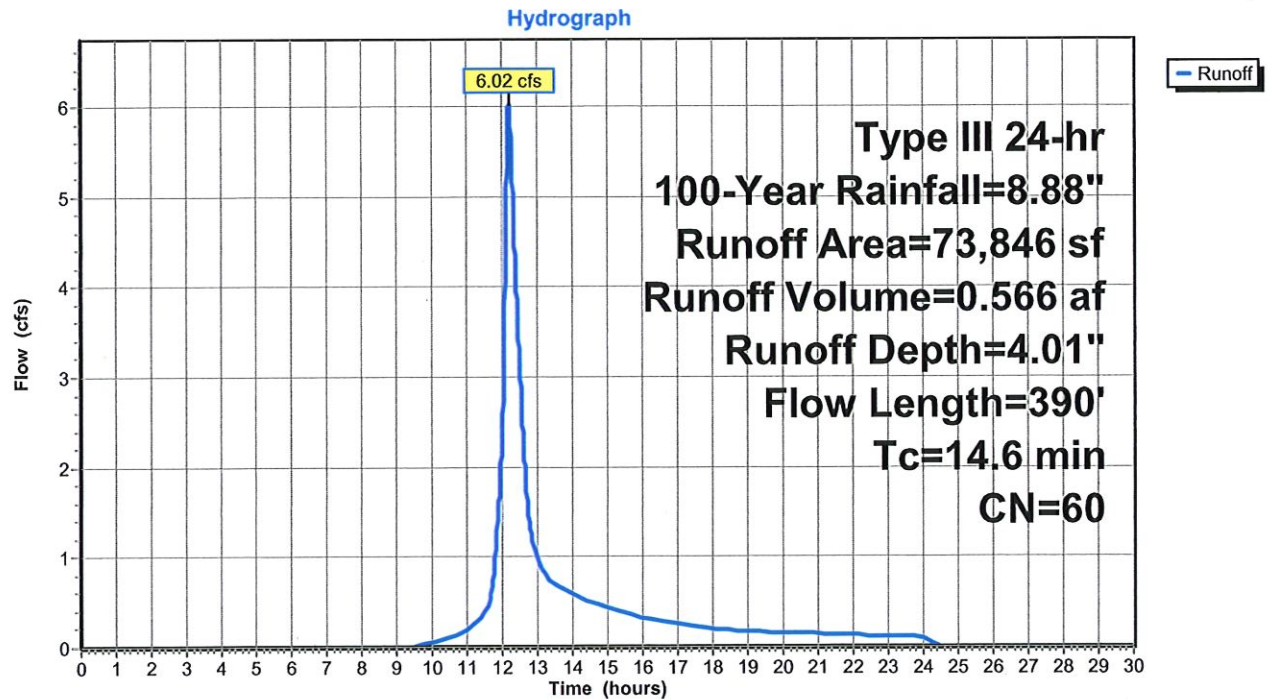

Summary for Pond P - 3: Detention Basin

Inflow Area = 0.963 ac, 87.18% Impervious, Inflow Depth = 8.04" for 100-Year event
 Inflow = 6.61 cfs @ 12.17 hrs, Volume= 0.645 af
 Outflow = 2.41 cfs @ 12.52 hrs, Volume= 0.645 af, Atten= 64%, Lag= 21.1 min
 Discarded = 2.24 cfs @ 11.91 hrs, Volume= 0.634 af
 Primary = 0.17 cfs @ 12.52 hrs, Volume= 0.011 af

Routing by Stor-Ind method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Peak Elev= 158.88' @ 12.52 hrs Surf.Area= 5,372 sf Storage= 4,751 cf

Plug-Flow detention time= 10.3 min calculated for 0.644 af (100% of inflow)
 Center-of-Mass det. time= 10.3 min (779.6 - 769.3)

Volume	Invert	Avail.Storage	Storage Description
#1	158.00'	29,546 cf	Custom Stage Data (Prismatic) Listed below (Recalc)


Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
158.00	5,372	0	0
159.00	5,372	5,372	5,372
160.00	5,372	5,372	10,744
161.00	5,372	5,372	16,116
162.00	5,372	5,372	21,488
163.00	5,372	5,372	26,860
163.50	5,372	2,686	29,546

Device	Routing	Invert	Outlet Devices
#1	Primary	158.25'	3.0" Vert. Orifice/Grate C= 0.600
#2	Primary	161.00'	4.0" Vert. Orifice/Grate C= 0.600
#3	Primary	163.50'	24.0" x 36.0" Horiz. Orifice/Grate C= 0.600 Limited to weir flow at low heads
#4	Discarded	158.00'	18.000 in/hr Exfiltration over Surface area

Discarded OutFlow Max=2.24 cfs @ 11.91 hrs HW=158.06' (Free Discharge)
 ↳ **4=Exfiltration** (Exfiltration Controls 2.24 cfs)

Primary OutFlow Max=0.17 cfs @ 12.52 hrs HW=158.88' (Free Discharge)
 ↳ **1=Orifice/Grate** (Orifice Controls 0.17 cfs @ 3.44 fps)
 ↳ **2=Orifice/Grate** (Controls 0.00 cfs)
 ↳ **3=Orifice/Grate** (Controls 0.00 cfs)

Pond P - 3: Detention Basin

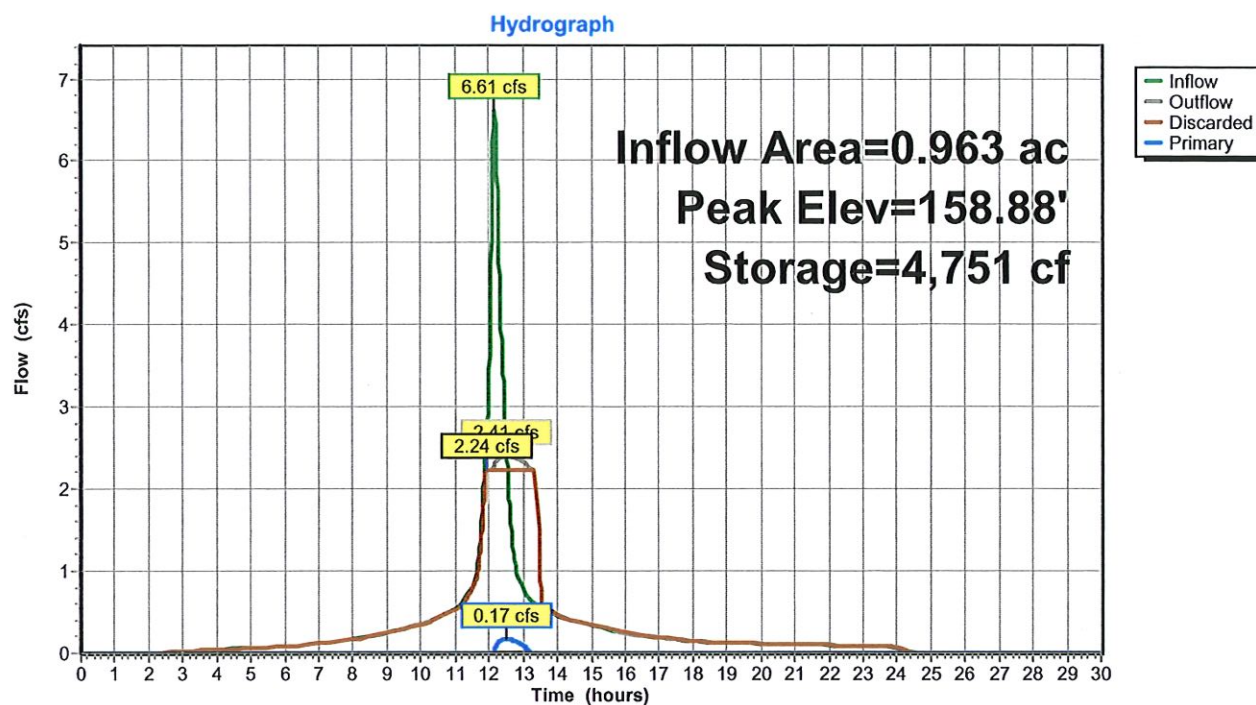


Summary for Link Analysis 1: Analysis 1


Inflow Area = 2.658 ac, 31.57% Impervious, Inflow Depth = 2.60" for 100-Year event
Inflow = 6.11 cfs @ 12.21 hrs, Volume= 0.577 af
Primary = 6.11 cfs @ 12.21 hrs, Volume= 0.577 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs


Link Analysis 1: Analysis 1

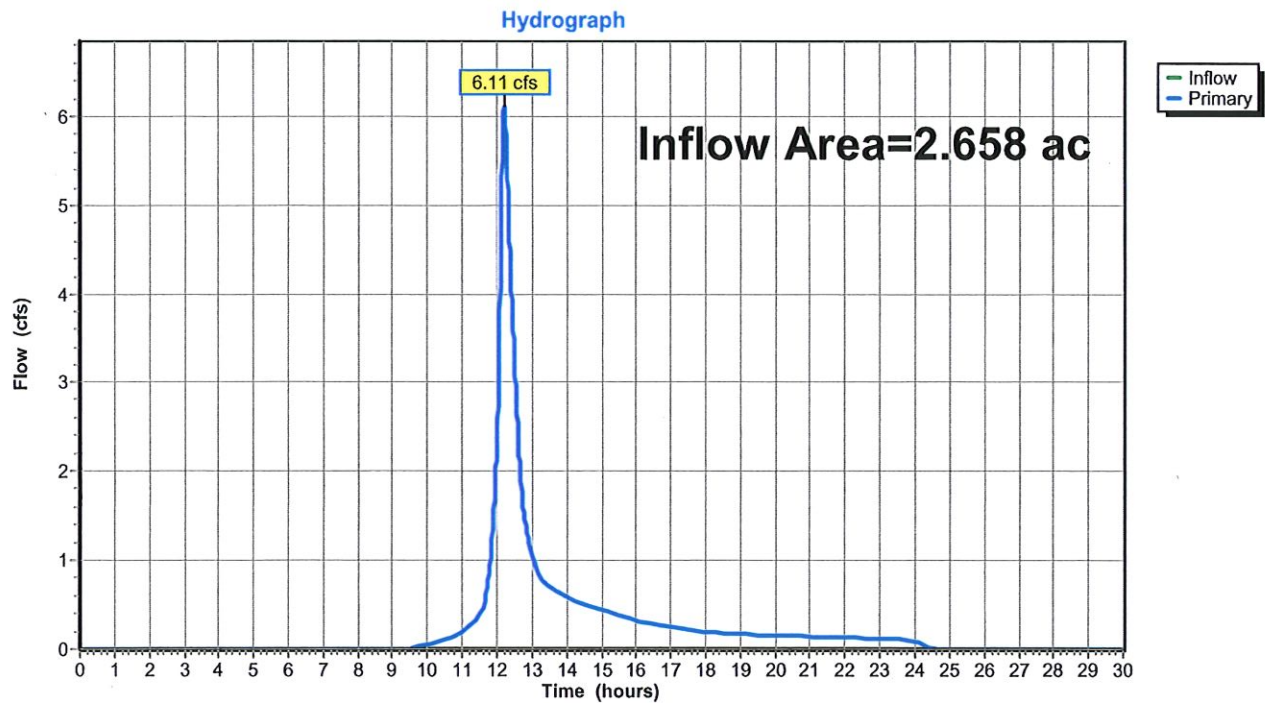

NO. 21-001048 - UNCANSVILLE - 2040 ROUTE 32 - AMER CHOUDREY - GAS STATION - SITE PLAN - 10-3-22 DWG.DWG

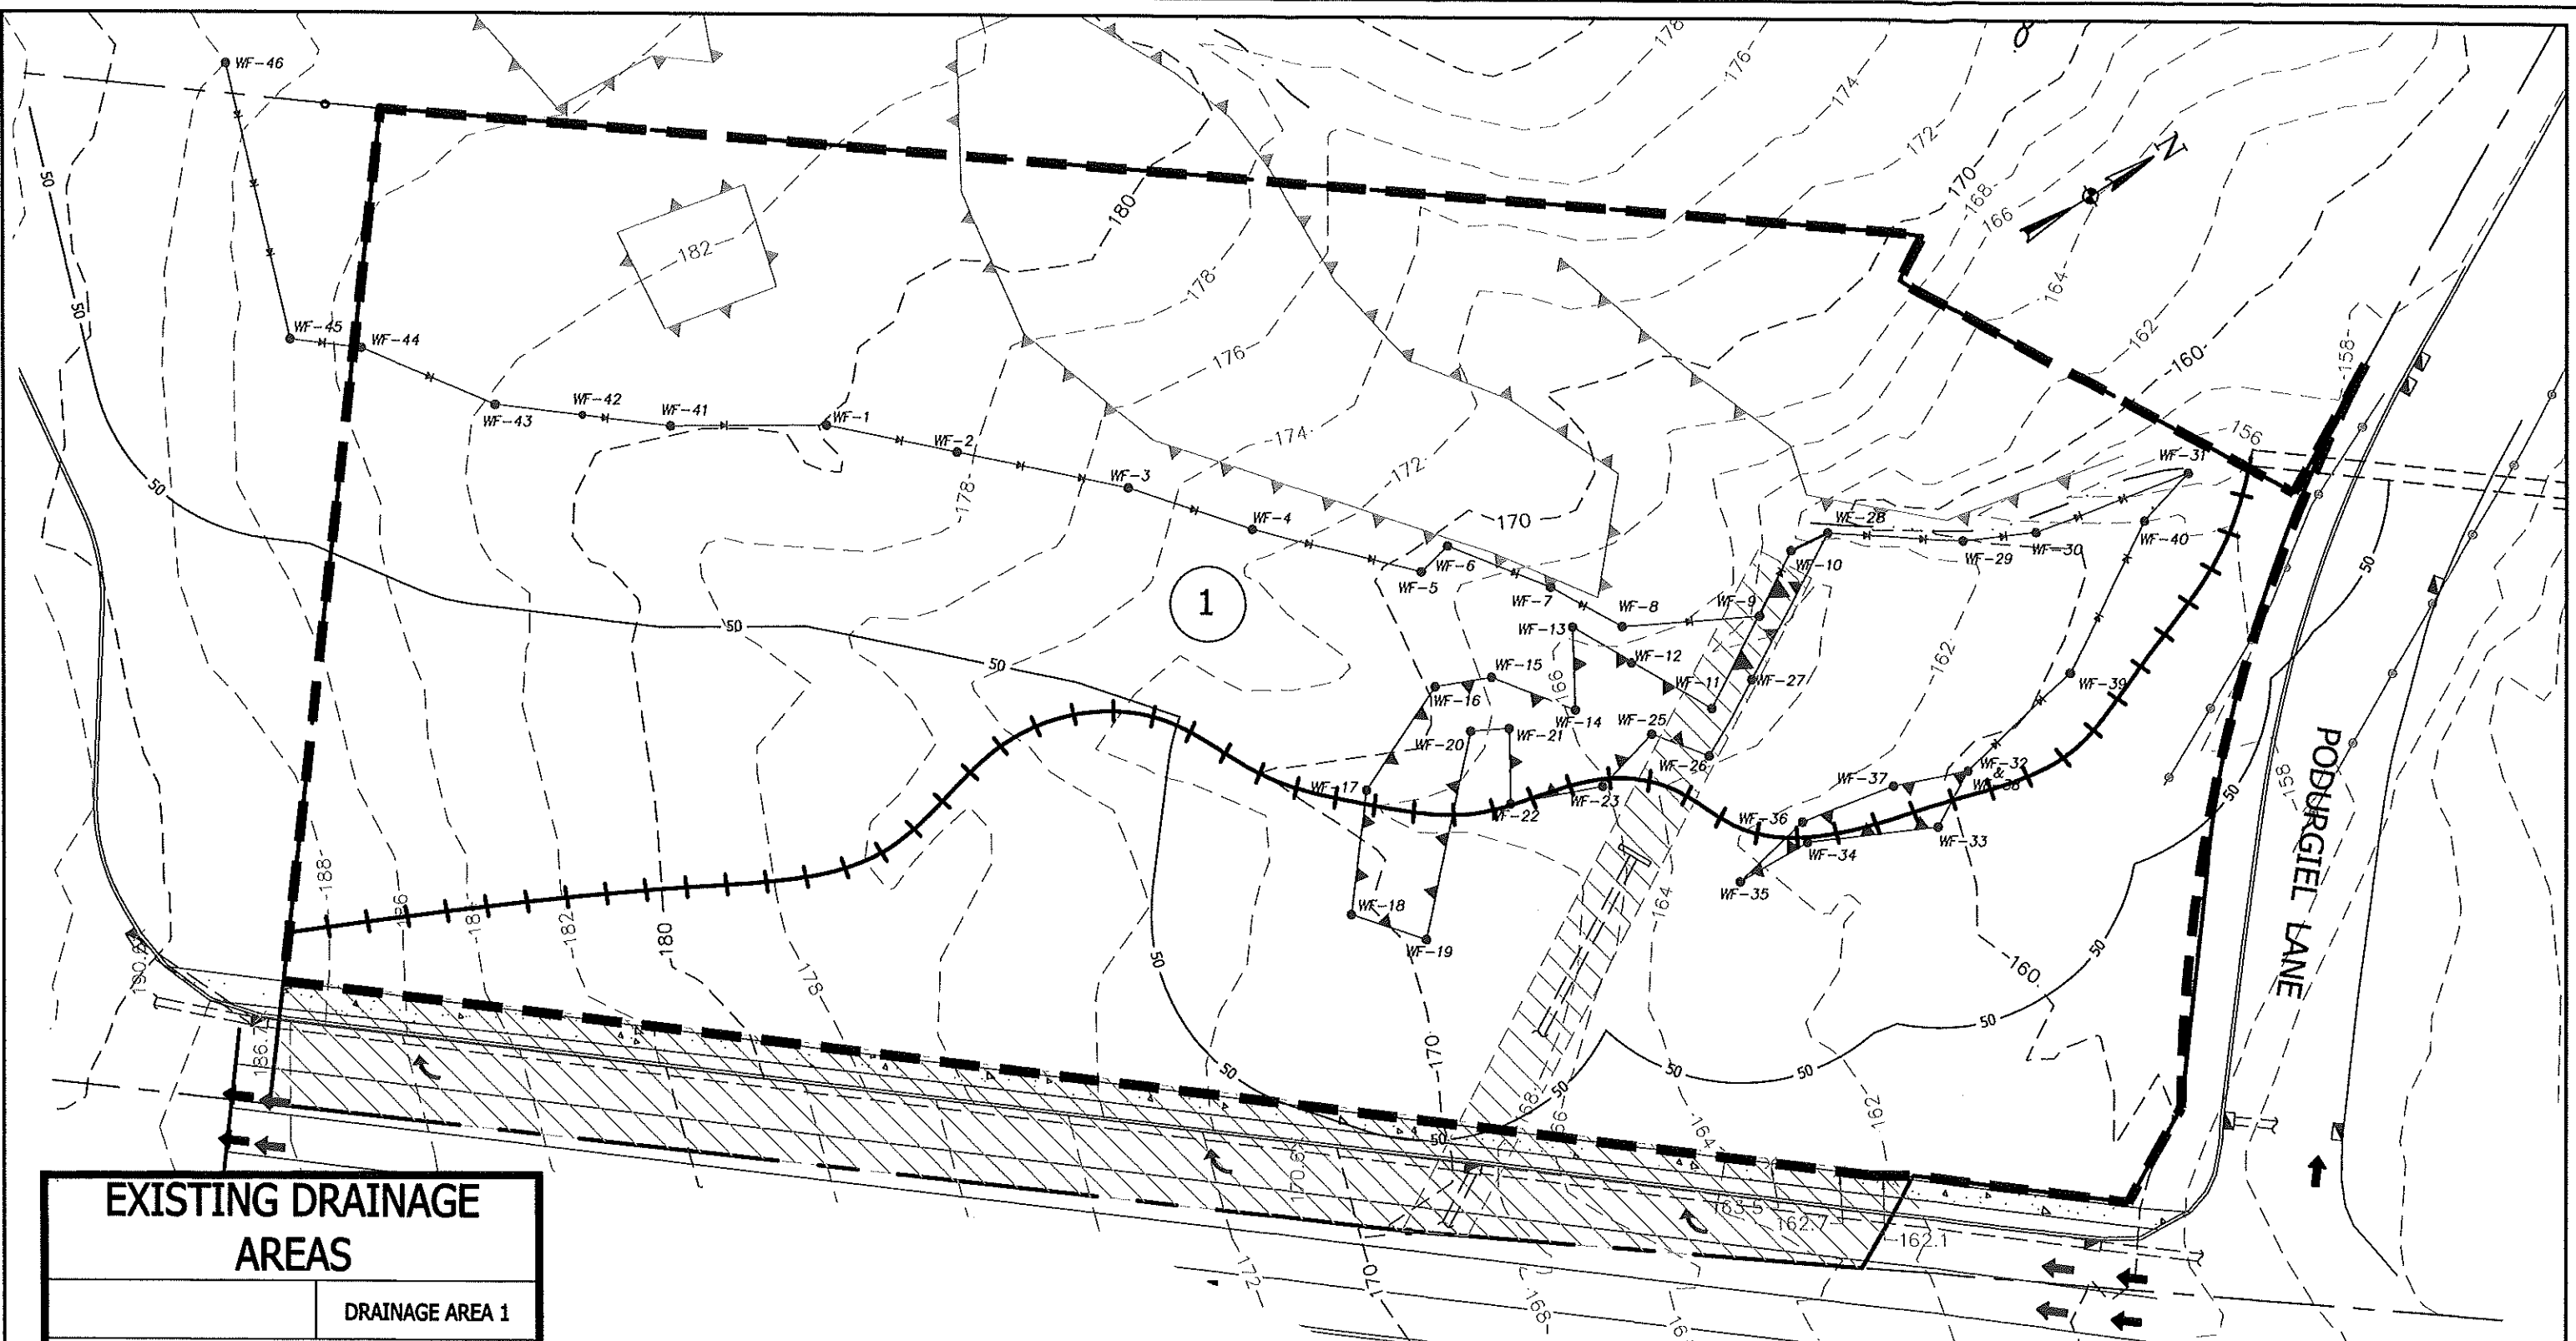

EXISTING DRAINAGE AREAS	
	DRAINAGE AREA 1
BUILDING AREA	0 SF
PARKING/IMPERVIOUS AREA	0 SF
GRAVEL DRIVE	0 SF
WOODED/GRASS PERVIOUS AREA	115,773 SF
TOTAL AREA	115,773 SF



F

FEDUS ENGINEERING, LLC

CIVIL ENGINEERS

Mailing Address: 47 Water Street Mystic, Connecticut 06355

Office: (860) 536-7390 Fax: (860) 536-1644

Gregg T. Fedus P.E.

CT. License No. 21231

Existing Drainage Map

of

2040 New London Turnpike

Uncansville, CT

Prepared For:

AMER CHOUDREY

October 3, 2022


Scale: 1"=40'

JOB NO. 21-001048

Sheet

1 of 1

N:\210121-001048 - UNCANSVILLE - 2040 ROUTE 32 - AMER CHOUDREY - GAS STATION - SITE PLAN - 10-3-22 DWG.DWG
N:\210121-001048 - UNCANSVILLE - 2040 ROUTE 32 - AMER CHOUDREY - GAS STATION - SITE PLAN APPROVAL\CDL-001048 - UNCANSVILLE - 2040 ROUTE 32 - AMER CHOUDREY - GAS STATION - SITE PLAN - 10-3-22 DWG.DWG

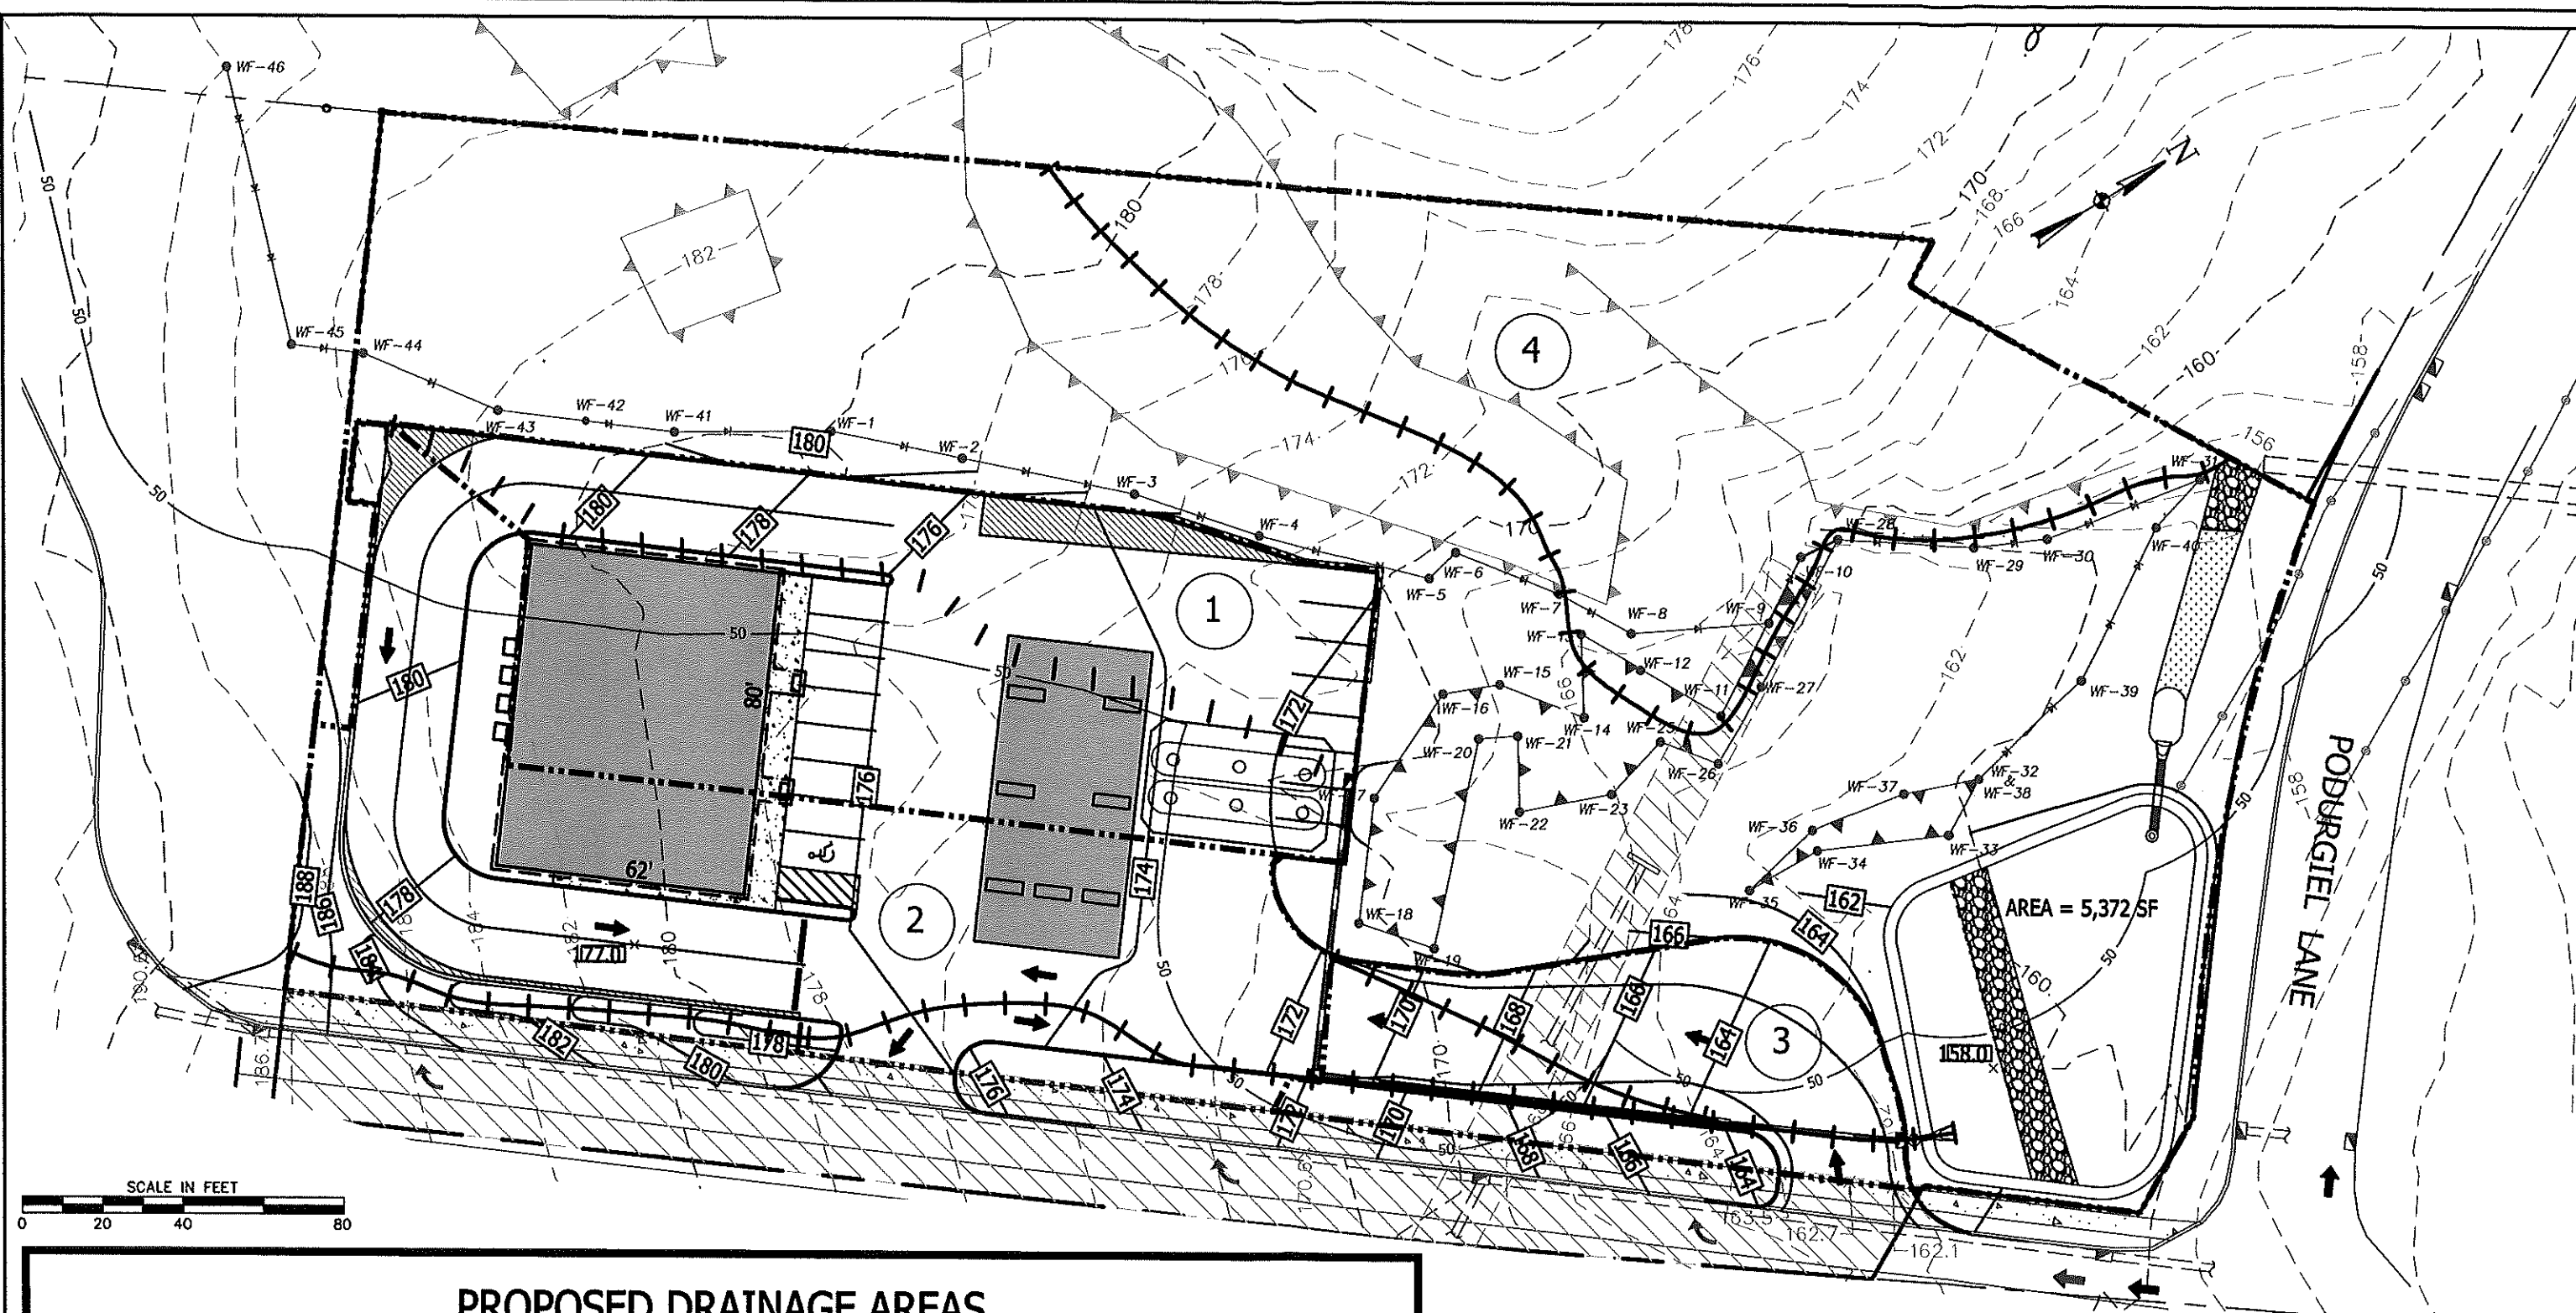

FEDUS ENGINEERING, LLC
CIVIL ENGINEERS
Mailing Address: 47 Wall Street, New Canaan, Connecticut 06855
Office: (860) 336-1644

PROFESSIONAL ENGINEER
NO. 21231
GREGG T. FEDUS

Gregg T. Fedus P.E. CT. License No. 21231

Proposed Drainage Map
of
2040 New London Turnpike
Uncansville, CT
Prepared For:
AMER CHOUDREY
October 3, 2022

Scale: 1"=40' JOB NO. 21-001048

Sheet
1 of 1