ALL CONSTRUCTION ACTIVITIES INVOLVING THE REMOVAL OR DISTURBANCE OF SOILS ARE TO BE PROVIDED WITH APPROPRIATE PROTECTIVE MEASURES TO MINIMIZE EROSION AND CONTAIN SEDIMENT DISPOSITION WITHIN THE AREA UNDER DEVELOPMENT. THE MINIMUM STANDARD FOR INDIVIDUAL MEASURES SHALL BE THOSE OUTLINED IN THE "CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENTATION CONTROL" 2002 EDITION AS AMENDED TO DATE. THOSE METHODS DEEMED MOST EFFECTIVE FOR THIS PROJECT ARE DESCRIBED HEREIN.

THE DIRECTIVES WITHIN THESE NOTES ARE GENERALIZED IN NATURE AND SOME MEASURES MAY NOT BE APPLICABLE TO THE SPECIFIC REQUIREMENTS OF THIS PROJECT. SEE THE OVERALL SOIL EROSION AND SEDIMENTATION CONTROL PLAN FOR THE SPECIFIC MEASURES

### **CONSTRUCTION SCHEDULE**

THE ANTICIPATED STARTING DATE FOR CONSTRUCTION IS SPRING/SUMMER 2025 WITH COMPLETION ANTICIPATED BY DECEMBER 2026. APPROPRIATE EROSION CONTROL MEASURES AS DESCRIBED HEREIN, SHALL BE INSTALLED BY THE CONTRACTOR PRIOR TO THE COMMENCEMENT OF ALL SITE CLEARING OR CONSTRUCTION ACTIVITY. SCHEDULE WORK TO MINIMIZE THE LENGTH OF TIME THAT BARE SOIL WILL BE EXPOSED CONSTRUCTION SEQUENCE

- . INSTALLATION OF SEDIMENT AND EROSION CONTROLS AND SEDIMENT BASIN. (PHASING WILL DICTATE SPECIFIC MEASURES AS REQUIRED)
- 2. CLEARING AND GRUBBING OPERATIONS
- 3. INSTALLATION OF DIVERSION BERMS AND SEDIMENT BASIN
- 4. STRIPPING AND STOCKPILING OF TOPSOIL
- 5. REMOVAL OF SEDIMENT BASIN AND INSTALLATION OF LEVEL SPREADER
- 6. FINAL FILL OPERATIONS IF SUBSOIL IMPORT IS REQUIRED
- 7. FOUNDATION / BUILDING CONSTRUCTION
- 8. INSTALLATION OF SITE UTILITIES
- 9. INSTALLATION OF PAVEMENTS AND CURBING
- 10. INSTALLATION OF LANDSCAPE AND LIGHTING
- 11. SITE STABILIZATION
- 12. REMOVAL OF SEDIMENT AND EROSION CONTROLS AFTER APPROVAL BY THE MUNICIPALITY.

### **CONTINGENCY EROSION PLAN**

THE CONTRACTOR SHALL INSTALL ALL SPECIFIED EROSION CONTROL MEASURES AND WILL BE REQUIRED TO MAINTAIN THEM IN THEIR INTENDED FUNCTIONING CONDITION. THE AGENTS OF THE MUNICIPALITY, INLAND WETLANDS COMMISSION AND/OR PROJECT ENGINEER SHALL HAVE THE AUTHORITY TO REQUIRE SUPPLEMENTAL MAINTENANCE OR ADDITIONAL MEASURES IF FIELD CONDITIONS ARE ENCOUNTERED BEYOND WHAT WOULD NORMALLY BE ANTICIPATED.

### **OPERATION REQUIREMENTS**

CLEARING AND GRUBBING OPERATIONS

- 1. ALL SEDIMENTATION AND EROSION CONTROL MEASURES, INCLUDING THE CONSTRUCTION OF TEMPORARY SEDIMENTATION TRAPS WILL BE INSTALLED PRIOR TO THE START OF CLEARING AND GRUBBING OPERATIONS.
- 2. FOLLOWING INSTALLATION OF ALL SEDIMENTATION AND EROSION CONTROL MEASURES, THE CONTRACTOR SHALL NOT PROCEED WITH GRADING, FILLING OR OTHER CONSTRUCTION OPERATIONS UNTIL THE ENGINEER HAS INSPECTED AND APPROVED ALL INSTALLATIONS.
- 3. THE CONTRACTOR SHALL TAKE EXTREME CARE DURING CLEARING AND GRUBBING OPERATIONS SO AS NOT TO DISTURB UNPROTECTED WETLAND AREAS OR SEDIMENTATION AND EROSION CONTROL DEVICES.
- 4. FOLLOWING THE COMPLETION OF CLEARING AND GRUBBING OPERATIONS, ALL AREAS SHALL BE STABILIZED WITH TOPSOIL AND SEEDING OR PROCESSED AGGREGATE STONE AS SOON AS PRACTICAL.

# ROUGH GRADING OPERATIONS

1. DURING THE REMOVAL AND/OR PLACEMENT OF EARTH AS INDICATED ON THE GRADING PLAN, TOPSOIL SHALL BE STRIPPED AND APPROPRIATELY STOCKPILED

2. ALL STOCKPILED TOPSOIL SHALL BE SEEDED, MULCHED WITH HAY, AND ENCLOSED BY A SILTATION FENCE.

1. PRIOR TO FILLING, ALL SEDIMENTATION AND EROSION CONTROL DEVICES SHALL BE PROPERLY IMPLEMENTED, MAINTAINED AND FULLY INSTALLED, AS DIRECTED BY THE ENGINEER AND AS SHOWN ON THIS PLAN.

2. AS GENERAL GRADING OPERATIONS PROGRESS, ANY TEMPORARY DIVERSION DITCHES SHALL BE RAISED OR LOWERED, AS NECESSARY, TO DIVERT SURFACE RUNOFF TO THE SEDIMENT BASINS.

# FINAL GRADING AND PAVING OPERATIONS

- 1. NO CUT OR FILL SLOPES SHALL EXCEED 2:1 EXCEPT WHERE STABILIZED BY ROCK FACED EMBANKMENTS OR EROSION CONTROL BLANKETS. JUTE MESH AND VEGETATION. ALL SLOPES SHALL BE SEEDED, AND ANY ROAD OR DRIVEWAY SHOULDER AND BANKS SHALL BE STABILIZED IMMEDIATELY UPON COMPLETION OF FINAL GRADING UNTIL TURF IS ESTABLISHED.
- 2. PAVEMENT SUB-BASE AND BASE COURSES SHALL BE INSTALLED OVER AREAS TO BE PAVED AS SOON AS FINAL SUB-GRADES ARE ESTABLISHED AND UNDERGROUND UTILITIES AND STORM DRAINAGE SYSTEMS HAVE BEEN INSTALLED.
- 3. AFTER CONSTRUCTION OF PAVEMENT, TOPSOIL, FINAL SEED, MULCH AND LANDSCAPING, REMOVE ALL TEMPORARY EROSION CONTROL DEVICES ONLY AFTER ALL AREAS HAVE BEEN PAVED AND/OR GRASS HAS BEEN WELL ESTABLISHED AND THE SITE HAS BEEN INSPECTED AND APPROVED BY THE MUNICIPALITY. EASTERN CONNECTICUT SOILS CONSERVATION DISTRICT, INLAND WETLANDS COMMISSION.

# INSTALLATION OF SEDIMENTATION AND

- **EROSION CONTROL MEASURES**
- A. DIG A SIX INCH TRENCH ON THE UPHILL SIDE OF THE DESIGNATED FENCE LINE
- B. POSITION THE POST AT THE BACK OF THE TRENCH (DOWNHILL SIDE), AND HAMMER THE POST AT LEAST 1.5 FEET INTO THE GROUND.
- C. LAY THE BOTTOM SIX INCHES OF THE FABRIC INTO THE TRENCH TO PREVENT
- UNDERMINING BY STORM WATER RUN-OFF.
- D. BACKFILL THE TRENCH AND COMPACT.
- II ANTI-TRACKING APRON (CONSTRUCTION ENTRANCE)
- A. CLEAR THE ENTRANCE OF ALL VEGETATION, ROOTS AND OTHER OBJECTIONABLE MATERIAL
- B. INSTALL SUBSURFACE DRAINAGE AT POORLY DRAINED AREAS.
- C. INSTALL GEOTEXTILE IN A DIRECTION PARALLEL TO THE ENTRANCE D. PLACE STONE IN THE SPECIFIED DIMENSIONS AND THICKNESS AS DETAILED. E. IF ENTRANCE EXCEEDS 2% GRADIENT, CONSTRUCT A WATER BAR WITHIN THE

# III HAY BALE BARRIER

A. EXCAVATE TRENCH AS WIDE AS THE BALES AND AT LEAST 4 INCHES DEEP. B. WING EACH END OF TRENCH UPSLOPE SO THE BOTTOM OF LAST BALE IS HIGHER THAN THE LOWEST BALE IN THE BARRIER.

CONSTRUCTION ENTRANCE AT A MINIMUM INTERVAL OF 15 FEET.

- C. PLACE BALES IN A SINGLE ROW LENGTHWISE WITH ENDS BUTTED TIGHTLY. D. ANCHOR BALES WITH AT LEAST TWO STAKES DRIVEN 18 INCHES MINIMUM INTO THE GROUND
- E. BACKFILL BALES WITH EXCAVATED MATERIAL TO A MINIMUM DEPTH OF 4 INCHES ON THE UPHILL SIDE OF THE BALE.

# IV SILT SACK

- A. REMOVE GRATE FROM DRAINAGE STRUCTURE.
- B. INSTALL SILT SACK PER MANUFACTURERS RECOMMENDATIONS. C. INSPECT PERIODICALLY AND REMOVE ACCUMULATED MATERIALS AS NEEDED.
- V DIVERSION BERMS
- A. REMOVE ALL TREES, BRUSH, STUMPS, OBSTRUCTIONS, AND OTHER

- OBJECTIONABLE MATERIAL B. EXCAVATE OR SHAPE TO THE LINE, GRADE, AND CROSS SECTION AS DETAILED
- ON THE PLAN. C. FILL VOIDS TO PREVENT UNEQUAL SETTLEMENT.

### VI SEDIMENT TRAPS

D. STABILIZE AS DETAILED.

- A. CLEAR, GRUB, AND STRIP ANY VEGETATION AND ROOT MAT FROM ANY
- PROPOSED EMBANKMENT AND OUTLET AREA. B. REMOVE STONES AND ROCKS WITH A DIAMETER GREATER THAN 3 INCHES. C. EXCAVATE WET STORAGE AND CONSTRUCT EMBANKMENT AND/OR OUTLET AS
- REQUIRED TO ATTAIN THE SPECIFIED STORAGE REQUIREMENTS. D. USE ONLY FILL MATERIALS FREE FROM EXCESSIVE ORGANICS, DEBRIS, LARGE
- ROCKS OVER 6 INCHES, OR OTHER UNSUITABLE MATERIALS. E. COMPACT 9 INCH LAYERS WITH CONSTRUCTION EQUIPMENT. F. STABILIZE EMBANKMENTS AS SPECIFIED.

- VII CONSTRUCTION DITCH A. CONSTRUCT DITCH TO HAVE AN UNINTERRUPTED POSITIVE GRADE TO AN
- B. DIVERTED RUNOFF FROM A DISTURBED AREA SHALL TERMINATE AT A SEDIMENT TRAPPING DEVICE.
- C. REMOVE ALL TREES, BRUSH, STUMPS, OBSTRUCTIONS OR OTHER OBJECTIONABLE MATERIAL WHICH IS IN CONFLICT WITH THE SWALE. D. EXCAVATE, SHAPE TO LINE, GRADE, AND CROSS-SECTION AS REQUIRED TO BE
- FREE OF BANK PROJECTIONS OR OTHER IRREGULARITIES WHICH WILL IMPEDE NORMAL FLOW. E. COMPACT FILLS BY EARTH MOVING EQUIPMENT.
- F. STABILIZE FLOW CHANNEL PER DETAIL. G. INSPECT PERIODICALLY AND MAINTAIN AS REQUIRED.

### VIII CHECK DAM

- A. PLACE STONE ON FILTER FABRIC FOUNDATION TO THE LINES, GRADES, AND LOCATIONS SHOWN ON THE PLANS.
- B. SET SPACING OF CHECK DAMS TO ASSUME THAT ELEVATIONS OF THE CREST OF THE DOWNSTREAM DAM IS AT THE SAME ELEVATION OF THE TOE OF THE
- UPSTREAM DAM. C. EXTEND THE STONE A MINIMUM OF 1.5 FEET BEYOND THE DITCH BANKS TO
- PREVENT CUTTING AROUND THE DAM. D. PROTECT THE CHANNEL DOWNSTREAM OF THE LOWEST CHECK DAM FROM
- SCOUR AND EROSION WITH STONE OR LINER AS APPROPRIATE. E. ENSURE THAT CHANNEL APPURTENANCES SUCH AS CULVERT ENTRANCES BELOW CHECK DAMS ARE NOT SUBJECT TO DAMAGE OR BLOCKAGE FROM DISPLACED STONE.

### IX EARTH DIKE

- A. COMPACT WITH EARTH-MOVING EQUIPMENT.
- B. CREATE WITH POSITIVE DRAINAGE TO AN OUTLET C. CONSTRUCT WITH WIDER TOP AND FLATTER SIDE SLOPES TO FACILITATE CROSSING WITH CONSTRUCTION EQUIPMENT.

# **OPERATION AND MAINTENANCE OF** SEDIMENTATION AND EROSION CONTROL

- **MEASURES** I. SILTATION FENCE
- A. ALL SILTATION FENCES SHALL BE INSPECTED AS A MINIMUM WEEKLY OR AFTER EACH RAINFALL ALL DETERIORATED FABRIC AND DAMAGED POSTS SHALL BE REPLACED AND PROPERLY REPOSITIONED IN ACCORDANCE WITH THIS PLAN.
- B. SEDIMENT DEPOSITS SHALL BE REMOVED FROM BEHIND THE FENCE WHEN THEY EXCEED A HEIGHT OF ONE FOOT.

- A. CONTRACTOR TO KEEP WEEKLY CHECKLIST LOGS FOR INSPECTIONS OF ALL SEDIMENT AND EROSION CONTROL DEVICES AND HAVE THEM READILY AVAILABLE ON-SITE AT ALL TIMES FOR INSPECTION BY CT DEEP, LOCAL AUTHORITIES OR
- B. ALL SEDIMENT BASINS SHALL BE INSPECTED FOLLOWING EACH RAINFALL. REPAIR OF SLOPES SHALL BE PROMPTLY MADE AS NEEDED, EROSION CONTROL BLANKETS MAY BE USED FOLLOWING REPAIR OF SLOPE AS DIRECTED BY THE ENGINEER. C. SEDIMENT DEPOSITS SHALL BE REMOVED FROM SEDIMENT BASINS AND/OR
- OTHERWISE INDICATED ON THE EROSION CONTROL PLANS AND DETAILS TO BE AT A SPECIFIC ELEVATION PER CLEAN OUT MARKERS. D. SEDIMENT SHALL BE DISPOSED OF ON-SITE OR AS DIRECTED BY THE ENGINEER AND LOCAL GOVERNING OFFICIALS. SEE SEDIMENT AND EROSION CONTROL NOTES HEREIN REGARDING DISPOSAL REQUIREMENTS FOR OFF SITE SPOIL

SEDIMENT TRAPS WHEN THEY EXCEED A HEIGHT OF ONE FOOT UNI ESS.

# III. CHECK DAMS

- A. ALL STONE CHECK DAMS SHALL BE INSPECTED FOLLOWING EACH RAINFALL. REPAIR OF STONE CHECK DAMS SHALL BE PROMPTLY MADE AND ACCUMULATED SEDIMENT REMOVED WHEN IT REACHES ONE HALF OF THE HEIGHT OF THE CHECK
- IV. TEMPORARY/PERMANENT DRAINAGE SWALES:
- A. SWALES SHALL BE INSPECTED FOLLOWING EACH RAINFALL. REPAIR OF ANY WASHED OUT OR ERODED SLOPES SHALL BE MADE PROMPTLY AND THE AREA SHALL BE RE-SEEDED AS NECESSARY
- B. EROSION CONTROL BLANKETS MAY BE USED TO REPAIR ERODED SWALES AS DIRECTED BY THE ENGINEER OR MUNICIPALITY AGENT. V. SILT SACKS
- A. MONITOR, MAINTAIN, REMOVE, OR REPLACE SILT SACK AS REQUIRED TO ASSURE FREE DRAINAGE INTO EXISTING DRYWELL. VI. ANTI-TRACKING APRONS
- A. MAINTAIN FUNCTIONALITY OF ANTI-TRACKING APRON THROUGHOUT THE CONSTRUCTION PERIOD
- B. REMOVE AND DISPOSE OF ACCUMULATED SEDIMENTS IMMEDIATELY IF THIS MEASURE SHOWS SIGNS NON-FUNCTIONALITY.

# **EROSION AND SEDIMENT CONTROL PLAN**

- SILTATION FENCE WILL BE INSTALLED AT ALL CULVERT OUTLETS IF CULVERT OUTLETS ARE APPLICABLE TO THIS PROJECT AND ALONG THE TOE OF ALL CRITICAL CUT AND FILL SLOPES.
- 2. CULVERT DISCHARGE AREAS WILL BE PROTECTED WITH RIP RAP CHANNELS; ENERGY DISSIPATERS WILL BE INSTALLED AS SHOWN ON THESE PLANS AND AS NECESSARY.
- 3. ALL EROSION AND SEDIMENT CONTROL MEASURES WILL BE INSTALLED IN ACCORDANCE WITH THE STANDARDS AND SPECIFICATIONS OF THE CONNECTICUT
- GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL MANUAL, LATEST EDITION. 4. EROSION AND SEDIMENT CONTROL MEASURES WILL BE INSTALLED PRIOR TO
- CONSTRUCTION WHENEVER POSSIBLE 5. ALL CONTROL MEASURES WILL BE MAINTAINED IN EFFECTIVE CONDITION
- THROUGHOUT THE CONSTRUCTION PERIOD. 6. ADDITIONAL CONTROL MEASURES WILL BE INSTALLED DURING THE CONSTRUCTION
- PERIOD, IF NECESSARY OR REQUIRED OR AS DIRECTED BY THE CIVIL ENGINEER OR BY LOCAL GOVERNING OFFICIALS. 7. SEDIMENT REMOVED FROM EROSION CONTROL STRUCTURES WILL BE DISPOSED IN A

### MANNER WHICH IS CONSISTENT WITH THE INTENT AND REQUIREMENTS OF THE EROSION CONTROL PLANS, NOTES, AND DETAILS.

SEDIMENT AND EROSION CONTROL NOTES

- 1. THE OWNER IS RESPONSIBLE FOR IMPLEMENTING THIS SEDIMENT AND EROSION CONTROL PLAN. THIS RESPONSIBILITY INCLUDES THE PROPER INSTALLATION AND MAINTENANCE OF EROSION CONTROL MEASURES, INFORMING ALL PARTIES ENGAGED WITH CONSTRUCTION ON THE SITE OF THE REQUIREMENTS AND OBJECTIVES OF THIS PLAN, INFORMING THE GOVERNING AUTHORITY OR INLAND WETLANDS AGENCY OF ANY TRANSFER OF THIS RESPONSIBILITY, AND FOR CONVEYING A COPY OF THE SEDIMENT & EROSION CONTROL PLAN IF THE TITLE TO THE LAND IS TRANSFERRED
- AN EROSION CONTROL BOND MAY BE REQUIRED TO BE POSTED WITH THE MUNICIPALITY TO ENSURE IMPLEMENTATION OF THE EROSION CONTROL MEASURES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE POSTING OF THIS BOND AND FOR INQUIRIES TO THE MUNICIPALITY FOR INFORMATION ON THE METHOD, TYPE AND AMOUNT OF THE BOND POSTING UNLESS OTHERWISE DIRECTED BY THE OWNER.
- VISUAL SITE INSPECTIONS SHALL BE CONDUCTED WEEKLY, AND AFTER EACH MEASURABLE PRECIPITATION EVENT OF 0.10 INCHES OR GREATER BY QUALIFIED PERSONNEL, TRAINED AND EXPERIENCED IN EROSION AND SEDIMENT CONTROL, TO ASCERTAIN THAT THE EROSION AND SEDIMENT CONTROL (E&S) BMPS ARE OPERATIONAL AND EFFECTIVE IN PREVENTING POLLUTION. A WRITTEN REPORT OF

### EACH INSPECTION SHALL BE KEPT, AND INCLUDE:

DURING CONSTRUCTION.

- A) A SUMMARY OF THE SITE CONDITIONS, E&S BMPS, AND COMPLIANCE; AND
- B) THE DATE, TIME, AND THE NAME OF THE PERSON CONDUCTING THE INSPECTION 4. THE CONTRACTOR SHALL CONSTRUCT ALL SEDIMENT AND EROSION CONTROLS IN ACCORDANCE WITH THE CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL, PREPARED BY CTDEEP, LATEST EDITION IN ACCORDANCE WITH THE CONTRACT DOCUMENTS, AND AS DIRECTED BY THE MUNICIPALITY. THE CONTRACTOR SHALL KEEP A COPY OF THE GUIDELINES ON-SITE FOR REFERENCE
- ADDITIONAL AND/OR ALTERNATIVE SEDIMENT AND EROSION CONTROL MEASURES MAY BE INSTALLED DURING THE CONSTRUCTION PERIOD IF FOUND NECESSARY BY THE CONTRACTOR, OWNER, CIVIL ENGINEER, THE MUNICIPALITY, EASTERN CONNECTICUT SOILS CONSERVATION DISTRICT, INLAND WETLANDS COMMISSION, OR GOVERNING AGENCIES. THE CONTRACTOR SHALL CONTACT THE OWNER AND APPROPRIATE GOVERNING AGENCIES FOR APPROVAL IF ALTERNATIVE CONTROLS OTHER THAN THOSE SHOWN ON THE PLANS ARE PROPOSED.
- 6. THE CONTRACTOR SHALL INSPECT ALL SEDIMENT AND EROSION CONTROLS BEFORE AND AFTER EACH STORM (0.10 INCHES OR GREATER RAINFALL), OR AT LEAST WEEKLY, TO VERIFY THAT THE CONTROLS ARE OPERATING PROPERLY AND MAKE REPAIRS WHERE NECESSARY.
- 7. THE CONTRACTOR SHALL KEEP A SUPPLY OF EROSION CONTROL MATERIAL (HAY BALES, SILT FENCE, JUTE MESH, RIP RAP ETC.) ON-SITE FOR MAINTENANCE AND
- 8. INSTALL PERIMETER SEDIMENT CONTROLS PRIOR TO CLEARING OR CONSTRUCTION. ALL CONSTRUCTION SHALL BE CONTAINED WITHIN THE LIMIT OF DISTURBANCE (LOD), WHICH SHALL BE MARKED WITH SILT FENCE, SAFETY FENCE, HAY BALES, RIBBONS, OR OTHER MEANS PRIOR TO CLEARING. CONSTRUCTION ACTIVITY SHALL REMAIN ON THE UPHILL SIDE OF THE SILT FENCE UNLESS WORK IS SPECIFICALLY CALLED FOR ON THE DOWNHILL SIDE OF THE FENCE.
- 9. TOPSOIL SHALL BE STRIPPED AND STOCKPILED FOR USE IN FINAL LANDSCAPING. ALL EARTH STOCKPILES SHALL HAVE HAY BALES OR SILT FENCE AROUND THE LIMIT OF PILE. PILES SHALL BE TEMPORARILY SEEDED IF PILE IS TO REMAIN IN PLACE
- 10. SEDIMENTATION TRAPS SHALL PROVIDE 134 CUBIC YARDS OF SEDIMENT STORAGE PER DISTURBED ACRE CONTRIBUTING TO THE TRAP. PROVIDE TRAP VOLUMES FOR ALL DISTURBANCE ON SITE IF SPECIFIED.
- 11. MINIMIZE LAND DISTURBANCES. SEED AND MULCH DISTURBED AREAS WITH TEMPORARY MIX AS SOON AS PRACTICABLE (2 WEEK MAXIMUM UNSTABILIZED PERIOD) USING PERENNIAL RYEGRASS AT 40 LBS PER ACRE. MULCH ALL CUT AND FILL SLOPES AND SWALES WITH LOOSE HAY AT A RATE OF 2 TONS PER ACRE. IF NECESSARY. REPLACE LOOSE HAY ON SLOPES WITH EROSION CONTROL BLANKETS OR JUTE CLOTH. MODERATELY GRADED AREAS, ISLANDS, AND TEMPORARY CONSTRUCTION STAGING AREAS MAY BE HYDROSEEDED WITH TACKIFIER.
- 12. EXCAVATED MATERIAL FROM TEMPORARY SILT TRAPS MUST BE STOCKPILED ON UPHILL SIDE OF SILT FENCE.
- 13. INSTALL SILT FENCE ACCORDING TO MANUFACTURER'S INSTRUCTION, PARTICULARLY, BURY LOWER EDGE OF FABRIC INTO GROUND PRIOR TO ANY WORK IN UPLAND AREAS. SILT FENCE SHALL BE MIRAFI ENVIROFENCE, AMOCO SILT STOP OR EQUIVALENT APPROVED BY THE CIVIL ENGINEER. FILTER FABRIC USED SHALL BE MIRAFI 100X OR EQUIVALENT. SEE SPECIFICATIONS FOR FURTHER INFORMATION.
- 14. WHERE INDICATED ON EROSION CONTROL PLANS USE NEW HAY BALES AND REPLACE THEM WHENEVER THEIR CONDITION DETERIORATES BEYOND REASONABLE USABILITY. STAKE HAY BALES SECURELY INTO GROUND AND BUTT TIGHTLY TOGETHER TO PREVENT UNDERCUTTING AND BYPASSING.
- 15. INSTALL TEMPORARY DIVERSION DITCHES, PLUNGE POOLS, SEDIMENT TRAPS, AND DEWATERING PITS AS SHOWN AND AS NECESSARY DURING VARIOUS PHASES OF CONSTRUCTION TO CONTROL RUNOFF UNTIL UPHILL AREAS ARE STABILIZED. LOCATION OF TEMPORARY SEDIMENT TRAPS WILL REQUIRE REVIEW AND APPROVAL BY THE CIVIL ENGINEER AND GOVERNING OFFICIAL.
- 16. BLOCK THE OPEN UPSTREAM ENDS OF DETENTION BASIN/SEDIMENTATION BASIN OUTLET CONTROL ORIFICE UNTIL SITE IS STABILIZED. CONVERT TEMPORARY SEDIMENT BASINS TO PERMANENT DETENTION BASINS ONCE SITE HAS BEEN STABILIZED. CLEAN OUTLET CONTROL STRUCTURES AS NECESSARY AND REMOVE ACCUMULATED SEDIMENT FROM BOTTOM OF BASIN. BLOCK END OF STORM SEWERS IN EXPOSED TRENCHES WITH BOARDS AND SANDBAGS AT THE END OF EACH WORKING DAY WHEN RAIN IS EXPECTED.
- 17. SWEEP AFFECTED PORTIONS OF OFF SITE ROADS ONE OR MORE TIMES A DAY (OR LESS FREQUENTLY IF TRACKING IS NOT A PROBLEM) DURING CONSTRUCTION. OTHER DUST CONTROL MEASURES TO BE USED AS NECESSARY INCLUDE WATERING DOWN DISTURBED AREAS, USING CALCIUM CHLORIDE, AND COVERING LOADS ON DUMP TRUCKS. 18. PERIODICALLY CHECK ACCUMULATED SEDIMENT LEVELS IN THE SEDIMENT TRAPS
- WHEN ONE FOOT OF SEDIMENT HAS ACCUMULATED OR PER SPECIFIC CLEANOUT MARKER ELEVATION. REMOVE ACCUMULATED SEDIMENT FROM BEHIND SILT FENCE WHEN LEVEL REACHES HALF THE HEIGHT OF THE HAY BALE OR ONE FOOT AT SILT FENCE. DISPOSE OF SEDIMENT LEGALLY EITHER ON OR OFF SITE.

19. IMMEDIATELY UPON DISCOVERING UNFORESEEN CIRCUMSTANCES POSING THE POTENTIAL FOR ACCELERATED EROSION AND/OR SEDIMENT POLLUTION, THE

OPERATOR SHALL IMPLEMENT APPROPRIATE BEST MANAGEMENT PRACTICES (BMP)

TO ELIMINATE THE POTENTIAL FOR ACCELERATED EROSION AND/OR SEDIMENT

- POLLUTION. 20. ALL EXCAVATED MATERIAL SHALL BE PLACED ON THE HIGH SIDE OF UTILITY AND STORM PIPE TRENCHES SO AS TO ALLOW THE TRENCH TO INTERCEPT ALL SILT
- 21. AN AREA SHALL BE CONSIDERED TO HAVE ACHIEVED FINAL STABILIZATION WHEN IT HAS A MINIMUM OF 70% UNIFORM PERENNIAL VEGETATIVE COVER OR OTHER PERMANENT NON-VEGETATIVE COVER WITH A DENSITY SUFFICIENT TO RESIST ACCELERATED SURFACE EROSION AND SUBSURFACE CHARACTERISTICS
- SUFFICIENT TO RESIST SLIDING OR OTHER MOVEMENTS. 22. MAINTAIN ALL PERMANENT AND TEMPORARY SEDIMENT CONTROL DEVICES IN EFFECTIVE CONDITION THROUGHOUT THE CONSTRUCTION PERIOD, UPON COMPLETION OF WORK SWEEP PARKING LOT AND REMOVE ALL TEMPORARY SEDIMENT CONTROLS WHEN AUTHORIZED BY LOCAL GOVERNING AUTHORITY. FILE NOT (NOTICE OF TERMINATION) WITH GOVERNING AUTHORITY RESPONSIBLE FOR REGULATING STORM WATER DISCHARGES FROM CONSTRUCTION ACTIVITIES PER

1. SET POSTS AND

DEPTH

COMPACTED

DRAINAGE WAY

PLAN VIEW

BACKFILL

EXCAVATE A 6"x6"

TRENCH, SET


DOWNSLOPE.


POST

UPSLOPE FOR

STABILITY AND

SELF CLEANING

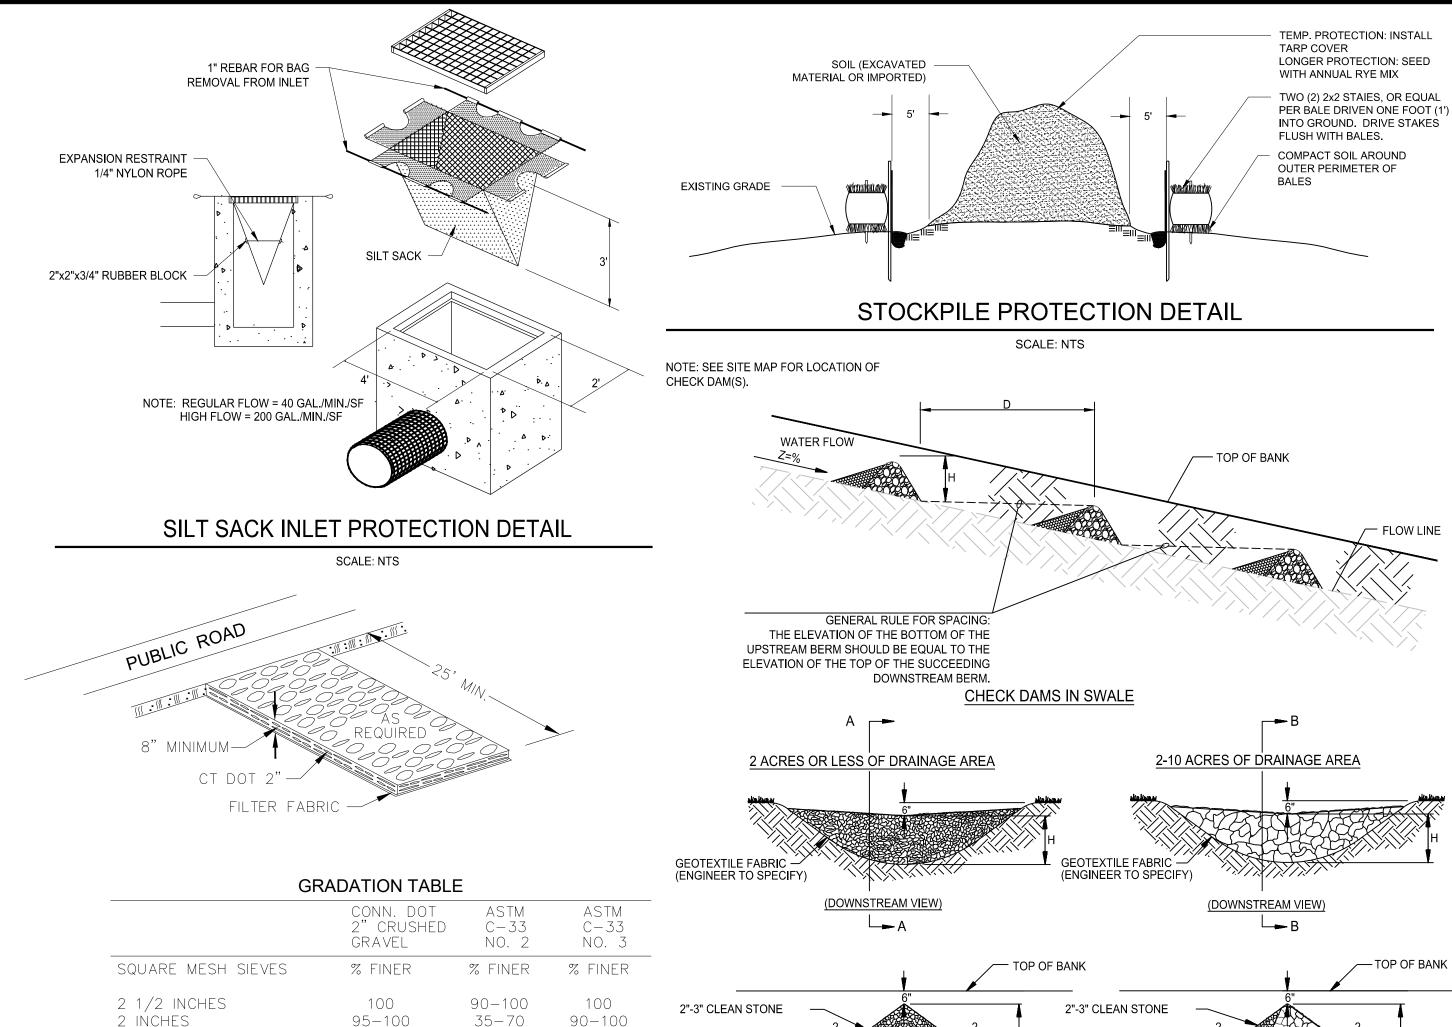

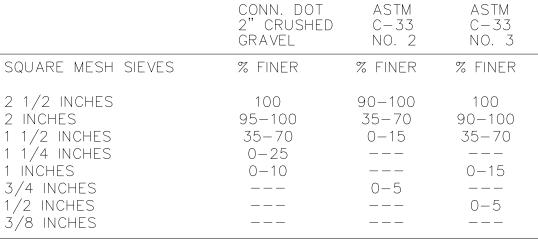

SOURCE: U.S. DEPARTMENT OF AGRICULTURE, SOIL CONSERVATION SERVICE,

STORRS, CONNECTICUT.

TYP ANTI TRACKING APRON DETAIL

2. ATTACH FILTER FABRIC

TO THE POSTS AND

EXTEND IT TO THE

**TRENCH** 

EXCAVATED SOIL. WHEREVER SILT FENCE RUNS ACROSS


INTERVALS OF 50-FEET.

OR PERPENDICULAR TO SURFACE


BE PROVIDED AT APPROXIMATE


CONTOURS, 10-FOOT LONG WINGS OF


THE MAIN RUN OF SILT FENCE SHOULD

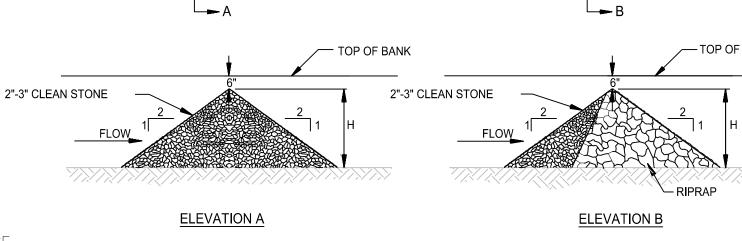

STONE CHECK DAM DETAIL

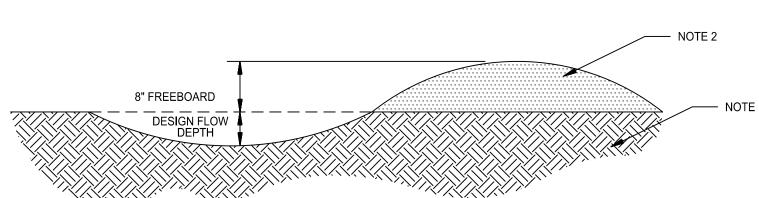

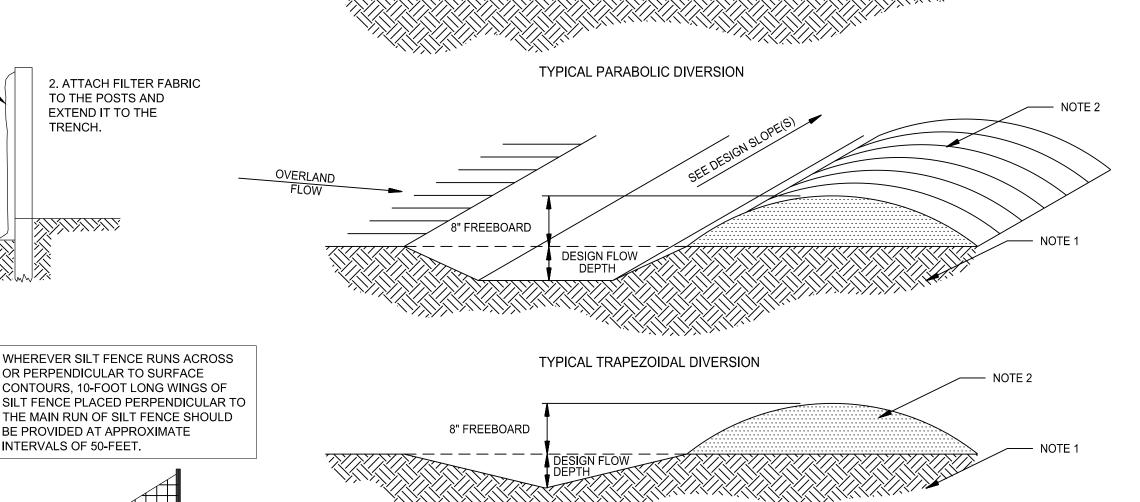

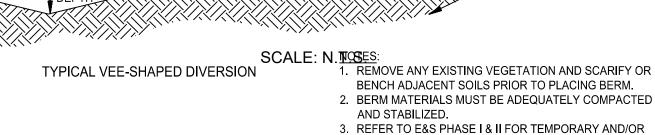

FINAL STABILIZATION MEASURES. 4. BERM SHALL NOT BE CONSTRUCTED OF TOPSOIL. **DIVERSION BERM DETAIL** 

APPROVED BY THE MONTVILLE INLAND WETLAND COMMISSION PPROVED BY THE MONTVILLE PLANNING AND ZONING COMMISSION

THIS DRAWING IS THE PROPERTY OF HE ENGINEER. IT HAS BEEN SPECIFICALLY PREPARED FOR THE OWNER FOR THIS PROJECT AT THIS SIT AND IS NOT TO BE USED FOR ANY OTHER PURPOSE, LOCATION, OR OWNER WITHOUT WRITTEN CONSENT OF THE ENGINEER.



 $\mathbf{C}$  $\triangleleft$ TOWNHOUS
18 POWERHOUMONTVILLE, CO 6 **MADIS** 

Job Number: FE24-1889

Job Start Date:

3/20/24

Drawn By: Checked By

Sheet Title: TEMPORARY **SOIL EROSION &** SEDIMENT **CONTROL NOTES** & DETAILS

Sheet Number:

SCALE: NTS

SILT FENCE PROTECTION DETAIL

3. BACKFILL THE

TRENCH AND


COMPACT THE


ELEVATION

THAN POINT "B"

POINTS "A" SHOULD BE HIGHER

EXPIRATION DATE EC PLAN APPROVAL DATE

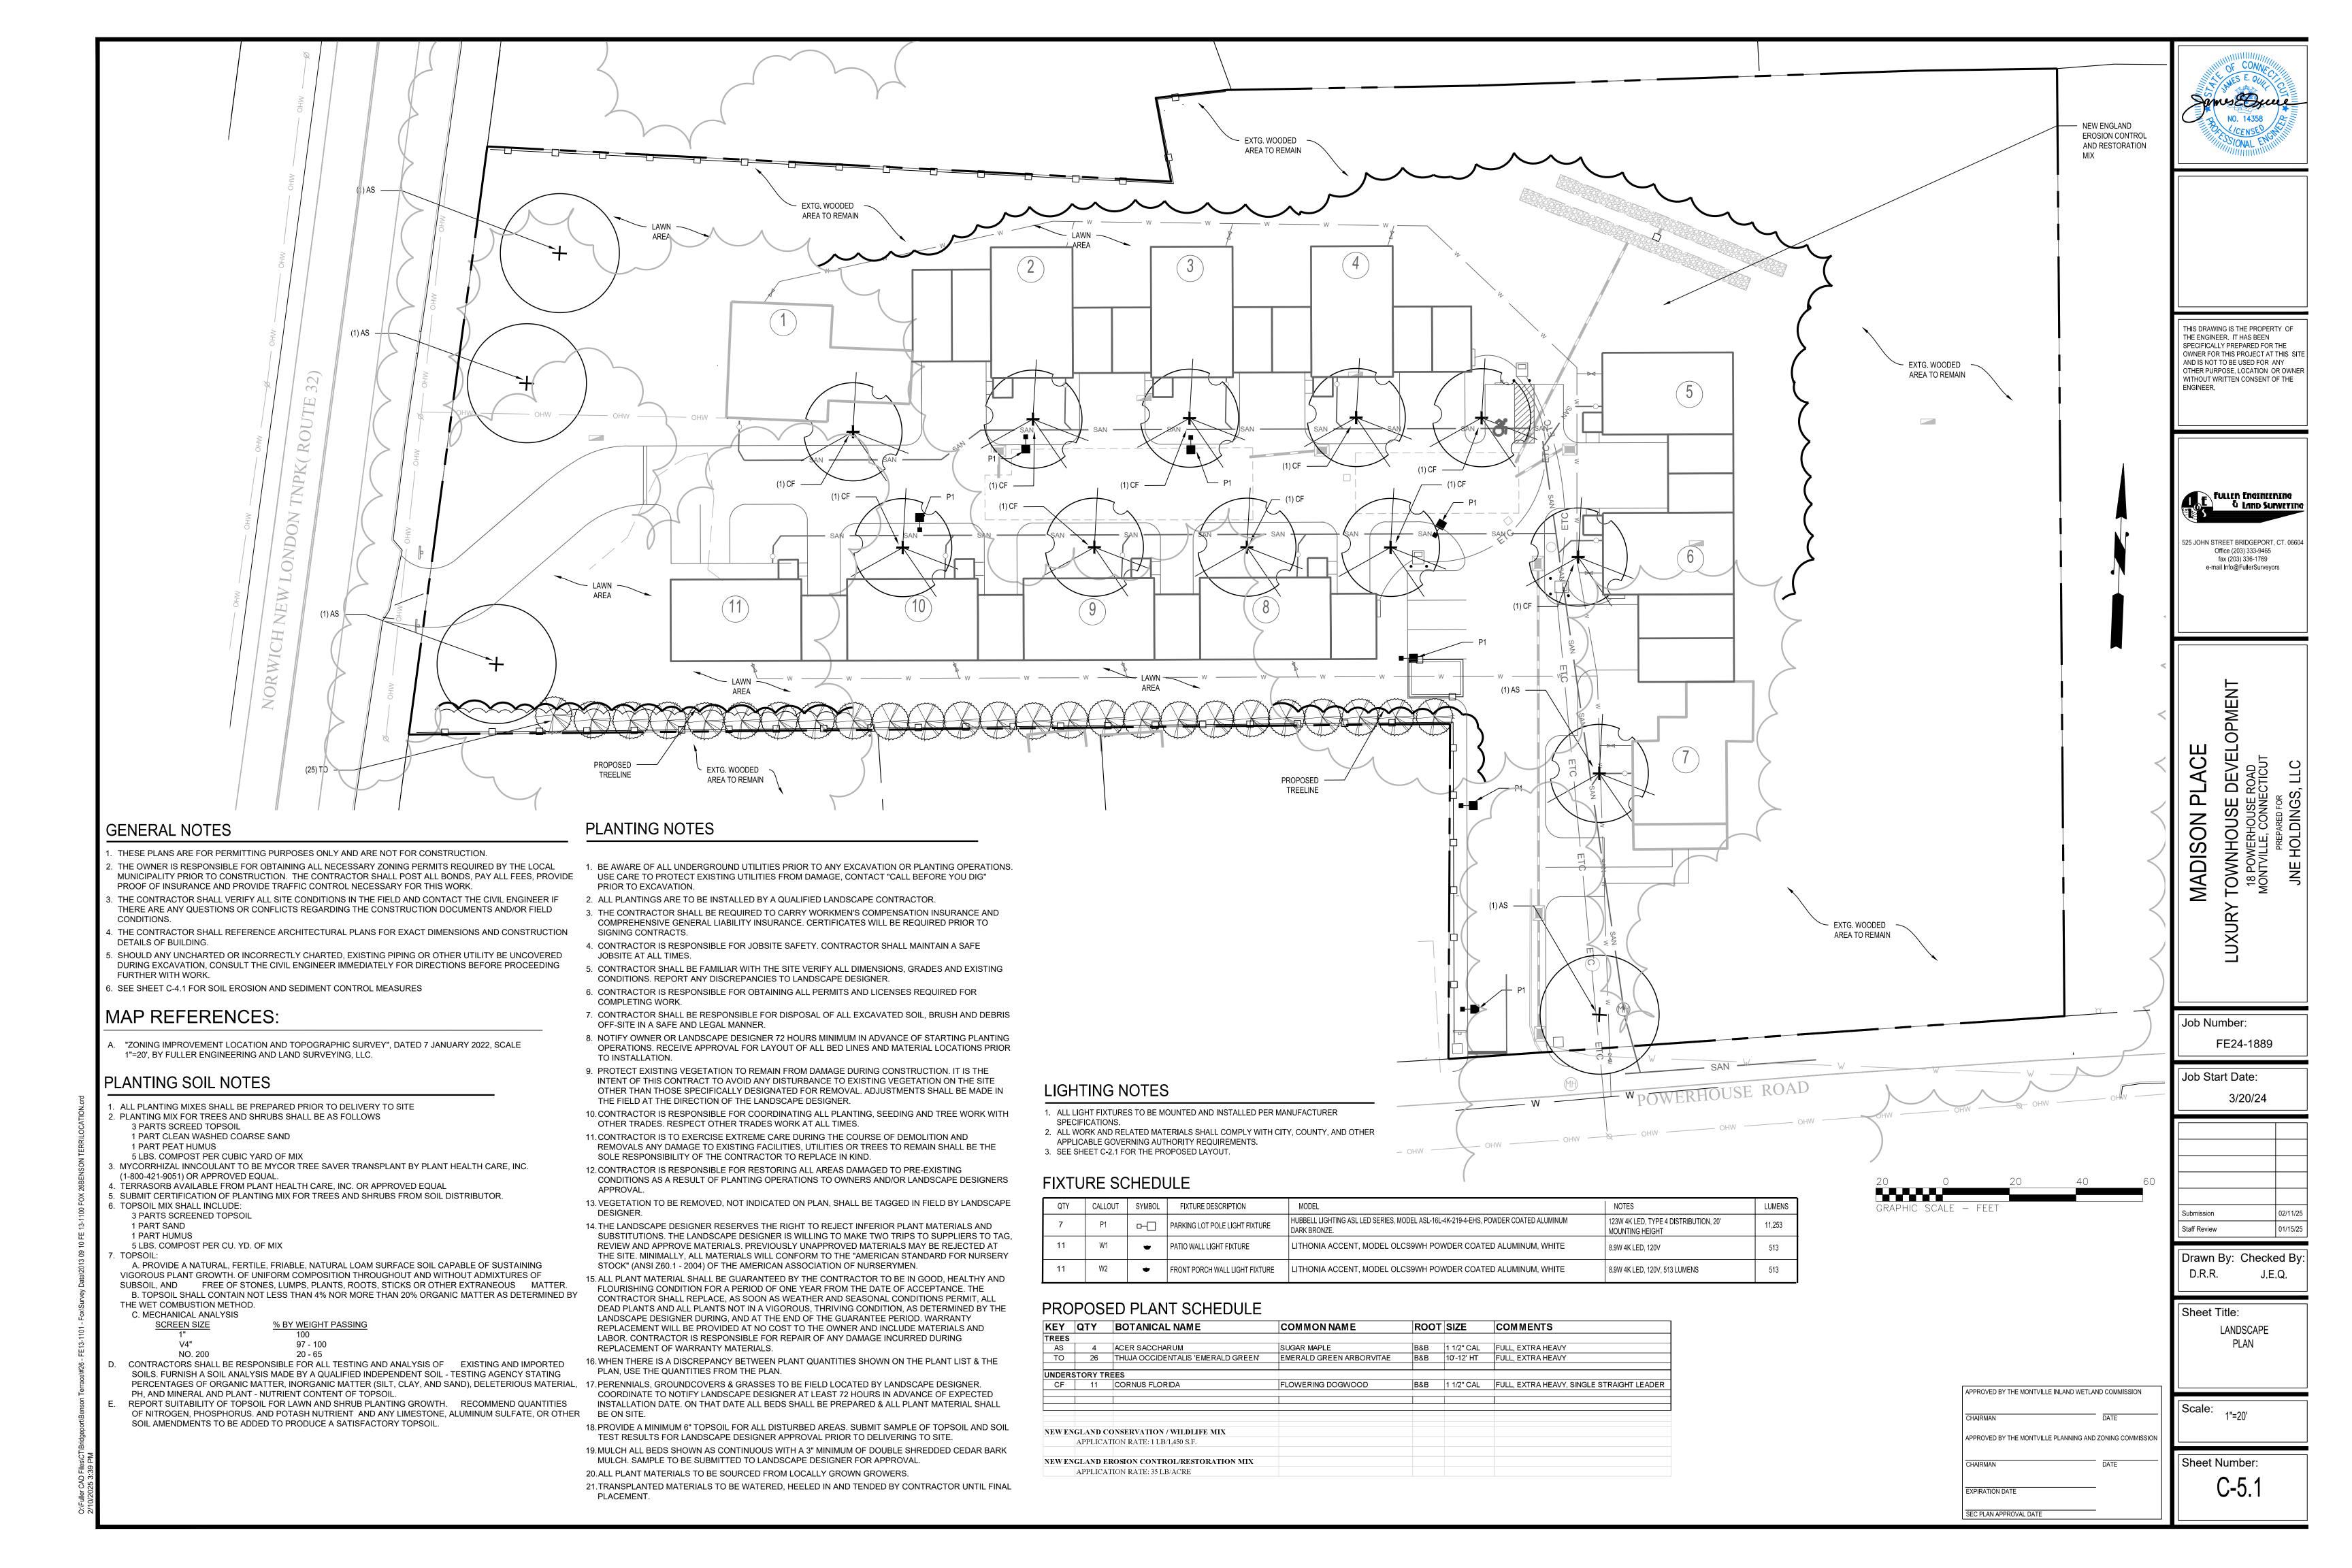

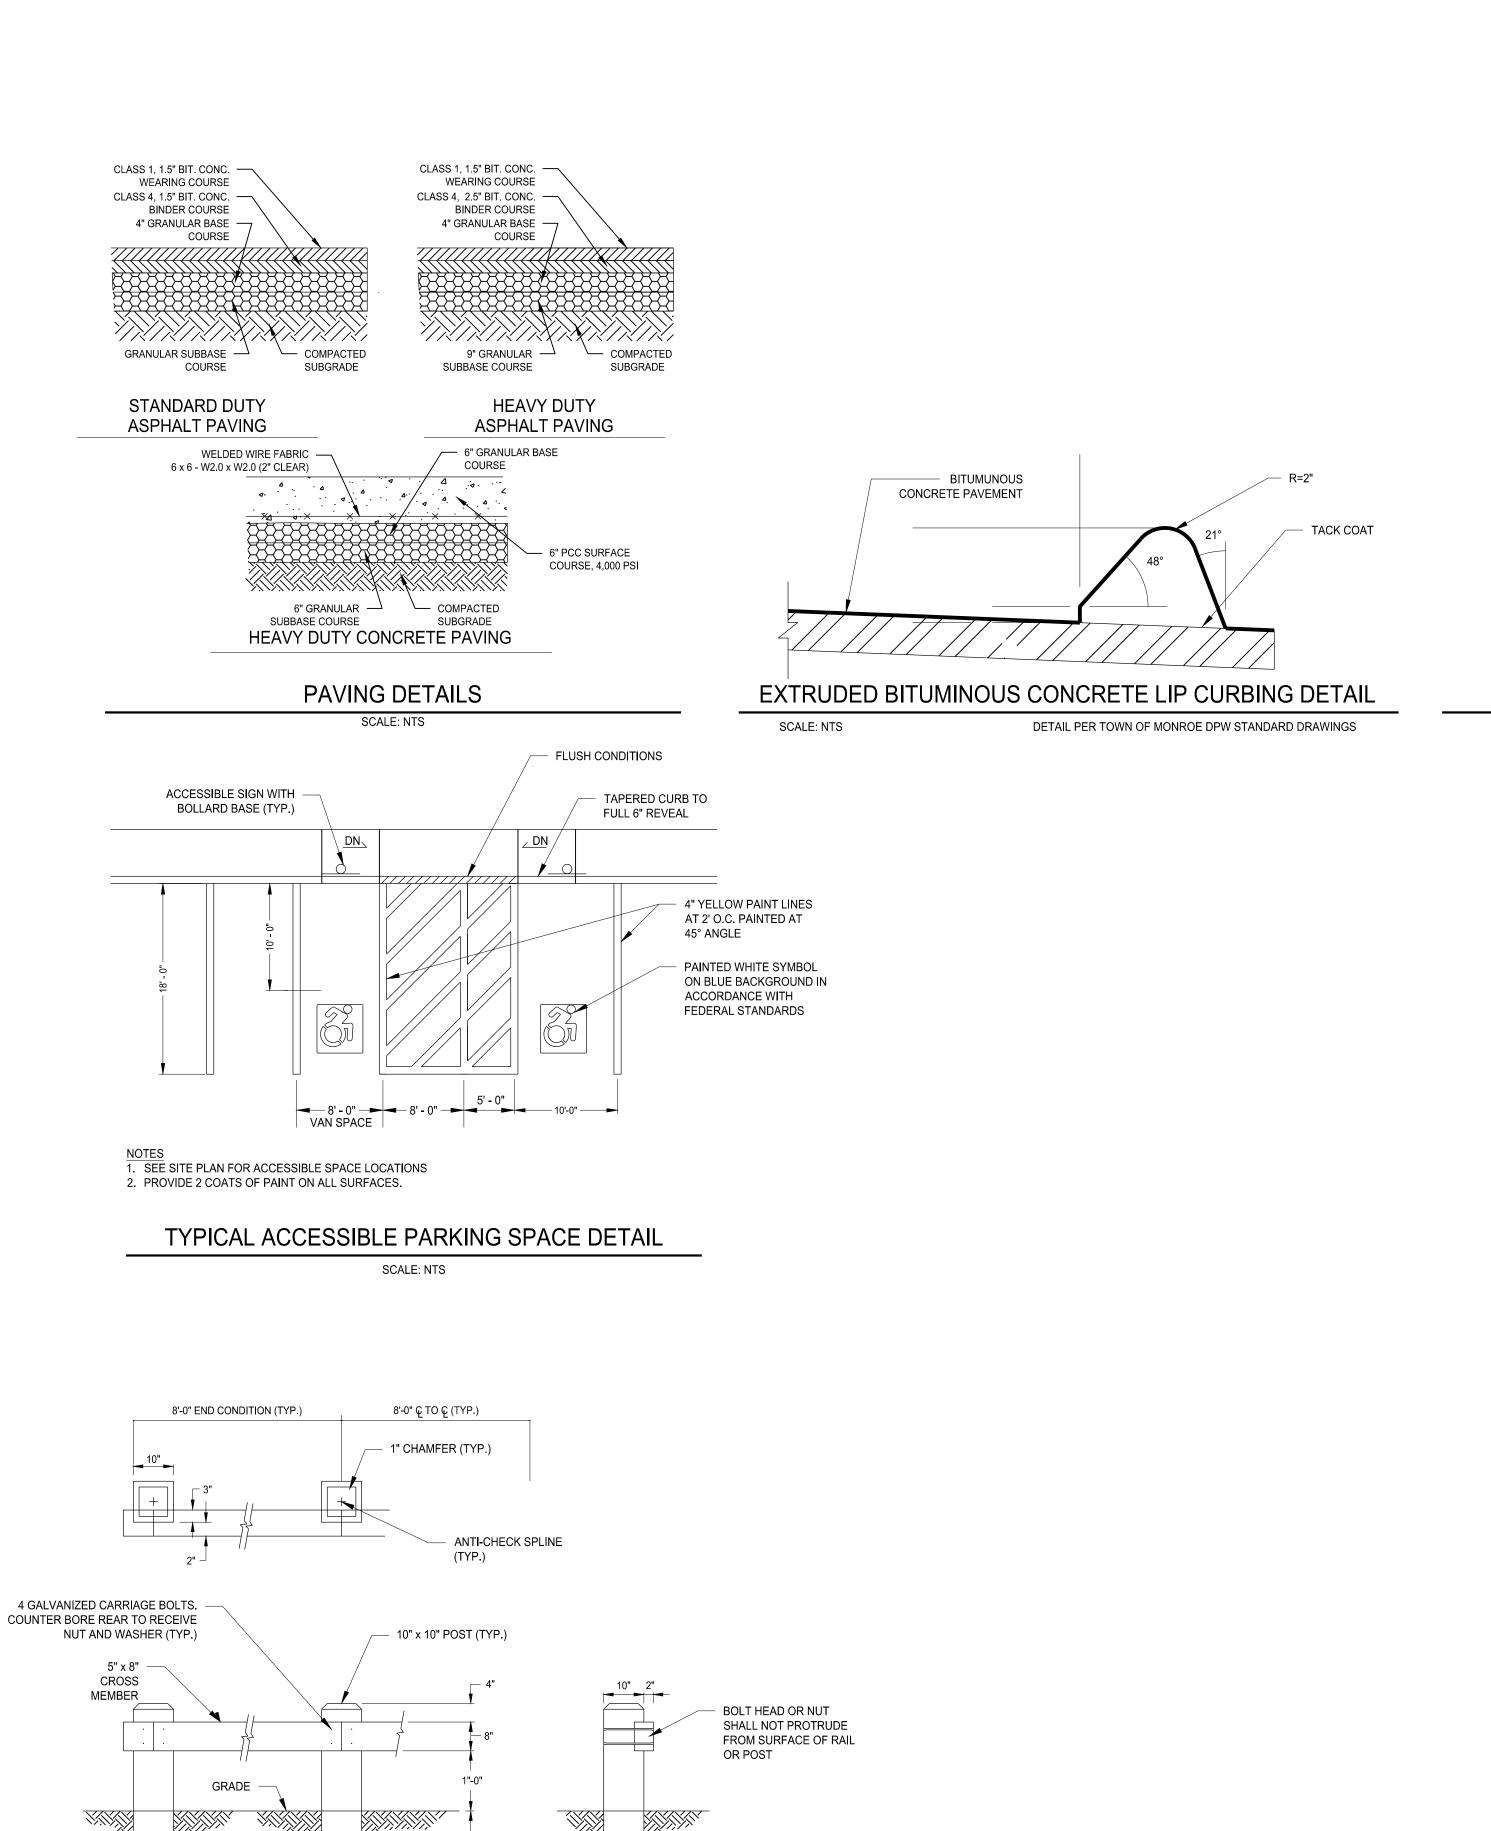

NOTES

1. ALL TIMBER TO BE PRESSURE TREATED CCA=0.40 PCF SOUTHERN YELLOW PINE


TIMBER GUIDE RAIL

SCALE: NTS


16d BOX NAIL GALV. 1 x 3 HORIZ. RAIL 12"Ø CONC. FOUNDATION -3/4 x 4 FACIA 1-1/2" BEVELED EDGE (TYP.) 1-3/16" x 1-5/8" END CLEAT POST **TOP VIEW** 3-1/4" **END VIEW** - 1-3/16" x 1-5/8" END CLEAT DARK BROWN WOOD STAIN - 1 x 3 HORIZONTAL RAIL - 3/4 x 4 FACIA BOARD Mid-Railis standard on 4 1/2' and over 1" (Typ.) CLEARANCE (UNDER FENCE) EXTRA LONG POST NEEDED FOR STEPPING —— 91" (INSIDE MEASURE) — 12"Ø CONC. FOUNDATION TYP. AT ALL CORNERS AND GATES DOUBLE GATE SECTION-FRAME SIDE FRAME SIDE

DUMPSTER PAD ENCLOSURE - BOARD ON BOARD FENCE

SCALE: NTS

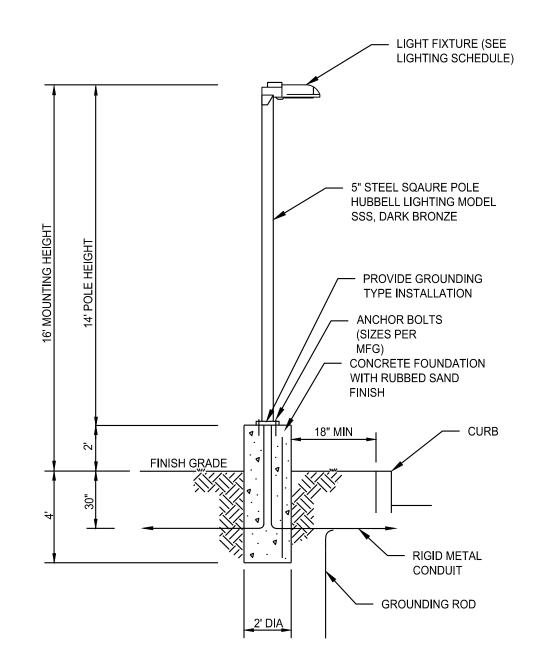

PROPOSED LIGHT POLE - P1 SCALE: NTS

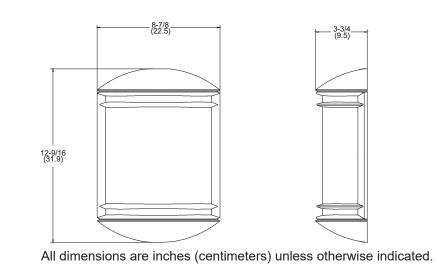

PROPOSED ACCENT LIGHT - AL1

LITHONIA ACCENT, MODEL OLCS9WH POWDER COATED ALUMINUM, WHITE SCALE: NTS

THIS DRAWING IS THE PROPERTY OF THE ENGINEER. IT HAS BEEN SPECIFICALLY PREPARED FOR THE OWNER FOR THIS PROJECT AT THIS SITE AND IS NOT TO BE USED FOR ANY
OTHER PURPOSE, LOCATION OR OWNER
WITHOUT WRITTEN CONSENT OF THE ENGINEER.



525 JOHN STREET BRIDGEPORT, CT. 0660 Office (203) 333-9465 fax (203) 336-1769 e-mail Info@FullerSurveyors

PLACE TOWNHOUSE I 18 POWERHOUSE F MONTVILLE, CONNEC MADISON

Job Number: FE24-1889

Job Start Date: 3/20/24

Drawn By: Checked By D.R.R.

Sheet Title:

DETAIL SHEET

Sheet Number:

APPROVED BY THE MONTVILLE INLAND WETLAND COMMISSION APPROVED BY THE MONTVILLE PLANNING AND ZONING COMMISSION EXPIRATION DATE SEC PLAN APPROVAL DATE